

Description	Colour	Part number	EAN number
RC-plus next 230 KNX-DX, white	white	93394	4007529933945
RC-plus next 230 KNX-DX, black	black	93395	4007529933952



white



black

Accessory	Colour	Part number	EAN number
IR-Adapter for Smartphones	black	92726	4007529927265
IR-PD-KNX		92123	4007529921232
IR-PD-KNX-Mini		93398	4007529933983
Wire basket BSK (Ø 164 x 143 mm)	white	92467	4007529924677
Outside corner socket for RC-plus next	white/black	97004/ 97024	4007529970049/ 4007529970247
Inside corner socket for RC-plus next	white	97005	4007529970056
IR-LM Infrared Luxmeter		93030	4007529930302


■ TECHNICAL DATA

Voltage:	24 V DC via KNX BUS
typ. power input:	12 mA
Detection area:	230°
Recommended mounting height:	2.5 m
Range:	max. Ø 20 m across max. Ø 6 m towards max. Ø 4 m anti-creep
Degree / class of protection:	IP54 / Class II
Operation mode:	Intelligent semi-automatic mode, Occupancy-independent regulating mode (photoelectric switch), Full automatic mode 1=Comfort, 2=Standby, 3=Economy, 4=Heat protection
HVAC operation modes:	
Ambient temperature:	-25 °C to +55 °C
Temperature measuring range:	-20 °C to +45 °C
Housing:	Polycarbonate, UV-resistant
Number of PIR sensors:	3
Remote control-capable:	IR-Adapter for Smartphones, IR-PD-KNX, IR-PD-KNX-Mini
Outputs:	1x light (for regulating or switching), 1x Slave, 3 separate HVAC outputs
Orientation light:	10 % - 100 % / OFF / 1 min - 255 min
Night light:	10 % - 100 %
Brightness set value:	5 - 2000 Lux


PRODUCT INFORMATION

- KNX occupancy detector with integrated KNX bus connector
- Individual adaption of detection sensitivity for each PIR sensor
- PIR sensors can be deactivated individually
- Anti-creep zone
- Detection area can be extended thanks to master-slave-mode
- Extensive optimization options for light measurement
- Measured light value is communicated to the bus
- Adaption of dimming curve
- Measuring of mixed light thanks to internal light sensor
- Determination of the reflection factor, e.g. on a desk, with the optional Infrared Luxmeter IR-LM
- Remote control capable (IR) via B.E.G. LUXOMAT® Remote Control App for Smartphones (IR-Adapter required)
- PIN code
- IR remote control-capable via IR remote control (optionally)
- IR remote control-capable via 5 button remote control, programmable at choice (accessory)
- Programming button (phys. address) can be operated via remote control
- Regulation/switching of three light groups via offset (external influence possible)
- Manual influence via external KNX push buttons possible
- Function control (heartbeat, cyclical sending)
- Short presence, self-adjusting follow-up time
- Occupancy simulation
- Forced switch-off
- Two logic modules
- Intelligent central-off function
- Recall of light scenes
- Direction of movement can be identified
- Premonition of switch-off
- Behaviour upon bus voltage return definable at choice
- Variable safety pause after switching off the lights
- Temperature sensor
- Settings ex ETS 4 for integration in KNX systems
- The product database for import into the ETS database can be downloaded from the B.E.G. homepage.
- Wall, ceiling and corner mounting


DIMENSIONS DRAWING

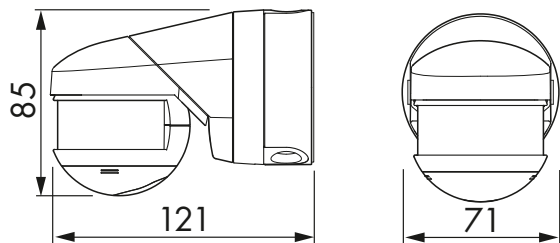

WIRING DIAGRAM

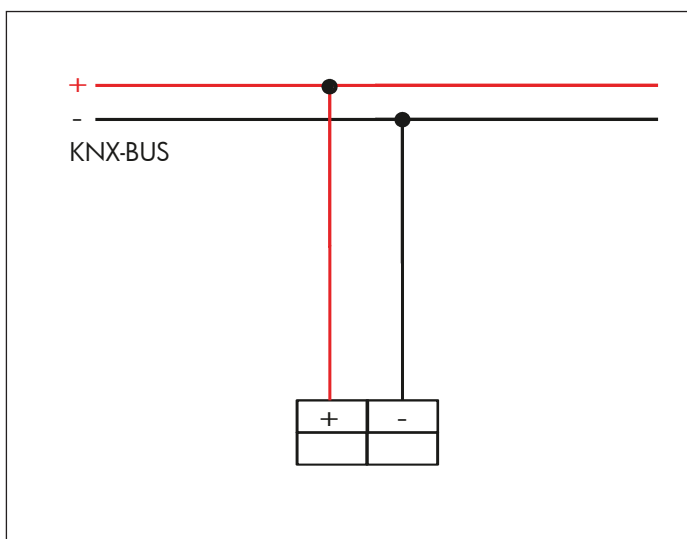

RANGE DIAGRAM

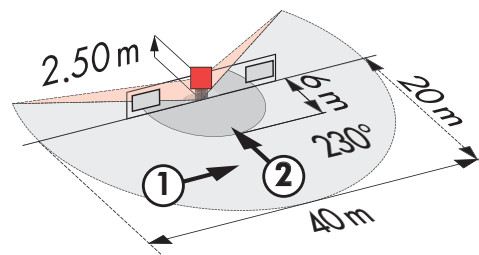

- ① Walking across
- ② Walking towards
- ③ Anti-creep zone