

Motion detector - Professional Line

HF 3360

V3 KNX - surface, rd.

EAN 4007841 058234



high frequency
sensor 360°



max. Ø 8 m



KNX



IP54



2 - 1000 lux



1 - 255 min



ideal 2 - 2,8 m

TEACH

Teach mode



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

Function description

Perfection through and through. High-frequency motion detector HF 3360, ideal for basement corridors, stairwells, multi-storey car parks, installation height 2.8 m, 360° angle of coverage, reach 1 – 8 m (radial), detection regardless of temperature, HF-sensor technology also detects movement through glass, wood and stud walls. Available either in round or square surface-mounted and concealed version.

HF 3360

V3 KNX - surface, rd.
EAN 4007841 058234

Technical specifications

| | |
|---|---|
| Type | Motion detectors |
| Dimensions (Ø x H) | 126 x 52 mm |
| Sensor Technology | High frequency |
| Application, place | Indoors |
| Installation site | wall, ceiling, corner |
| Installation | Surface wiring |
| Mounting height | 2,00 – 4,00 m |
| Reach, radial | Ø 8 m (50 m ²) |
| Reach, tangential | Ø 8 m (50 m ²) |
| HF-system | 5,8 GHz |
| Detection angle | 360 ° |
| Angle of aperture | 180 ° |
| Optimum mounting height | 2,8 m |
| Mechanical scalability | No |
| Sneak-by guard | Yes |
| Capability of masking out individual segments | No |
| Electronic scalability | Yes |
| Detection | also through glass, wood and stud walls |

| | |
|----------------------------|--|
| Twilight setting TEACH | Yes |
| Time setting | 0 s – 1092 Min. |
| Constant-lighting control | Yes |
| Basic light level function | Yes |
| KNX functions | Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate |
| With bus coupling | Yes |
| Settings via | ETS software, Remote control, Bus, Smart Remote |
| Interconnection | Yes |
| Type of interconnection | Master/slave |
| IP-rating | IP54 |
| Material | Plastic |
| Ambient temperature | -20 – 50 °C |
| Application, room | function room / ancillary room, stairwell, WC / washroom, multi-storey / underground car park, Indoors |
| Colour | white |
| Colour, RAL | 9003 |
| Manufacturer's Warranty | 5 years |
| Version | KNX - surface, rd. |
| PU1, EAN | 4007841058234 |


Accessories

| | |
|--------------------|--------------------------------|
| EAN 4007841 009151 | Remote control Smart Remote |
| EAN 4007841 593018 | Service remote control RC6 KNX |
| EAN 4007841 592912 | User remote control RC7 KNX |
| EAN 4007841 056698 | Black cover for HF 3360 |

HF 3360

V3 KNX - surface, rd.
EAN 4007841 058234

Detection Zone

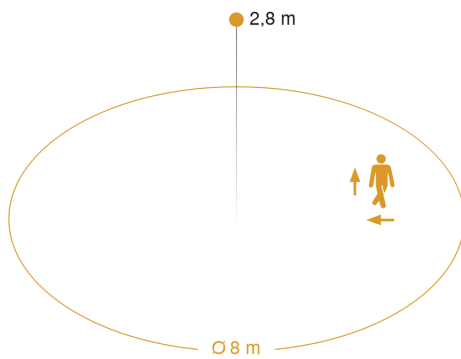

Mögliche Montagehöhe: 2,00 m – 4,00 m
Orange: radial und tangential

Dimension Drawing

