

KNX manual CO₂ sensor AMUN 716 S

Set basic KNX Multi (Basic device for Multisensor KNX)



Amun 716 S

7169230



Set basic KNX Multi

9070900

Contents

1	Function description	7
2	Operation	8
3	Technical data	9
4	The AMUN 716 S / Set basic KNX Multi application programme	10
4.1	Selection in the product database	10
4.2	Overview of communication objects	11
4.2.1	General	11
4.2.2	CO ₂ sensor	12
4.2.3	Humidity sensor	13
4.2.4	Room temperature controller (RTC)	14
4.2.5	External inputs I1-I4: Switch function	16
4.2.6	External inputs I1-I4: Button function	19
4.2.7	External inputs I1-I4: Dimming function	22
4.2.8	External inputs I1-I4: Blinds function	24
4.2.9	External inputs I3-I4: Temperature sensor function	25
4.2.10	Diagnosis and alarm objects	25
4.2.11	Measurement value calibration CO ₂	26
4.2.12	Comparator	26
4.3	Description of communication objects	27
4.3.1	General objects	27
4.3.2	Objects for the CO ₂ sensor	29
4.3.3	<i>Objects for the humidity sensor</i>	31
4.3.4	Objects for the room temperature controller (RTC)	33
4.3.5	Objects for the external inputs: Switch function	39
4.3.6	Objects for the external inputs: Button function	40
4.3.7	Objects for the external inputs: Dimming function	41
4.3.8	Objects for the external inputs: Blinds function	42
4.3.9	Objects for the external inputs I3 and I4: Temperature sensor function	43
4.3.10	Diagnosis and alarm objects	44
4.3.11	Objects for measurement value calibration	45
4.3.12	Objects for the comparator	45
4.4	Parameter pages overview	46
4.5	General parameters	48
4.5.1	General	48

4.5.2	Measurement values	49
4.6	CO ₂ sensor functional block	52
4.6.1	CO ₂ thresholds	52
4.6.2	Thresholds 1, 2, 3 CO ₂	54
4.6.3	Ventilating CO ₂	56
4.6.4	CO ₂ scenes	58
4.7	Humidity sensor functional block	59
4.7.1	Humidity thresholds	59
4.7.2	Humidity thresholds 1, 2, 3	60
4.7.3	Ventilating humidity	62
4.7.4	Humidity scenes	63
4.7.5	Dew point monitoring	64
4.8	Room temperature controller RTC functional block	65
4.8.1	Setting	65
4.8.2	Actual value	67
4.8.3	Operating Mode	70
4.8.4	Heating control	72
4.8.5	Heating setpoints	74
4.8.6	Additional stage heating	76
4.8.7	Cooling control	78
4.8.8	Cooling setpoints	80
4.8.9	Set point adjustment	81
4.8.10	Additional stage cooling	83
4.9	External inputs I1-I4 functional block	84
4.9.1	Switch function	84
4.9.2	Switch function I1, I2, I3, I4	87
4.9.3	Dimming function I1, I2, I3, I4	90
4.9.4	Blinds function I1, I2, I3, I4	95
4.9.5	Temperature sensor function (only I3 and I4)	99
4.9.6	Connection of the external inputs	101
4.10	Comparator functional block	102
5	Typical applications	104
5.1	Control of air quality plus 3 stage manual fan control.	104
5.1.1	Devices	104
5.1.2	Overview	104
5.1.3	Objects and links	105
5.1.4	Important parameter settings	106

5.2	Controlling ventilation flaps depending on room air quality (CO ₂) or heating/cooling demand.	108
5.2.1	Devices	108
5.2.2	Overview	108
5.2.3	Objects and links	108
5.2.4	Important parameter settings	109
5.3	CO ₂ -dependent ventilation with PI control	110
5.3.1	Devices	110
5.3.2	Overview	110
5.3.3	Objects and links	110
5.3.4	Important parameter settings	111
5.4	Base function: Humidity-dependent ventilation, single-stage.	112
5.4.1	Devices	112
5.4.2	Overview	112
5.4.3	Objects and links	112
5.4.4	Important parameter settings	112
5.5	Location school: Heating with presence detector and frost protection via window contact.	113
5.5.1	Devices	113
5.5.2	Overview	113
5.5.3	Objects and links	114
5.5.4	Important parameter settings	115
5.6	Location single-family house:	116
5.6.1	Heating with presence detector and frost protection via window contact.	116
5.6.2	Devices	116
5.6.3	Overview	116
5.6.4	Objects and links	117
5.6.5	Important parameter settings	118
5.7	Switching, dimming light and controlling blinds	119
5.7.1	Devices	119
5.7.2	Overview	119
5.7.3	Objects and links	120
5.7.4	Important parameter settings	120
5.8	Two-stage heating for floor and radiators	122
5.8.1	Devices	122
5.8.2	Overview	122
5.8.3	Objects and links	122

5.8.4	Important parameter settings	123
6	Typical application of multi-sensor KNX	124
6.1	Meeting room location: Automatic control of ventilation and lighting.	124
6.1.1	Devices	124
6.1.2	Overview	124
6.1.3	Objects and links	125
6.1.4	Important parameter settings	126
7	Appendix	127
7.1	CO ₂ guide values	127
7.2	LED colours for room air quality and temperature control	128
7.3	Switching response using the example of thresholds for CO ₂	129
7.4	Fan control	130
7.5	Relative humidity	131
7.6	Fresh air calibration	132
7.6.1	Calibration procedure	132
7.7	Comfort	133
7.8	PWM cycle	134
7.8.1	Basic principle	134
7.8.2	Response to changes in the actuating value	134
7.9	Operating mode as scene (RTC)	136
7.9.1	Principle	136
7.10	Setpoint shift	137
7.10.1	Format of set point correction: Relative	138
7.10.2	Format of set point correction: Absolute	139
7.11	Temperature control	140
7.11.1	Introduction	140
7.11.2	Response of the P controller	141
7.11.3	Response of the PI controller	143
7.12	Continuous and switching control	143
7.13	Hysteresis	144
7.13.1	Negative hysteresis:	144
7.13.2	Positive hysteresis	144
7.14	Dead zone	145
7.15	Operating mode selection	147
7.15.1	Priorities for operating mode selection	147
7.15.2	Determining the current operation mode	148
7.16	Determination of the setpoint	151
7.16.1	Setpoint calculation in heating mode	151
7.16.2	Setpoint calculation in cooling mode	152

7.17	Set point offset	153
7.18	Base setpoint and current setpoint	154
7.19	CO ₂ calibration	155
7.20	Comparator	155
7.21	Firmware version	156
7.21.1	Setpoint calculation	157

1 Function description

- CO₂ room air sensor with integrated individual room thermostat.
- Measures CO₂ concentration, relative humidity, temperature, and barometric air pressure.
- Three independent, configurable thresholds for CO₂ concentration and relative humidity.
- For controlling heating actuators or motorised actuators
- Two front panels are included in the scope of supply: an absolute and a relative scale.¹
- Buttons for presence or operating modes: comfort, standby, temperature reduction at night, frost protection.²
- 4 binary inputs for conventional switches/push buttons (switching, dimming, blinds), also for external temperature sensor, window contact or presence signal.
- Actions can be carried out if thresholds are exceeded or fallen below (send, priority, switching, value).
- Display of current operating mode and heating/cooling by multi-coloured LED.³
- CO₂ setting range of 500 - 2250 ppm (thresholds).
- Relative humidity of 1% to 100%.
- Basic module for multi-sensor KNX: For a complete multi-sensor KNX, the Prema KNX is always additionally required⁴
- Comparator for internal actuating values or external values.
- CO₂ calibration possible via object.

¹ Only Amun 716 S

² Only Amun 716 S

³ Only Amun 716 S

⁴ Only Set basic KNX Multi

2 Operation

The device has the following operating and display elements: ⁵

1. One LED for display of the CO₂ content.
2. One rotary knob for the base setpoint of the room temperature controller, or for set point offset.
3. One LED for display of the relative humidity.
4. One button for the selection of the operating mode, or for presence.
5. One four-coloured LED for display of the operating mode.
Red: comfort, **yellow:** standby, **green:** eco, **blue:** frost.
6. One LED for display of heating and cooling mode:
Red: heating, **orange:** comfort extension, **blue:** cooling.

⁵ Only Amun 716 S

3 Technical data

Operating voltage KNX	Bus voltage, I _{Bus} ≤ 15 mA
Type of connection	Bus connection: KNX bus terminal
Installation type	Wall-mounted ⁶ / Ceiling installation ⁷
Display ⁸	LEDs multi-coloured
Interface extension	max. 30 m
Ambient temperature	+5 °C ... +40 °C
Measurement range CO ₂	300 – 5000 ppm
Accuracy	0-1000 +/- (50 ppm + 3%) of the measured value 1001-2000 +/- (50 ppm + 5%) of the measured value >2000 +/- (100 ppm + 5%) of the measured value
Measurement range humidity	1 – 100 % rh (± 3 %)
Measurement range air pressure	30000 – 110000 Pa (± 100 Pa)
Measurement range temperature	-5 °C ... +45 °C (± 0,8 K)
Setting range temperature	+5 °C ... +32 °C
Number of external inputs	4
Contact voltage	5 V, provided internally
Contact current	0.5 mA / 5 mA (peak)
Protection rating	IP 20
Protection class	III in accordance with EN 60 730-1

⁶ Only Amun 716 S

⁷ Only Set basic KNX Multi


⁸ Only Amun 716 S

4 The AMUN 716 S / Set basic KNX Multi application programme

4.1 Selection in the product database

Manufacturer	Theben AG
Product family	Heating, ventilation, air conditioning
Product type	Room air sensor with controller
Program name	AMUN 716 S

Number of communication objects	90 ⁹ / 89 ¹⁰
Number of group addresses	255
Number of associations	255

 The ETS database can be found on our website: www.theben.de/en/downloads_en

⁹ Only Amun 716 S

¹⁰ Only Set basic KNX Multi

4.2 Overview of communication objects

4.2.1 General

No.	Object name	Function	Length	R	W	C	T	DPT
1	<i>CO₂ value</i>	<i>Send</i>	2 bytes	R	-	C	T	9.008
2	<i>Relative humidity</i>	<i>Send</i>	2 bytes	R	-	C	T	9.007
3	<i>Temperature value</i>	<i>Send</i>	2 bytes	R	-	C	T	9.001
4	<i>Air pressure</i>	<i>Send</i>	4 bytes	R	-	C	T	14.058
5	<i>Degree of comfort</i>	<i>Send</i>	1 byte	R	-	C	T	5.001
6	<i>Device LEDs¹¹</i>	<i>Reduced</i>	1 bit	-	W	C	-	1.001
		<i>Brightness</i>	1 byte	-	W	C	-	5.001
7	<i>CO₂ fresh air calibration</i>	<i>Release</i>	1 bit	-	W	C	-	1.001

¹¹ Only Amun 716 S

4.2.2 CO₂ sensor

No.	Object name	Function	Length	R	W	C	T	DPT
8	CO ₂ threshold 1	Switching	1 bit	-	-	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		0-100%	1 byte	-	-	C	T	5.001
		0-255	1 byte	-	-	C	T	5.010
9	CO ₂ threshold 1	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
10	CO ₂ threshold 1	Setting/reading threshold	2 bytes	R	W	C	T	9.008
11	CO ₂ threshold 2	Switching	1 bit	-	-	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		0-100%	1 byte	-	-	C	T	5.001
		0-255	1 byte	-	-	C	T	5.010
12	CO ₂ threshold 2	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
13	CO ₂ threshold 2	Setting/reading threshold	2 bytes	R	W	C	T	9.008
14	CO ₂ threshold 3	Switching	1 bit	-	-	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		0-100%	1 byte	-	-	C	T	5.001
		0-255	1 byte	-	-	C	T	5.010
15	CO ₂ threshold 3	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
16	CO ₂ threshold 3	Setting/reading threshold	2 bytes	R	W	C	T	9.008
17	Ventilating CO ₂	Actuating value 0-100%	1 byte	-	-	C	T	5.001
		Actuating value 0-255	1 byte	-	-	C	T	5.010
18	Ventilating CO ₂	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
19	Ventilating CO ₂	Setting/reading CO ₂ setpoint	2 bytes	R	W	C	T	9.008
20	CO ₂ scenes	Send	1 byte	-	-	C	T	17.001
21	CO ₂ scenes	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003

4.2.3 Humidity sensor

No.	Object name	Function	Length	R	W	C	T	DPT
22	<i>Humidity threshold 1</i>	<i>Switching</i>	1 bit	-	-	C	T	1.001
		<i>Priority</i>	2 bit	-	-	C	T	2.001
		<i>0-100%</i>	1 byte	-	-	C	T	5.001
		<i>0-255</i>	1 byte	-	-	C	T	5.010
23	<i>Humidity threshold 1</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003
24	<i>Humidity threshold 1</i>	<i>Setting/reading threshold</i>	2 bytes	R	W	C	T	9.007
25	<i>Humidity threshold 2</i>	<i>Switching</i>	1 bit	-	-	C	T	1.001
		<i>Priority</i>	2 bit	-	-	C	T	2.001
		<i>0-100%</i>	1 byte	-	-	C	T	5.001
		<i>0-255</i>	1 byte	-	-	C	T	5.010
26	<i>Humidity threshold 2</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003
27	<i>Humidity threshold 2</i>	<i>Setting/reading threshold</i>	2 bytes	R	W	C	T	9.007
28	<i>Humidity threshold 3</i>	<i>Switching</i>	1 bit	-	-	C	T	1.001
		<i>Priority</i>	2 bit	-	-	C	T	2.001
		<i>0-100%</i>	1 byte	-	-	C	T	5.001
		<i>0-255</i>	1 byte	-	-	C	T	5.010
29	<i>Humidity threshold 3</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003
30	<i>Humidity threshold 3</i>	<i>Setting/reading threshold</i>	2 bytes	R	W	C	T	9.007
31	<i>Ventilating humidity</i>	<i>Actuating value 0-100%</i>	1 byte	-	-	C	T	5.001
		<i>Actuating value 0-255</i>	1 byte	-	-	C	T	5.010
32	<i>Ventilating humidity</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003
33	<i>Humidity scenes</i>	<i>Send</i>	1 byte	-	-	C	T	17.001
34	<i>Humidity scenes</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003
35	<i>Dew point alarm</i>	<i>Send</i>	1 bit	R	-	C	T	1.005

4.2.4 Room temperature controller (RTC)

No.	Object name	Function	Length	R	W	C	T	DPT
40	Base setpoint	Defining the set point temperature	2 bytes	-	W	C	-	9.001
	Base setpoint at rotary control ¹²	Send	2 bytes	R	-	C	T	9.001
41	Manual set point offset	Receive	2 bytes	-	W	C	-	9.002
	Set point offset at rotary control ¹³	Send	2 bytes	R	-	C	T	9.002
42	Outdoor temperature compensation	Send	2 bytes	R	-	C	T	9.001
		Adjust setpoint	2 bytes	-	W	C	-	9.002
43	Operating mode preset	Receive	1 byte	-	W	C	-	20.102
	Night <-> standby	Receive	1 bit	-	W	C	-	1.001
44	Comfort	Receive	1 bit	-	W	C	-	1.003
	Presence	Receive	1 bit	-	W	C	-	1.018
45	Window status	Closed=0, open=1	1 bit	-	W	C	-	1.019
	Frost	Receive	1 bit	-	W	C	-	1.003
46	Current operating mode	Send	1 byte	R	-	C	T	20.102
47	Operating mode as scene	Save/ call up	1 byte	-	W	C	T	18.001
48	Heating actuating value	Send	1 bit	-	-	C	T	1.001
		Send	1 byte	-	-	C	T	5.001
48	Heating/cooling actuating value	Send	1 bit	-	-	C	T	1.001
		Send	1 byte	-	-	C	T	5.001
49	PWM heating additional stage	Send	1 bit	-	-	C	T	1.001
	Actuating value additional heating stage	Send	1 byte	-	-	C	T	5.001
50	Cooling actuating value	Send	1 bit	-	-	C	T	1.001
		Send	1 byte	-	-	C	T	5.001
51	PWM cooling additional stage	Send	1 bit	-	-	C	T	1.001
	Actuating value additional cooling stage	Send	1 byte	-	-	C	T	5.001
52	Send heating mode/cooling mode	0 = heating, 1 = cooling	1 bit	R	-	C	T	1.001
		0 = cooling, 1 = heating	1 bit	R	-	C	T	1.100
	Switching between heating and cooling	0 = heating, 1 = cooling	1 bit	-	W	C	-	1.001
		0 = cooling, 1 = heating	1 bit	-	W	C	-	1.100
53	Current setpoint	Setting/sending	2 bytes	-	W	C	T	9.001
54	Control actual value	Send	2 bytes	R	-	C	T	9.001
55	External actual value	Receive	2 bytes	-	W	C	-	9.001

¹² Only Amun 716 S

¹³ Only Amun 716 S

No.	Object name	Function	Length	R	W	C	T	DPT
56	<i>Actual value failure</i>	<i>Send</i>	1 bit	R	-	C	T	1.001
57	<i>Outdoor temperature</i>	<i>Receive</i>	2 bytes	-	W	C	-	9.001
58	<i>Dew point alarm</i>	<i>Receive</i>	1 bit	-	W	C	-	1.005

4.2.5 External inputs I1-I4: Switch function

No.	Object name	Function	Length	R	W	C	T	DPT
60	Channel I1.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
61	Channel I1.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
62	Channel I1.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
64	Channel I1	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
65	Channel I2.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
66	Channel I2.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
67	Channel I2.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
67	Channel I2.3	Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx

No.	Object name	Function	Length	R	W	C	T	DPT
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
69	Channel I2	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
70	Channel I3.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
71	Channel I3.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
72	Channel I3.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
74	Channel I3	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
75	Channel I4.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
76	Channel I4.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
77	Channel I4.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001

No.	Object name	Function	Length	R	W	C	T	DPT
		<i>Send value</i>	1 byte	-	-	C	T	5.010
		<i>2 byte 9.x</i>	2 bytes	-	-	C	T	9.xxx
		<i>4 byte 14.x</i>	4 bytes	-	-	C	T	14.xxx
79	<i>Channel 14</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003

4.2.6 External inputs I1-I4: Button function

No.	Object name	Function	Length	R	W	C	T	DPT
60	Channel I1.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
61	Channel I1.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
62	Channel I1.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
64	Channel I1	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
65	Channel I2.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
66	Channel I2.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
67	Channel I2.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
67	Channel I2.3	Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx

No.	Object name	Function	Length	R	W	C	T	DPT
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
69	Channel I2	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
70	Channel I3.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
71	Channel I3.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
72	Channel I3.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
74	Channel I3	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
75	Channel I4.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
76	Channel I4.2	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
77	Channel I4.3	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001

No.	Object name	Function	Length	R	W	C	T	DPT
		<i>Send value</i>	1 byte	-	-	C	T	5.010
		<i>2 byte 9.x</i>	2 bytes	-	-	C	T	9.xxx
		<i>4 byte 14.x</i>	4 bytes	-	-	C	T	14.xxx
79	<i>Channel 14</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003

4.2.7 External inputs I1-I4: Dimming function

No.	Object name	Function	Length	R	W	C	T	DPT
60	Channel I1	Switching	1 bit	-	W	C	T	1.001
61	Channel I1	Brighter/darker	4 bit	-	-	C	T	3.007
62	Channel I1.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
64	Channel I1	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
65	Channel I2	Switching	1 bit	-	W	C	T	1.001
		Switching	1 bit	-	-	C	T	1.001
66	Channel I2	Brighter/darker	4 bit	-	-	C	T	3.007
67	Channel I2.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
69	Channel I2	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
70	Channel I3	Switching	1 bit	-	W	C	T	1.001
		Switching	1 bit	-	-	C	T	1.001
71	Channel I3	Brighter/darker	4 bit	-	-	C	T	3.007
72	Channel I3.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
74	Channel I3	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
75	Channel I4	Switching	1 bit	-	W	C	T	1.001
		Switching	1 bit	-	-	C	T	1.001
76	Channel I4	Brighter/darker	4 bit	-	-	C	T	3.007
77	Channel I4.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001

No.	Object name	Function	Length	R	W	C	T	DPT
		<i>Send value</i>	1 byte	-	-	C	T	5.010
		<i>2 byte 9.x</i>	2 bytes	-	-	C	T	9.xxx
		<i>4 byte 14.x</i>	4 bytes	-	-	C	T	14.xxx
79	<i>Channel 14</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003

4.2.8 External inputs I1-I4: Blinds function

No.	Object name	Function	Length	R	W	C	T	DPT
60	Channel I1	Step/stop	1 bit	-	-	C	T	1.010
61	Channel I1	UP/DOWN	1 bit	-	W	C	T	1.008
		UP	1 bit	-	-	C	T	1.008
		DOWN	1 bit	-	-	C	T	1.008
62	Channel I1.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Height %	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
63	Channel I1.2	Slat %	1 byte	-	-	C	T	5.001
64	Channel I1	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
65	Channel I2	Step/stop	1 bit	-	-	C	T	1.010
66	Channel I2	UP/DOWN	1 bit	-	W	C	T	1.008
		UP	1 bit	-	-	C	T	1.008
		DOWN	1 bit	-	-	C	T	1.008
67	Channel I2.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Height %	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
		2 byte 9.x	2 bytes	-	-	C	T	9.xxx
		4 byte 14.x	4 bytes	-	-	C	T	14.xxx
68	Channel I2.2	Slat %	1 byte	-	-	C	T	5.001
69	Channel I2	Block = 1	1 bit	-	W	C	-	1.001
		Block = 0	1 bit	-	W	C	-	1.003
70	Channel I3	Step/stop	1 bit	-	-	C	T	1.010
71	Channel I3	UP	1 bit	-	-	C	T	1.008
		UP/DOWN	1 bit	-	W	C	T	1.008
		DOWN	1 bit	-	-	C	T	1.008
72	Channel I3.1	Switching	1 bit	-	W	C	T	1.001
		Priority	2 bit	-	-	C	T	2.001
		Height %	1 byte	-	-	C	T	5.001
		Send percentage value	1 byte	-	-	C	T	5.001
		Send value	1 byte	-	-	C	T	5.010
72	Channel I3.1	2 byte 9.x	2 bytes	-	-	C	T	9.xxx

No.	Object name	Function	Length	R	W	C	T	DPT
		<i>4 byte 14.x</i>	4 bytes	-	-	C	T	14.xxx
73	<i>Channel I3.2</i>	<i>Slat %</i>	1 byte	-	-	C	T	5.001
74	<i>Channel I3</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003
75	<i>Channel I4</i>	<i>Step/stop</i>	1 bit	-	-	C	T	1.010
76	<i>Channel I4</i>	<i>UP</i>	1 bit	-	-	C	T	1.008
		<i>UP/DOWN</i>	1 bit	-	W	C	T	1.008
		<i>DOWN</i>	1 bit	-	-	C	T	1.008
77	<i>Channel I4.1</i>	<i>Switching</i>	1 bit	-	W	C	T	1.001
		<i>Priority</i>	2 bit	-	-	C	T	2.001
		<i>Send percentage value</i>	1 byte	-	-	C	T	5.001
		<i>Height %</i>	1 byte	-	-	C	T	5.001
		<i>Send value</i>	1 byte	-	-	C	T	5.010
		<i>2 byte 9.x</i>	2 bytes	-	-	C	T	9.xxx
		<i>4 byte 14.x</i>	4 bytes	-	-	C	T	14.xxx
78	<i>Channel I4.2</i>	<i>Slat %</i>	1 byte	-	-	C	T	5.001
79	<i>Channel I4</i>	<i>Block = 1</i>	1 bit	-	W	C	-	1.001
		<i>Block = 0</i>	1 bit	-	W	C	-	1.003

4.2.9 External inputs I3-I4: Temperature sensor function

No.	Object name	Function	Length	R	W	C	T	DPT
70	<i>Channel I3.1</i>	<i>Temperature actual value</i>	2 bytes	R	-	C	T	9.001
75	<i>Channel I4.1</i>	<i>Temperature actual value</i>	2 bytes	R	-	C	T	9.001

4.2.10 Diagnosis and alarm objects

No.	Object name	Function	Length	R	W	C	T	DPT
80	<i>Firmware</i>	<i>Version</i>	2 bytes	R	-	C	T	217.001
81	<i>Alarm</i>	<i>Info</i>	6 bytes	R	-	C	T	219.001
83	<i>Alarm</i>	<i>Error text</i>	14 bytes	R	-	C	T	16.000

4.2.11 Measurement value calibration CO₂

No.	Object name	Function	Length	R	W	C	T	DPT
84	<i>CO₂ offset</i>	<i>Measurement value offset</i>	2 bytes	-	W	C	-	9.* ¹⁴
85	<i>CO₂ reference</i>	<i>Receive measurement value</i>	2 bytes	-	W	C	-	9.008

4.2.12 Comparator

No.	Object name	Function	Length	R	W	C	T	DPT
86	<i>Comparator</i>	<i>Input 1</i>	1 byte	-	W	C	-	5.001
87	<i>Comparator</i>	<i>Input 2</i>	1 byte	-	W	C	-	5.001
88	<i>Comparator</i>	<i>Input 3</i>	1 byte	-	W	C	-	5.001
89	<i>Comparator</i>	<i>Output</i>	1 byte	R	-	C	T	5.001

¹⁴ DPT9.* 2 byte floating value.

4.3 Description of communication objects

4.3.1 General objects

Object 1: CO₂ value

Sends the measured CO₂ content.

Object 2: Relative humidity

Sends the measured relative humidity and percent.

Object 3: Temperature value

Sends the room temperature in °C, measured with the temperature sensor inside the device.

Object 4: Air pressure

Sends the measured air pressure of the atmosphere in Pascal (Pa).

In meteorology, the air pressure is usually stated in Hectopascal (hPa).

1 Hectopascal (hPa) = 100 Pa



Note: 1 hPa corresponds to 1 mbar.

Object 5: Degree of comfort

The degree of comfort comprises 3 states, which are reported as a percentage value in fixed increments (see in the Appendix: [Comfort](#))

Status	Value
Comfortable	100%
Still comfortable	50%
Uncomfortable	10%

*Object 6: Device LEDs*¹⁵

The brightness of the device LEDs can be changed via bus, if desired.

(See **General** parameter page).

Depending on the parameter setting (*object type*), 2 formats are possible.

Object type	Format	Object function
Via switch object	1 bit	Activate preset reduced brightness.
Via percentage value	1 byte	Set LED brightness individually via bus telegram.

¹⁵ Only Amun 716 S

Object 7: Fresh air calibration

For initialising a calibration procedure of the device
(see in the Appendix: [Fresh air calibration](#)).



If the device is properly used, a calibration procedure is not necessary.



A wrong calibration can cause malfunctions of the device and the connected systems.
Please use the calibration only if absolutely necessary.

4.3.2 Objects for the CO₂ sensor

Object 8: Threshold 1 CO₂

Initial object for the first CO₂ threshold.

Depending on the parameter setting, a telegram can be sent when exceeding or falling below the set threshold.

The format can be configured as a switch, priority, percentage, or value telegram (see above, [Overview of communication objects, CO₂ sensor](#)).

Object 9: Block CO₂ threshold 1

Block object for the threshold.

The acting direction (block with 1 or with 0) can be configured.

Object 10: Threshold 1 CO₂ – setting/reading threshold

Allows a subsequent change of the threshold via bus telegram at any time.

Object 11: CO₂ threshold 2

Output object for the second CO₂ threshold.

Depending on the parameter setting, a telegram can be sent when exceeding or falling below the set threshold.

The format can be configured as a switch, priority, percentage, or value telegram (see above, [Overview of communication objects, CO₂ sensor](#)).

Object 12: Block CO₂ threshold 2

Block object for the threshold.

The acting direction (block with 1 or with 0) can be configured.

Object 13: CO₂ threshold 2 – setting/reading threshold

Allows a subsequent change of the threshold via bus telegram at any time.

Object 14: CO₂ threshold 3

Initial object for the first CO₂ threshold.

Depending on the parameter setting, a telegram can be sent when exceeding or falling below the set threshold.

The format can be configured as a switch, priority, percentage, or value telegram (see above, [Overview of communication objects, CO₂ sensor](#)).

Object 15: Block CO₂ threshold 3

Block object for the threshold.

The acting direction (block with 1 or with 0) can be configured.

Object 16: CO₂ threshold 3 – setting/reading threshold

Allows a subsequent change of the threshold via bus telegram at any time.

Object 17: Ventilation of CO₂ - actuating value

Actuating value for ventilation actuator (1 byte telegram).

This object is used if ventilation is only to be activated by the CO₂ content, such as in conference rooms.

The format can be configured as a percentage, or value telegram.

Object 18: Block CO₂ ventilation

Block object for CO₂ dependent ventilation

The acting direction (block with 1 or with 0) can be configured.

Object 19: Ventilation of CO₂ – setting/reading setpoint

Only with *fan control = via PI controller*.

Allows a subsequent change of the CO₂ control setpoint via bus telegram at any time.

Permissible values: 400–1000 ppm. Higher or lower values are not accepted.

Deleting value set via object and restoring ETS value:

When receiving a 0, the previously downloaded ETS setpoint will be restored.

Object 20: Send CO₂ scenes

Sends scene numbers depending on the CO₂ thresholds.

Scene	Telegram		Scene	Telegram		Scene	Telegram		Scene	Telegram	
No.	Hex.	Dec.	No.	Hex.	Dec.	No.	Hex.	Dec.	No.	Hex.	Dec.
1	\$00	0	17	\$10	16	33	\$20	32	49	\$30	48
2	\$01	1	18	\$11	17	34	\$21	33	50	\$31	49
3	\$02	2	19	\$12	18	35	\$22	34	51	\$32	50
4	\$03	3	20	\$13	19	36	\$23	35	52	\$33	51
5	\$04	4	21	\$14	20	37	\$24	36	53	\$34	52
6	\$05	5	22	\$15	21	38	\$25	37	54	\$35	53
7	\$06	6	23	\$16	22	39	\$26	38	55	\$36	54
8	\$07	7	24	\$17	23	40	\$27	39	56	\$37	55
9	\$08	8	25	\$18	24	41	\$28	40	57	\$38	56
10	\$09	9	26	\$19	25	42	\$29	41	58	\$39	57
11	\$0A	10	27	\$1A	26	43	\$2A	42	59	\$3A	58
12	\$0B	11	28	\$1B	27	44	\$2B	43	60	\$3B	59
13	\$0C	12	29	\$1C	28	45	\$2C	44	61	\$3C	60
14	\$0D	13	30	\$1D	29	46	\$2D	45	62	\$3D	61
15	\$0E	14	31	\$1E	30	47	\$2E	46	63	\$3E	62
16	\$0F	15	32	\$1F	31	48	\$2F	47	64	\$3F	63

Object 21: Block CO₂ scenes

Block object for the CO₂ dependent scenes

The acting direction (block with 1 or with 0) can be configured.

4.3.3 *Objects for the humidity sensor*

Object 22: Humidity threshold 1

Initial object for the first humidity threshold.

Depending on the parameter setting, a telegram can be sent when exceeding or falling below the set threshold.

The format can be configured as a switching, priority, percentage, or value telegram (see above, [Overview of communication objects, humidity sensor](#)).

Object 23: Block humidity threshold 1

Block object for the threshold.

The acting direction (block with 1 or with 0) can be configured.

Object 24: Humidity threshold 1 – setting/reading threshold

Allows a subsequent change of the threshold via bus telegram at any time.

Object 25: Humidity threshold 2

Initial object for the second humidity threshold.

Depending on the parameter setting, a telegram can be sent when exceeding or falling below the set threshold.

The format can be configured as a switching, priority, percentage, or value telegram (see above, [Overview of communication objects, humidity sensor](#)).

Object 26: Block humidity threshold 2

Block object for the threshold.

The acting direction (block with 1 or with 0) can be configured.

Object 27: Humidity threshold 2 – setting/reading threshold

Allows a subsequent change of the threshold via bus telegram at any time.

Object 28: Humidity threshold 3

Initial object for the first humidity threshold.

Depending on the parameter setting, a telegram can be sent when exceeding or falling below the set threshold.

The format can be configured as a switching, priority, percentage, or value telegram (see above, [Overview of communication objects, humidity sensor](#)).

Object 29: Block humidity threshold 3

Block object for the threshold.

The acting direction (block with 1 or with 0) can be configured.

Object 30: Humidity threshold 3 – setting/reading threshold

Allows a subsequent change of the threshold via bus telegram at any time.

Object 31: Ventilation of humidity - actuating value

Actuating value for ventilation actuator (1 byte telegram).

This object is used if ventilation is to be activated only because of the humidity.

The format can be configured as a percentage, or value telegram.

Object 32: Block ventilation of humidity

Block object for humidity-dependent ventilation

The acting direction (block with 1 or with 0) can be configured.

Object 33: Send humidity scenes

Sends scene numbers depending on the humidity thresholds.

Scene	Telegram		Scene	Telegram		Scene	Telegram		Scene	Telegram	
No.	Hex.	Dec.	No.	Hex.	Dec.	No.	Hex.	Dec.	No.	Hex.	Dec.
1	\$00	0	17	\$10	16	33	\$20	32	49	\$30	48
2	\$01	1	18	\$11	17	34	\$21	33	50	\$31	49
3	\$02	2	19	\$12	18	35	\$22	34	51	\$32	50
4	\$03	3	20	\$13	19	36	\$23	35	52	\$33	51
5	\$04	4	21	\$14	20	37	\$24	36	53	\$34	52
6	\$05	5	22	\$15	21	38	\$25	37	54	\$35	53
7	\$06	6	23	\$16	22	39	\$26	38	55	\$36	54
8	\$07	7	24	\$17	23	40	\$27	39	56	\$37	55
9	\$08	8	25	\$18	24	41	\$28	40	57	\$38	56
10	\$09	9	26	\$19	25	42	\$29	41	58	\$39	57
11	\$0A	10	27	\$1A	26	43	\$2A	42	59	\$3A	58
12	\$0B	11	28	\$1B	27	44	\$2B	43	60	\$3B	59
13	\$0C	12	29	\$1C	28	45	\$2C	44	61	\$3C	60
14	\$0D	13	30	\$1D	29	46	\$2D	45	62	\$3D	61
15	\$0E	14	31	\$1E	30	47	\$2E	46	63	\$3E	62
16	\$0F	15	32	\$1F	31	48	\$2F	47	64	\$3F	63

Object 34: Block humidity scenes

Block object for the humidity-dependent scenes

The acting direction (block with 1 or with 0) can be configured.

Object 35: Send dew point alarm

Only available if *monitor dew point = yes* is set (**humidity thresholds** parameter page).

Sends a 1 if the temperature approaches the dew point, due to the air humidity.



For use with the RTC, the object has to be connected with the RTC object *dew point alarm* – receive via group address.

4.3.4 Objects for the room temperature controller (RTC)


Object 40: Base setpoint

The function of the object is defined by the parameter *Rotary control function*. ¹⁶

Parameter: <i>Rotary control function</i>	Object function
Base setpoint ¹⁷	Sends the base setpoint set at the rotary control.
Manual offset or blocked	Receives the base setpoint from the bus. The base setpoint is first specified via the application at start-up and stored in the <i>base setpoint</i> object. Afterwards, it can be specified again at any time this object (limited by the <i>minimum</i> or <i>maximum valid setpoint</i>).

Object 41: Manual set point offset / set point offset at rotary control ¹⁸

The function of the object is defined by the parameter *Rotary control function*. ¹⁹

Rotary control function	Object function	Data direction
Base setpoint ²⁰ , or blocked ²¹	Receive manual set point offset. The object receives a temperature difference. The desired room temperature (current setpoint) can be adjusted against the base setpoint by this difference. The following applies in comfort mode (heating): Current setpoint = base setpoint + manual set point offset. Values outside the configured range are limited to the highest or lowest value. If a 0 is received, a previously entered set point offset is reset to 0 K. <div style="border: 1px solid black; padding: 5px; margin-top: 10px;">  The offset always refers to the set base setpoint and not to the current setpoint. </div>	Receive
Manual offset ²²	Sends the set point offset set at the rotary control.	Send

¹⁶ Only Amun 716 S

¹⁷ Only Amun 716 S

¹⁸ Only Amun 716 S

¹⁹ Only Amun 716 S

²⁰ Only Amun 716 S

²¹ Set basic KNX Multi

²² Only Amun 716 S

Object 42: Outdoor temperature compensation / adjust setpoint

The function of the object is defined by the parameter *setpoint adjustment at high outside temperature*.

Setpoint adjustment at high outside temperature	Object function	Data direction
Receive only	Receives set point correction for outdoor temperature compensation.	Receive
Calculate internally and send	Reports the current set point correction as an amount or as a differential. The format of the correction value (see following table) is set on the <i>set point adjustment</i> parameter page.	Send
None		

Format of correction value	Object function	Example
Absolute	Sends the amount: Unadjusted base setpoint + set point correction as setpoint for additional temperature controllers.	Unadjusted base setpoint = 20 °C. Setpoint correction = +2 K The object transmits: 22 °C
Relative	Calculated setpoint correction (in Kelvin) based on outside temperature.	Unadjusted base setpoint = 20 °C. Setpoint correction = +2 K The object sends: 2 K


Object 43: Operating mode preset or night <-> standby

The function of the object is defined by the parameter *Objects for determining the operating mode*.

Objects for determining the operating mode	Object function
new: operating mode, presence, window status	Here, it is a 1 byte object. One of 4 operating modes can be directly activated. 1 = Comfort 2 = Standby 3 = Night, 4 = Frost protection (heat protection) The configured <i>operating mode after reset</i> is active until a new valid operating mode is received or changed at the device by the user.
old: comfort, night, frost	With this setting, the object is a 1 bit object. It can be used to activate the operating mode Night or Standby 0=Standby 1=Night

Object 44: Presence or comfort.

The function of the object is defined by the parameter *Objects for determining the operating mode*.

Objects for determining the operating mode	Object function
new: operating mode, presence, window status	<p>Presence: The status of a presence detector (e.g. push button, motion detector) can be received via this object. 1 on this object activates the comfort operating mode.</p>
old: comfort, night, frost	<p>Comfort: 1 on this object activates the comfort operating mode. This operating mode takes priority over night and standby modes. Comfort mode is disabled again by sending a 0 to the object.</p> <hr/> <p> It should not be sent cyclically on this object, since a comfort extension (via the button at the device) will be deleted if a 0 is received.</p>

Object 45: Window status, or frost/heat protection

The function of the object is defined by the parameter *Objects for determining the operating mode*.

Objects for determining the operating mode	Object function
new: operating mode, presence, window status	<p>Window setting: The status of a window contact can be received via this object. 1 on this object activates the frost / heat protection operating mode.</p>
old: comfort, night, frost	<p>Frost/heat protection: 1 on this object activates the frost protection operating mode. During cooling mode, the heat protection operating mode is activated. The frost/heat protection operating mode has highest priority. Frost/heat protection mode remains active, until it is cleared again by a 0.</p>

Object 46: Current operating mode.

Sends the current HVAC operating mode.

The transmission behaviour can be defined on the **Settings** parameter page.

Value	HVAC operating mode
1	Comfort
2	Standby
3	Night
4	Frost protection/heat protection

Object 47: Operating mode as scene.

Teaching in and calling up scenes.

A scene only consists of the current operating mode preset.

Saving scenes: The current value of the object *operating mode preset* is saved together with the corresponding scene number.

Calling up scenes: The content of the object *operating mode preset* will be overwritten by the saved value, and the new operating mode will be accepted by the RTC.

See in the Appendix, *Operating mode as scene*

Object 48: Heating actuating value or heating/cooling actuating value.

Sends the current heating actuating value (0...100%) or heating or cooling if the *output of cooling actuating value* parameter has been set to *together with heating actuating value*. (parameter page **Cooling control**).

Type of control	Object format
Continuous	1 byte
2-point	1 bit

Object 49: Additional heating stage actuating value or PWM additional heating stage

Sends the actuating value for the additional heating stage depending on the configuration, as 1 bit PWM, or 1 byte percentage telegram.

This object is only available if the additional stage is used.

Object 50: Cooling actuating value

Sends the current actuating value or cooling switching command depending on the type of control selected on the **cooling control** parameter page.

The object is only available if the cooling function has been selected on the **Settings** parameter page (*control* = heating and cooling).

Object 51: Additional cooling stage actuating value or PWM additional cooling stage

Sends the actuating value for the additional cooling stage depending on the configuration, as 1 bit PWM, or 1 byte percentage telegram.

This object is only available if the additional stage is used.

Object 52: Send heating/cooling operation, or change over between heating and cooling

The object is available if the cooling function has been selected on the **Settings** parameter page (*control = heating and cooling*).

The function of the object depends on the *change over between heating and cooling* parameter on the **cooling control** parameter page.

Parameter: Change over between heating and cooling	Function
<i>Automatic</i>	Reports whether the room thermostat is currently operating in heating or cooling mode.
<i>Via object</i>	Receives the switching command for switching between heating and cooling mode.

The telegram format can be set on the **cooling control** parameter page:

Parameter: Format object heating/cooling	Telegram format
<i>DPT1.100</i>	Heating = 1, Cooling = 0
<i>Inverted</i>	Heating = 0, Cooling = 1

Object 53: Current setpoint

Sends the currently set temperature.

The transmission behaviour can be set on the **heating setpoints** parameter page.

Object 54: Control actual value

Sends the actual value actually used by the room temperature controller.

i The control actual value might, depending on the *source for the actual value*, deviate from the internally measured temperature (*object temperature value*).

Object 55: External actual value

Only available if *external actual value* has been selected as a source.

Receives the room temperature from another measurement point via the bus.

This object can be activated on the **actual value** parameter page.

Object 56: Send actual value failure

Only available if the actual value monitoring is activated (*Monitor actual value = yes*).

Sends a 1, as soon as one of the selected sources for the actual value provides an unusable value, or (if selected) if no new actual value telegram has been received by the *external actual value* object within the actual value monitoring time.

Unusable temperature values might occur if a temperature sensor is mechanically damaged, or if the electrical connection is interrupted or short-circuited.

i As long as at least one valid actual value remains available, this will be continued to be used for control. This is the case if the average value is determined out of 2 or 3 sources.

Object 57: Receive outdoor temperature

Only available if the *set point correction at high outdoor temperature* parameter has been set to *calculate internally and send*.

Receives the outdoor temperature for internal set point adjustment in cooling mode

Object 58: Receive dew point alarm

The object is available if the cooling function has been selected on the **Settings** parameter page (*control = heating and cooling*).

When receiving a 1, cooling will be stopped, so the temperature cannot drop down to the dew point.

4.3.5 Objects for the external inputs: Switch function

Object 60: Channel I1.1

First initial object of the channel (First telegram).

6 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x, 4 byte DPT 14.x.

Object 61: Channel I1.2

Second initial object of the channel (Second telegram).

6 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x, 4 byte DPT 14.x.

Object 62: Channel I1.3

Third initial object of the channel (Third telegram).

6 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x, 4 byte DPT 14.x.

Object 64: Channel I1 block = 1, or block = 0

The channel is blocked via this object.

The acting direction of the block object and behaviour when setting or cancelling the block can be set on the **Channel 1** parameter page.

Objects 65-79

Objects for channels I2-I4.

4.3.6 Objects for the external inputs: Button function

Object 60: Channel I1.1

First initial object of the channel (First telegram).

6 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x, 4 byte DPT 14.x.

Object 61: Channel I1.2

Second initial object of the channel (Second telegram).

6 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x, 4 byte DPT 14.x.

Object 62: Channel I1.3

Third initial object of the channel (Third telegram).

6 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x, 4 byte DPT 14.x.

Object 64: Channel I1 block = 1, or block = 0

The channel is blocked via this object.

The acting direction of the block object and behaviour when setting or cancelling the block can be set on the **Channel 1** parameter page.

Objects 65-79

Objects for channels I2-I4.

4.3.7 Objects for the external inputs: Dimming function

Object 60: Channel I1.1 switching

Switches the dimmer on and off.

Object 61: Channel I1.1 brighter, darker, brighter/darker

4-bit dim commands.

Object 62: Channel I1.1 – switching, priority, percentage value..

Initial object for the additional function with double-click.

6 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x,

4 byte DPT 14.x.

Object 64: Channel I1 block = 1, or block = 0

The channel is blocked via this object.

The acting direction of the block object and behaviour when setting or cancelling the block can be configured.

Objects 65-79

Objects for channels I2-I4.

4.3.8 Objects for the external inputs: Blinds function

Object 60: Channel I1 UP/DOWN, UP, DOWN

Sends operating command to the blind actuator.

Object 61: Channel I1 Step/Stop

Sends Step/Stop commands to the blind actuator.

Object 62: Channel I1.1 – switching, priority, percentage value., height % + slat %

Initial object for the additional function with double-click.

7 telegram formats can be set:

Switching ON/OFF, priority, send percentage value, send value, 2 byte DPT 9.x,

4 byte DPT 14.x, height % + slat %.

Object 64: Channel I1 block = 1, or block = 0


The channel is blocked via this object.

The acting direction of the block object and behaviour when setting or cancelling the block can be configured.

Objects 65-79

Objects for channels I2-I4.

4.3.9 Objects for the external inputs I3 and I4: Temperature sensor function

 The external inputs I3 and I4 can be used as analogue inputs for temperature measurement via remote sensor.

This function is activated on the **General** parameter page with the parameter *function of the external inputs I3 + I4*.

Object 70: Channel I3 temperature actual value

Sends the temperature measured by the external sensor at I3.

Object 75: Channel I4 temperature actual value

Sends the temperature measured by the external sensor at I4.

4.3.10 Diagnosis and alarm objects

Object 80: Firmware version

Sends firmware version information as DPT version (DPT217.001).
 Can be read out for diagnostic purposes via the ETS.
 See in the Appendix: Firmware version.

Object 81: Alarm info

Reports error or alarm as DPT_AlarmInfo (DPT219.001).

Object 83: Alarm error text

Diagnostic object: Sends a short alarm text in case of an error (14 characters) as DPT_String_ASCII (DPT16.000).

Alarm reason	Error text
CO ₂ sensor failure	CO ₂ Fault
Humidity/pressure sensor failure	Humidity Fault
Internal temperature sensor failure	Temp Fault
Rotary control failure ²³	Wheel Fault
Light sensor failure	ALS Fault
Sensor failure external analog input 3	I3 Temp Fault
Sensor failure external analog input 4	I4 Temp Fault
CO ₂ thresholds invalid	Thresholds CO ₂
Humidity thresholds invalid	Thresholds Hum

i If an alarm or an error occurs, this will be indicated by sending object *Alarm info*.
 Additionally, the object *Alarm error text* will be sent, which show the error code and a short error text.
 If several alarms are active, the object *Alarm error text* will be cyclically sent with the alarm information at an interval of 10 s.
 If all active alarms have been processed, the cyclical sending will be repeated after a pause of 30 s.
 If no alarms are active anymore, the object *Alarm error text* (blank string) will be sent once.

²³ Only Amun 716 S

4.3.11 Objects for measurement value calibration

Object 84: CO₂ offset - measurement value offset

Receives a value by which the current CO₂ measurement value is to be offset.

Format: DPT9.* 2 byte floating value. (max. ±1000 ppm).

Object 85: CO₂ offset – receive measurement value

Receives an absolute CO₂ measurement value, and adjusts the internally measured CO₂ value to the received CO₂ value.

Format: DPT9.008.

4.3.12 Objects for the comparator

Objects 86, 87, 88: input 1, input 2, input 3

Available if the respective parameter, *input 1, 2 or 3* is set to *input object (0-100%)*.

This allows the use of external actuating values for the determination of the comparison value.

Object 89: output

Sends the determined comparison value.

4.4 Parameter pages overview

The device consists of one general block and 5 main functional blocks.

Parameter page	Description
General functional block	
General	LED settings ²⁴ , activation of the temperature sensor inputs.
Measurement values	Settings for sending CO ₂ , humidity, temperature, air pressure, and comfort degree.
CO₂ sensor functional block	
CO₂ thresholds	Setting the 3 CO ₂ thresholds.
CO₂ threshold 1	Setting of response to exceeding or falling below the respective CO ₂ threshold.
CO₂ threshold 2	
CO₂ threshold 3	
Ventilating CO₂	Setting of ventilation speed depending on CO ₂ content
CO₂ scenes	Setting of scene numbers to be sent depending on CO ₂ content
Humidity sensor functional block	
Humidity thresholds	Setting of the 3 humidity thresholds
Humidity threshold 1	Setting of response to exceeding or falling below the respective humidity threshold
Humidity threshold 2	
Humidity threshold 3	
Ventilating humidity	Setting of ventilation speed depending on relative humidity
Humidity scenes	Setting of scene numbers to be sent depending on relative humidity
RTC functional block	
Setting	General settings for operation and temperature control
Actual value	Source for actual value measurement, actual value monitoring, etc.
Operating Mode	Operating mode after reset, presence sensor etc.
Heating control	Control parameters, installation type etc. for heating mode.
Heating setpoints	Base setpoint value, lowering, frost protection etc.
Additional stage heating	Type of actuating value, proportional band, transmission behaviour.
Cooling control	Control parameters, installation type etc. for cooling mode.
Cooling setpoints	Dead zone, standby, heat protection etc.
Set point adjustment	Setting maximum adjustment.
Additional stage cooling	Type of actuating value, proportional band, transmission behaviour.
Comparator functional block	
Comparator	Compares up to 3 actuating values and determines the minimum, maximum or mean value from them.
External inputs functional block	
Channel I1	Function of the input, debounce time, number of telegrams, block function, etc.
Channel I2	
Channel I3	Additionally at I3 and I4: Selection of the temperature sensor, temperature calibration, etc.
Channel I4	
Switch object 1	Object type, transmission behaviour, etc. can be set for each object individually.
Switch object 2	
Switch object 3	
Button object 1	Object type, transmission behaviour, etc. can be set for each object individually.
Button object 2	
Button object 3	
Dimming	Type of control


²⁴ Only Amun 716 S

Parameter page	Description
<i>Blinds</i>	Type of control
<i>Double-click</i>	Additional telegrams for <i>dimming</i> and <i>blinds</i>

4.5 General parameters

4.5.1 General

Designation	Values	Description
<i>Device type</i>	Amun 716 S <i>Set basic KNX Multi (Order No. 9070900)</i>	Standard device. Set basic KNX Multi for use with the Prema 360 P.
<i>Reduce brightness of the LEDs²⁵</i>	never <i>always</i> <i>only in night mode</i> <i>in the dark</i> <i>via bus</i>	The LEDs should: Shine every time at maximum brightness. Always shine at the specified brightness Shine at the specified brightness if the RTC is set to night mode. Shine at the specified brightness when it is dark in the room. Be able to be reduced or dimmed via bus telegrams.
<i>Object type²⁶</i>	via switch object <i>via percentage value</i>	Brightness reducible via switch telegram. The brightness of the LEDs can be set as desired via dimming telegrams.
<i>Value for reduced brightness²⁷</i>	<i>0-100%</i> Std. = 30%	LED brightness for the setting <i>always only in night mode, or via switch object.</i>
<i>Function of the external inputs I3+I4</i>	Binary input <i>Temperature sensor input</i>	I3 and I4 are normal binary inputs, as I1 and I2. I3 and I4 or used for temperature measurement, as well as for the internal RTC and for other bus sharing units. For this purpose, always one remote sensor is connected.


 The external inputs I3 and I4 can be used as analogue inputs for temperature measurement via remote sensor.

²⁵ Only Amun 716 S

²⁶ Only Amun 716 S

²⁷ Only Amun 716 S

4.5.2 Measurement values

Designation	Values	Description
CO₂		
Send CO ₂ content on change of	not due to a change 100 ppm 200 ppm 300 ppm 500 ppm	only send cyclically (if enabled) Send if the value has changed since the last transmission by the selected amount
Enable fresh air calibration	no yes	If the device is properly used, a calibration procedure is not necessary. See in the Appendix: <u>Fresh air calibration</u> <hr/>  With the setting yes, the calibration is not started, but admitted for the duration of 2 h after download.
Reference value for fresh air calibration	350-600 ppm	Standard value: 400 ppm See in the Appendix: <u>Fresh air calibration</u>
Send CO ₂ content cyclically	do not send cyclically every min, every 2 min every 3 min ... every 45 min every 60 min	How often should it be resent?
HUMIDITY		
Send humidity value on change of	not due to a change 2% 3% 5% 10%	only send cyclically (if enabled) Send if the value has changed by the selected amount since the last transmission.
Send humidity value cyclically	do not send cyclically every min, every 2 min every 3 min ... every 45 min every 60 min	How often should it be resent?
TEMPERATURE		

Designation	Values	Description
<i>Transmit temperature on change of (internal sensor)</i>	<p><i>not due to a change</i></p> <p>0.2 K 0.3 K 0.5 K 0.7 K 1 K 1.5 K 2 K</p>	<p>i Only valid for temperature measurement at the internal sensor.</p> <hr/> <p>Only send cyclically (if enabled)</p> <p>Send if the value has changed by the selected amount since the last transmission.</p>
<i>Send temperature cyclically</i>	<p>do not send cyclically</p> <p>every min, every 2 min every 3 min ... every 45 min every 60 min</p>	How often should it be resent?
<i>Temperature calibration</i>	<p>-64..+64 (x 0.1 K)</p>	<p>Correction value for temperature measurement if sent temperature deviates from the actual ambient temperature.</p> <p>Example: Temperature = 20°C sent temperature = 21°C Correction value = 10 (d.h. 10 x 0.1°C)</p>
AIR PRESSURE		
<i>Send air pressure on change of</i>	<p><i>not due to a change</i></p> <p>10 hPa (mbar) 20 hPa (mbar) 30 hPa (mbar) 40 hPa (mbar) 50 hPa (mbar)</p>	<p>only send cyclically (if enabled)</p> <p>Send if the value has changed by the selected amount since the last transmission.</p>
<i>Send air pressure cyclically</i>	<p>do not send cyclically</p> <p>every min, every 2 min every 3 min ... every 45 min every 60 min</p>	How often should it be resent?
COMFORT		

Designation	Values	Description
<i>Send degree of comfort cyclically</i>	<i>do not send cyclically</i> <i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent? (See in the Appendix: <i>Comfort</i>)

4.6 CO₂ sensor functional block

4.6.1 CO₂ thresholds

Designation	Values	Description
Number of CO ₂ thresholds	1, 2, 3	Define required thresholds.
Thresholds can be overwritten via object	no	The thresholds can only be set in the ETS.
	yes	The thresholds can be changed by bus telegrams any time.
Overwrite threshold after download	no	After download, the previously saved thresholds are preserved.
	yes	A download deletes and overwrites all saved thresholds.
Parameter mode for thresholds	Standard	Only the thresholds are entered. The hysteresis will be calculated automatically.
	<i>Expert mode</i>	Thresholds and hysteresis can be entered.
Standard mode		
CO ₂ threshold 1	600-799 ppm Std. = 700 ppm	Input of first threshold.
CO ₂ threshold 2	800-1399 ppm Std. = 1300 ppm	Input of second threshold.
CO ₂ threshold 3	1400-2500 ppm Std. = 1800 ppm	Input of third threshold.
Expert mode		
Hysteresis 1	100 ppm 200 ppm 300 ppm 500 ppm	The hysteresis prevents frequent switching after small changes in readings.
CO ₂ threshold 1	600-2500 ppm Std. = 600 ppm	Input of first threshold.
Hysteresis 2	100 ppm 200 ppm 300 ppm 500 ppm	The hysteresis prevents frequent switching after small changes in readings.
CO ₂ threshold 2	600-2500 ppm Std. = 1000 ppm	Input of second threshold.
Hysteresis 3	100 ppm 200 ppm 300 ppm 500 ppm	The hysteresis prevents frequent switching after small changes in readings.
CO ₂ threshold 3	600-2500 ppm Std. = 1500 ppm	Input of third threshold.



For the expert mode: The distance of two thresholds must be at least as big as the hysteresis in between.

If the LED at the device flashes red ²⁸, the thresholds are not correctly defined



For the thresholds at CO₂ and humidity, the hysteresis is negative on one side, that is.

Threshold exceeded = measurement value \geq threshold

fallen below threshold = measurement value \leq threshold – hysteresis

²⁸ Only Amun 716 S

4.6.2 Thresholds 1, 2, 3 CO₂

The parameters are identical for all 3 thresholds.
Threshold 1 is given as an example.

Designation	Values	Description	
<i>Telegram type for threshold 1 CO₂</i>	Switch command Priority Percentage value Value	Select telegram type for this threshold.	
<i>When exceeding the threshold</i>	<i>no telegram,</i> send following telegram once, <i>send cyclically</i>	Response if the measured value lies above the set threshold.	
<i>Telegram</i>	With object type = switching (1 bit)		
	ON	Send switch-on command	
	OFF	Send switch-off command	
	With object type = priority (2 bit)		
	no priority	Function	Value
		Priority not active (no control)	0 (00 _{bin})
		ON Priority ON (control: enable, on)	3 (11 _{bin})
	OFF Priority OFF (control: disable, off)	2 (10 _{bin})	
	With object type = value 0-255		
	0-255	Any value between 0 and 255 can be sent.	
With object type = percentage value (1 byte)			
0-100%	Any percentage value between 0 and 100 % can be sent.		
<i>When falling below threshold</i>	<i>no telegram,</i> send following telegram once, <i>send cyclically</i>	Response if the measured value lies above the set threshold.	
<i>Telegram</i>	With object type = switching (1 bit)		
	ON	Send switch-on command	
	OFF	Send switch-off command	
	With object type = priority (2 bit)		
	no priority	Function	Value
		Priority not active (no control)	0 (00 _{bin})
		ON Priority ON (control: enable, on)	3 (11 _{bin})
	OFF Priority OFF (control: disable, off)	2 (10 _{bin})	
	With object type = value 0-255		
	0-255	Any value between 0 and 255 can be sent.	
With object type = percentage value (1 byte)			
0-100%	Any percentage value between 0 and 100 % can be sent.		

Designation	Values	Description
<i>Response when setting the block</i>	ignore <i>do not send</i> <i>as with underrun threshold</i> <i>as with exceeded threshold</i>	The threshold cannot be blocked. The threshold will not send as long as the block object is set. Same reaction as set in the When threshold is not exceeded parameter (see above). Same reaction as set in the With exceeding the threshold parameter (see above).
<i>Response when cancelling the block</i>	<i>do not send</i> update	Not automatically resent when the block is cancelled The current threshold status is sent immediately after cancelling the block
<i>Block telegram</i>	Block with 1 (standard) <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable
<i>Send cyclically</i>	<i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> ... every 30 min <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

4.6.3 Ventilating CO2

Designation	Values	Description
<i>Fan control via</i>	fixed values	Up to 3 fixed fan speeds
	<i>PI controller</i>	Infinite PI fan control via CO ₂ setpoint.
Fixed values		
<i>Send given value:</i>	Input as percentage <i>Input as a number from 0 to 255</i>	Input format for fan control. This setting is not relevant for the actuator.
<i>If CO₂ below threshold 1</i>	0-100% or 0-255	Setting of desired Fan speeds depending on CO ₂ content.
<i>If CO₂ between threshold 1 and 2</i>	0-100% or 0-255 Std.: 35%	
<i>If CO₂ between threshold 2 and 3</i>	0-100% or 0-255 Std.: 70%	
<i>If CO₂ greater than threshold 3</i>	0-100% or 0-255	
PI controller		
<i>Setpoint overwritable via object</i>	no	The setpoint can only be set in the ETS.
	<i>yes</i>	The setpoint can be changed by bus telegrams any time. Permissible values: 400–1000 ppm.
<i>Overwrite setpoint after download</i>	no	After download, the previously saved value will be preserved.
	<i>yes</i>	A download deletes and overwrites the saved setpoint.
<i>Setpoint</i>	400-1000 ppm Std.: 500 ppm	CO ₂ setpoint for fan control
<i>Control parameters</i>	Standard	Standard application: P and I share preset. P = 150 ppm I = 15 min
	<i>User-defined</i>	Professional use: Configure P/PI controller yourself
<i>I share</i>	Pure P controller	Proportional control, no integrated time.
	<i>5 min</i> <i>10 min</i> 15 min <i>20 min</i> <i>25 min</i> <i>30 min</i>	The integrated time determines the response time of the control. It establishes the increase by which the actuating value from the controller is raised in addition to that from the P-term. The I share remains active for as long as there is a control deviation. The I share is added to the P share.

Designation	Values	Description
<i>P share</i>	100 ppm 150 ppm 200 ppm 250 ppm 300 ppm 350 ppm 400 ppm	Professional setting for adapting control response to the room. Small values cause large changes in actuating values, larger values cause finer actuating value adjustment.
<i>Minimum actuating value</i>	0%, 10%, 20% 30%, 40%, 50%	Lowest permissible actuating value. Can, for instance, be used to maintain a permanent air flow, even if the controller says 0 %.
<i>Response when falling below the minimum actuating value</i>	Output 0% <i>Output minimum actuating value</i>	If the actuating value is too low, always switch off the fan. The fan should not be at a complete standstill, but continue to run with the minimum actuating value, and thus ensure a permanent air exchange.
<i>Maximum actuating value</i>	50%, 60%, 70% 80%, 90%, 100%	Highest permissible actuating value.
<i>Send actuating value on change</i>	<i>No, only send cyclically</i> <i>by 2%, by 5%</i> <i>by 10%, by 20%</i>	After what percentage change in the actuating value is the new value to be transmitted?
<i>Response when setting the block</i>	Ignore block <i>do not send</i> <i>Send following value</i>	No block function, no further block parameters. Response to block telegram.
<i>Value if ventilation blocked</i>	0-100%	Fan speed in block mode.
<i>Response when unlocking</i>	<i>do not send</i> update	No response. send current control setpoint.
<i>Block telegram</i>	Block with 1 (standard) <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable
<i>Send fan value cyclically/send actuating value cyclically</i>	do not send cyclically <i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

4.6.4 CO₂ scenes

Designation	Values	Description
<i>Send specified scene</i>		
<i>If CO₂ below threshold 1</i>	Scene 1 ... Scene 64	Setting of scene numbers to be sent depending on CO ₂ content.
<i>If CO₂ between threshold 1 and 2</i>	Scene 1 Scene 2 ... Scene 64	
<i>If CO₂ between threshold 2 and 3</i>	Scene 1 ... Scene 3 ... Scene 64	
<i>If CO₂ greater than threshold 3</i>	Scene 1 ... Scene 4 ... Scene 64	
<i>Response when setting the block</i>	Ignore block <i>do not send</i> <i>Send following scene</i>	No block function, no further block parameters. Response to block telegram.
<i>If scenes CO₂ blocked</i>	Scene 1 ... Scene 64	Scene to be sent when the block object is set.
<i>Response when cancelling the block</i>	<i>do not send</i> update	no response. send current control setpoint.
<i>Block telegram</i>	Block with 1 (standard) <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable
<i>Send scene number cyclically</i>	do not send cyclically <i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

4.7 Humidity sensor functional block

4.7.1 Humidity thresholds

Designation	Values	Description
<i>Number of humidity thresholds</i>	1 2 3	Define required thresholds.
<i>Thresholds can be overwritten via object</i>	<i>no</i> <i>yes</i>	The thresholds can only be set in the ETS. The thresholds can be changed by bus telegrams any time
<i>Overwrite threshold after download</i>	<i>no</i> <i>yes</i>	After download, the previously saved thresholds are preserved. A download deletes and overwrites all saved thresholds.
<i>Monitor dew point</i>	<i>no</i> <i>yes</i>	No monitoring Show the Monitor dew point parameter page.
<i>Parameter mode for thresholds</i>	Standard <i>Expert mode</i>	Only the thresholds are entered. The hysteresis will be calculated automatically. Thresholds and hysteresis can be entered.
Standard mode		
<i>Humidity threshold 1</i>	10-39% Std.: 35%	Input of first threshold
<i>Humidity threshold 2</i>	40-59% Std.: 50%	Input of second threshold
<i>Humidity threshold 3</i>	60-90% Std.: 65%	Input of third threshold
Expert mode		
<i>Hysteresis 1</i>	1%, 2%, 3% 5%, 7%, 10%	The hysteresis prevents frequent switching after small changes in readings.
<i>Humidity threshold 1</i>	10-100% Std.: 45%	Input of first threshold
<i>Hysteresis 2</i>	1%, 2%, 3% 5%, 7%, 10%	The hysteresis prevents frequent switching after small changes in readings.
<i>Humidity threshold 2</i>	10-100% Std.: 55%	Input of second threshold
<i>Hysteresis 3</i>	1%, 2%, 3% 5%, 7%, 10%	The hysteresis prevents frequent switching after small changes in readings.
<i>Humidity threshold 3</i>	10-100% Std.: 70%	Input of third threshold

i For the thresholds at CO₂ and humidity, the hysteresis is negative on one side, that is.
 Threshold exceeded = measurement value ≥ threshold
 fallen below threshold = measurement value ≤ threshold – hysteresis

4.7.2 Humidity thresholds 1, 2, 3

The parameters are identical for all 3 thresholds.
Threshold 1 is given as an example.

Designation	Values	Description	
<i>Telegram type for humidity threshold 1</i>	Switch command Priority Percentage value Value	Select telegram type for this threshold.	
<i>When exceeding the threshold</i>	<i>no telegram,</i> send following telegram once, <i>send cyclically</i>	Response if the measured value lies above the set threshold.	
<i>Telegram</i>	With object type = switching (1 bit)		
	ON	Send switch-on command	
	OFF	Send switch-off command	
	With object type = priority (2 bit)		
	no priority	Function	Value
		Priority not active (no control)	0 (00 _{bin})
		ON	Priority ON Priority ON (control: enable, on)
	OFF	Priority OFF (control: disable, off)	2 (10 _{bin})
	With object type = value 0-255		
	0-255	Any value between 0 and 255 can be sent.	
With object type = percentage value (1 byte)			
0-100%	Any percentage value between 0 and 100 % can be sent.		
<i>When falling below threshold</i>	<i>no telegram,</i> send following telegram once, <i>send cyclically</i>	Response if the measured value lies above the set threshold.	
<i>Telegram</i>	With object type = switching (1 bit)		
	ON	Send switch-on command	
	OFF	Send switch-off command	
	With object type = priority (2 bit)		
	no priority	Function	Value
		Priority not active (no control)	0 (00 _{bin})
		ON	Priority ON Priority ON (control: enable, on)
	OFF	Priority OFF (control: disable, off)	2 (10 _{bin})
	With object type = value 0-255		
	0-255	Any value between 0 and 255 can be sent.	
With object type = percentage value (1 byte)			
0-100%	Any percentage value between 0 and 100 % can be sent.		

Designation	Values	Description
<i>Response when setting the block</i>	ignore <i>do not send</i> <i>as with underrun threshold</i> <i>as with exceeded threshold</i>	The threshold cannot be blocked. The threshold will not send as long as the block object is set. Same reaction as set in the When threshold is not exceeded parameter (see above). Same reaction as set in the With exceeding the threshold parameter (see above).
<i>Response when cancelling the block</i>	<i>do not send</i> update	Not automatically resent when the block is cancelled The current threshold status is sent immediately after cancelling the block
<i>Block telegram</i>	Block with 1 (standard) <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable
<i>Send cyclically</i>	<i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> ... every 30 min <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

4.7.3 Ventilating humidity

Designation	Values	Description
Send given value:	Input as percentage <i>Input as a number from 0 to 255</i>	Input format for fan control. This setting is not relevant for the actuator.
If humidity is below threshold 1	0-100% or 0-255	Setting of desired fan speeds depending on humidity.
If humidity is between thresholds 1 and 2	0-100% or 0-255 Std.: 35%	
If humidity is between thresholds 2 and 3	0-100% or 0-255 Std.: 70%	
If humidity is greater than threshold 3	0-100% or 0-255	
Response when setting the block	Ignore block <i>do not send</i> <i>Send following value</i>	No block function, no further block parameters. Response to block telegram.
Value if ventilation blocked	0-100%	Fan speed in block mode.
Response when unlocking	<i>do not send</i> update	no response. send current control setpoint.
Block telegram	Block with 1 (standard) <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable
Send fan value cyclically ²⁹ send actuating value cyclically ³⁰	do not send cyclically <i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> <i>...</i> <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

²⁹ With fan control via: fixed values

³⁰ With fan control via: PI controller

4.7.4 Humidity scenes

Designation	Values	Description
Send specified scene		
<i>If humidity is below threshold 1</i>	Scene 1 ... Scene 64	Setting of scene numbers to be sent depending on humidity.
<i>If humidity is between thresholds 1 and 2</i>	Scene 1 Scene 2 ... Scene 64	
<i>If humidity is between thresholds 2 and 3</i>	Scene 1 ... Scene 3 ... Scene 64	
<i>If humidity is greater than threshold 3</i>	Scene 1 ... Scene 4 ... Scene 64	
<i>Response when setting the block</i>	Ignore block <i>do not send</i> <i>Send following scene</i>	No block function, no further block parameters. Response to block telegram.
<i>If humidity scenes blocked</i>	Scene 1 ... Scene 64	Scene to be sent when the block object is set.
<i>Response when unlocking</i>	<i>do not send</i> update	no response. Send the current control setpoint.
<i>Block telegram</i>	Block with 1 (standard) <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable
<i>Send scene number cyclically</i>	do not send cyclically <i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

4.7.5 Dew point monitoring

In order to avoid the formation of condensate in cooling mode, a dew point alarm will be sent and cooling will be stopped, as soon as the humidity has reached a critical value. For this purpose, the *Send dew point alarm* object will be linked with the RTC object *Receive dew point alarm*.

Designation	Values	Description
<i>Threshold for dew point alarm</i>	60-90%	From which rel. humidity should the dew point alarm be triggered and sent?
<i>Send dew point alarm cyclically</i>	do not send cyclically every min, every 2 min every 3 min ... every 45 min every 60 min	How often should it be resent?

4.8 Room temperature controller RTC functional block

4.8.1 Setting

Designation	Values	Description
<i>Control</i>	<i>Heating control only</i> <i>Heating and cooling</i>	Heating mode only Additionally, a cooling system is to be controlled.
<i>Rotary control function</i> ³¹	<i>Base setpoint</i> <i>Manual offset</i> <i>Blocked</i> ³²	The base setpoint is exclusively set at the rotary control. The setpoint can be adjusted via the rotary control. The base setpoint is received via the <i>base setpoint</i> object. The rotary control has no function. The base setpoint is received via the <i>base setpoint</i> object.
<i>Manual offset works</i>	<i>in comfort, standby and night mode, in comfort and standby, only for comfort</i>	The set point offset: Is only considered in the selected mode and is ineffective in all operation modes.
<i>Manual offset at the end of night mode</i>	Do not change <i>Reset to 0 K</i>	Only available if the <i>Rotary control function</i> is set to <i>base setpoint</i> or <i>blocked</i> .
<i>Use floor temperature limitation (sensor at I4)</i>	No	no floor temperature limitation.

³¹ Only Amun 716 S

³² Set basic KNX Multi

Designation	Values	Description
	yes	<p>The floor temperature is measured by a sensor at external input I4.</p> <p>On the Heating setpoints parameter page the <i>Maximum floor temperature</i> parameter is shown.</p> <p>Functionality: If the <i>Maximum floor temperature</i> is reached, the heating actuating value is reduced to 0%. The hysteresis is 5 K.</p> <p>Prerequisite: The <i>Function of the external inputs I3+I4</i> parameter on the General parameter page has to be set to <i>Temperature sensor input</i>.</p> <p>See also Chapter: <u>External inputs I1-I4 functional block</u> → <u>Temperature sensor function (only I3 and I4)</u></p>
Set point correction at high outside temperature	<p>None</p> <p>Receive only</p> <p>Calculate internally and send</p>	<p>Function is deactivated</p> <p>The correction value is received by the bus, and the own setpoint is adjusted to the increase in outside temperature.</p> <p>The device calculates the correction value, sends it to other controllers and adjusts the own setpoint to the increase in outside temperature.</p> <p>See in the Appendix: <u>Set point correction</u></p>
Button function ³³	<p>Blocked</p> <p>Presence buttons</p> <p>Select operating modes</p>	<p>No function.</p> <p>The button starts the comfort operating mode.</p> <p>The button is used for selecting the operating mode.</p>

³³ Only Amun 716 S

4.8.2 Actual value

On this parameter page the source is selected which is used as the actual value for control. This can be the temperature sensor integrated in the device, an external sensor, or a combination of up to 3 sensors.

i The control actual value might, depending on the selection of the *source for the actual value*, deviate from the internally measured temperature (object *temperature value*).

Designation	Values	Description
<i>Source for actual value</i> ³⁴	<p>Internal sensor</p> <p><i>External actual value object</i></p> <p><i>Average value of internal + ext. actual value object</i></p> <p><i>Sensor at I3</i></p> <p><i>Average value of internal + I3</i></p> <p><i>Average value of I3 + ext. actual value obj.</i></p> <p><i>Average value of internal + I3 + ext. actual value obj.</i></p>	<p>Control actual value. The device measures and controls the room temperature via the internal sensor. (Control actual value = internally measured temperature).</p> <p>The room temperature is solely acquired via the bus.</p> <p>The device calculates the average value of the room temperature received from the bus and the internal measurement.</p> <p>External sensor at I3.</p> <p>Average value of the internal value and the value measured at I3.</p> <p>Use average value of I3 and bus.</p> <p>Use average value from 3 sources: I3 + internal + bus.</p>
<i>Send control actual value in the event of change of</i>	<p>not due to a change</p> <p><i>0.2 K, 0.3 K, 0.5 K, 0.7 K, 1 K, 1.5 K, 2 K</i></p>	<p>only cyclical sending possible.</p> <p>Minimum change for resending.</p>
<i>Send control actual value cyclically</i>	<p>no</p> <p><i>yes</i></p>	<p>Only send in the event of a change.</p> <p>Send in the event of a change and cyclically.</p>

³⁴ *Source for actual value*: The options with I3 are only available if the external inputs for temperature measurement are set, i.e. *Function of external inputs I3+I4 = temperature sensor input* (See General parameter page).

Designation	Values	Description
Monitor actual value	no yes	<p>No monitoring.</p> <p>All selected actual value sources are monitored. In case of an error, the object sends <i>actual value failure</i> error telegrams.</p> <hr/> <p>i As long as at least one valid actual value remains available, this will be continued to be used for control. This is the case if the average value is determined out of 2 or 3 sources.</p>
Monitoring time for external actual value	2 min, 3 min, 5 min, 10 min, 15 min, 20 min, 30 min, 45 min, 60 min	<p>Only for the <i>External actual value</i> object. If no value is received within the configured time and the object is the only selected source, the emergency program will be activated.</p> <hr/> <p>i As long as at least one valid actual value remains available, this will be continued to be used for control, and the emergency program remains inactive. This is the case if the average value is determined out of 2 or 3 sources.</p>

Designation	Values	Description
<i>Emergency program in case of actual value failure</i>	<p><i>with PI controller: 0%, with 2-point controller: Off</i></p> <p><i>with PI controller: 10%, with 2-point controller: On</i></p> <p><i>with PI controller: 20%, with 2-point controller: On</i></p> <p><i>with PI controller: 30%, with 2-point controller: On</i></p> <p><i>with PI controller: 50%, with 2-point controller: On</i></p>	<p>The emergency program will only be executed if the selected Source for actual value provides no valid value anymore. The heating/cooling will then be controlled with a fixed actuating value. This might be the case if only one <i>Source for actual value</i> is selected, e.g. only I3. In case of actual value failure, the value of the actuating value for the emergency program will, depending on the operating mode (heating/cooling), be output to the corresponding object.</p> <hr/> <p>i As long as at least one valid actual value remains available, this will be continued to be used for control, and the emergency program remains inactive. This is the case if the average value is determined out of 2 or 3 sources.</p> <hr/> <p>Example: <i>Average value of internal + I3.</i> If the sensor at I3 fails, the RTC controls with the remaining, i.e. with the internal sensor, in this case.</p>
<i>Actual value failure telegram</i>	<p><i>always cyclically</i></p> <p><i>only send cyclically in case of an error</i></p>	<p>The object sends the current status always cyclically and in the event of a change: Error = 1, no error = 0</p> <p>Only sends in case of an error, cyclically and in the event of a change: error = 1.</p>
<i>Send cyclically</i>	<p><i>every min every 2 min every 3 min ... every 30 min ... every 60 min</i></p>	<p>How often should it be resent?</p>

4.8.3 Operating Mode

Designation	Values	Description
<i>Operating mode after reset</i>	<i>Frost protection Temperature reduction at night Standby Comfort</i>	Operating mode after start-up or reprogramming
<i>Objects for determining the operating mode</i>	New: Operating mode, presence, window status <i>Old: comfort, night, frost</i>	The operating mode is changed depending on the window and presence contacts. Traditional setting without window and presence status. <hr/> i As long as the frost protection object is = 1, no other operating mode can be selected.
<i>Type of presence sensor</i>	<i>Presence detector</i>	Only for <i>objects for determining the operating mode = new..</i> The presence sensor activates comfort operating mode. Comfort operating mode as long as the presence object is set ³⁵ .

³⁵ Exception: If a window is opened (window object = 1), the room thermostat changes to frost protection mode.

Designation	Values	Description
	Presence button	<p>If a new operating mode is received on the operating mode preset object with the presence object set, it will be accepted and the presence object will be reset.</p> <p>Reception of the same operating mode prior to the presence status (e.g. via cycl. sending) is ignored.</p> <p>If the presence object is set during night / frost operation, it is reset after the configured comfort extension finishes ³⁶</p> <p>If the presence object is set during standby mode, the comfort operating mode is accepted without time restriction.</p>
<i>When increasing the temperature at the rotary control ³⁷</i>	<p>Do not set presence object</p> <p><i>Set presence object</i></p>	<p>Only if <i>type of presence sensor = presence button</i>.</p> <p>Only increase the temperature</p> <p>Presence object is set, the controller changes to comfort mode.</p>
<i>Time for comfort extension</i>	<p>30 min</p> <p>1 h</p> <p>1.5 h</p> <p>2 h</p> <p>2.5 h</p> <p>3 h</p> <p>3.5 h</p>	This determines how long the controller should remain in comfort mode after the presence button is pressed.
<i>Cyclical sending of current operating mode</i>	<p>do not send cyclically</p> <p>every 2 min</p> <p>every 3 min</p> <p>...</p> <p>every 45 min</p> <p>every 60 min</p>	How often should it be resent?

³⁶ Exception: If a window is opened (window object = 1), the room thermostat changes to frost protection mode.

³⁷ Only Amun 716 S

4.8.4 Heating control

Designation	Values	Description
Type of control	Continuous <i>2-point</i>	Infinite control (0.. 100 %). Switching control (On/Off). See in the Appendix: <u>Continuous and switching control</u> .
Number of heating stages	Only one heating stage <i>Main stage and additional stage</i>	Choice of 1- or 2-stage heating
Hysteresis of 2-point controller	<i>0.3 K</i> <i>0.5 K</i> <i>0.7 K</i> 1 K <i>1.5 K</i>	Interval between the tripping point (setpoint) and the turn back on point (setpoint – hysteresis). The hysteresis prevents a permanent switching on/off.
Recirculation of hysteresis after switching point	None <i>0.1 K/min</i> <i>0.2 K/min</i> <i>0.3 K/min</i>	The recirculation causes a gradual decrease in the hysteresis over time, and the control accuracy is increased. The hysteresis is equivalent to the programmed value for each switch-off and is gradually reduced by the recirculation process. The hysteresis can reduce to 0 K over prolonged periods of switch-off. When switching on the next time, it will be reset to the configured value.
Setting the control parameters	Via installation type <i>User-defined</i>	Standard application. The control parameters are preset. Professional use: Configure P/PI controller yourself.
Installation type	Radiator heating system <i>Underfloor heating</i>	PI controller with: Integrated time = 90 minutes Bandwidth = 2.5 K Integrated time = 30 h Bandwidth = 4 K
Proportional band of heating controller	<i>1 K, 1.5 K, 2 K, 2.5 K, 3 K, 3.5 K, 4 K, 4.5 K, 5 K, 5.5 K, 6 K, 6.5 K, 7 K, 7.5 K, 8 K, 8.5 K</i>	Professional setting for adapting control response to the room. Small values cause large changes in actuating values, larger values cause a finer actuating value adjustment. See in the Appendix: <u>Temperature control</u>

Designation	Values	Description
<i>Integrated time of heating controller</i>	<i>pure P controller</i> <i>30 min, 60 min</i> 90 min, 120 min <i>150 min, 180 min</i> <i>210 min</i> <i>4 h, 5 h, 10 h</i> <i>15 h, 20 h, 25 h</i> <i>30 h, 35 h</i>	Professional setting: See in the Appendix: <u><i>Response of the PI controller</i></u> This time can be adapted to suit particular circumstances. If the heating system is over-dimensioned and therefore too fast, shorter values should be used. On the other side, longer integration times are beneficial for a slightly undersized heating (slow).
<i>Send heating actuating value cyclically</i>	<i>At change by 1%</i> <i>At change by 2%</i> <i>At change by 3%</i> At change by 5% <i>At change by 7%</i> <i>At change by 10%</i> <i>At change by 15%</i>	After what percentage change in the actuating value is the new value to be transmitted. Small values increase control accuracy but also the bus load.
<i>Send heating actuating value cyclically</i>	do not send cyclically <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

4.8.5 Heating setpoints

Designation	Values	Description
Base setpoint after loading the application	18 °C, 19 °C, 20 °C 21 °C, 22 °C, 23 °C 24 °C, 25 °C	Output setpoint for temperature control.
Minimum valid base setpoint	5-20°C in 1 degree increments Std.: 10 °C	If the object receives a base setpoint which is lower than the minimum valid base setpoint, the base setpoint will be increased to the value set here.
Maximum valid base setpoint	17..32 °C in 1 degree increments	If the object receives a base setpoint which is higher than the maximum valid base setpoint, the base setpoint will be set to the value set here.
Maximum valid set point offset	+/- 1 K +/- 2 K +/- 3 K +/- 4 K +/- 5 K	Limits the possible setting range for the setpoint offset function. Is valid for the <i>Man. set point offset</i> as well as for the rotary control.
Reduction in standby mode (when heating)	0 K, 0.5 K, 1 K, 1.5 K, 2 K , 2.5 K, 3 K, 3.5 K, 4 K, 4.5 K, 5 K	Example: With a base setpoint of 21 °C in heating mode and a reduction of 2K, the device controls with a setpoint of 21 – 2 = 19 °C.
Reduction in night mode (during heating)	3 K, 4 K, 5 K 6 K, 7 K, 8 K	By what value should the temperature be reduced in night mode?
Setpoint for frost protection mode (during heating)	3-10 °C Std.: 6 °C	Preset temperature for frost protection mode in heating mode (Heat protection applies in cooling mode).
Current setpoint in comfort mode	Actual value (heating <> cooling)	Feedback of current setpoint value via the bus: The setpoint actually being used for control is always to be sent (= current setpoint). Example with Base setpoint 21 °C and dead zone 2 K: During heating, 21 °C is transmitted and during cooling, base setpoint + dead zone is transmitted (21 °C + 2 K = 23 °C)

Designation	Values	Description
	<i>Average value betw. heating and cooling</i>	Same value in comfort mode during both heating and cooling mode, i.e.: base setpoint + half dead zone will be sent, so users of the room will not be irritated. Example with Base setpoint 21°C and dead zone of 2 K: Average value = 21 °C+1 K = 22 °C, but 21 °C or 23 °C are used for control
<i>Maximum floor temperature</i> ³⁸	24 °C, 26 °C, 28 °C 30 °C , 32 °C, 34 °C 36 °C, 38 °C, 40 °C	Maximum permissible floor temperature.
<i>Cyclical sending of current setpoint</i>	do not send cyclically every 2 min every 3 min ... every 45 min every 60 min	How often should it be resent?

³⁸ *Maximum floor temperature*: This parameter is only available if the external inputs for temperature measurement are set, i.e. *Function of external inputs I3+I4 = temperature sensor input* (see **General** parameter page) and the parameter *Use floor temperature limitation (sensor at I4)* is set to yes.

4.8.6 Additional stage heating

Temperature control is done via a proportional controller.

Designation	Values	Description
<i>Output of the actuating value</i>	Percent <i>PWM</i>	Control is done via a proportional controller. Continuous actuating value 0-100 % Pulse-width modulated switching actuating value.
<i>Difference between main stage and additional stage</i>	0 K, 0.5 K, 1 K 1.5 K, 2 K , 2.5 K 3 K, 3.5 K, 4 K	Defines the negative distance between the current setpoint and the setpoint of the additional stage. Example with basic setpoint of 21 °C and difference of 1 K: The main stage controls with the base setpoint and the addition stage controls with base setpoint value – 1K = 20°C
<i>Proportional band</i>	1 K, 1.5 K, 2 K, 2.5 K 3 K, 3.5 K, 4 K , 4.5 K 5 K, 5.5 K, 6 K, 6.5 K 7 K, 7.5 K, 8 K, 8.5 K	With continuous additional stage, Professional setting for adapting control response to the room. Large values cause finer changes to the control variables with the same control deviation and more precise control than smaller values.
<i>PWM period</i>	3-30 min Std.: 5 min	An actuation cycle consists of a switching-on and a switching-off process and forms a PWM period. Example: Actuating value = 20 %, PWM time = 10 min: In an actuating cycle of 10 min, 2 min switched on and 8 min switched off (i.e. 20 % on/80 % off).
<i>Transmission of actuating value</i>	At change by 1% At change by 2% At change by 3% At change by 5% At change by 7% At change by 10% At change by 15%	After what percentage change in the actuating value is the new value to be transmitted. Small values increase control accuracy but also the bus load.

Designation	Values	Description
<i>Send cyclically</i>	<i>do not send cyclically</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

4.8.7 Cooling control

Designation	Values	Description
Type of control	Continuous <i>2-point</i>	Infinite control (0.. 100 %). Switching control (On/Off). See in the Appendix: <u>Continuous and switching control</u> .
Number of cooling stages	Only one cooling stage <i>Main stage and additional stage</i>	Choice of 1- or 2-stage cooling
Hysteresis of 2-point controller	<i>0.3 K, 0.5 K, 0.7 K</i> 1 K, 1.5 K	Interval between the tripping point (setpoint) and the turn back on point (setpoint – hysteresis). The hysteresis prevents a permanent switching on/off.
Recirculation of hysteresis after switching point	None <i>0.1 K/min</i> <i>0.2 K/min</i> <i>0.3 K/min</i>	The recirculation causes a gradual decrease in the hysteresis over time, and the control accuracy is increased. The hysteresis is equivalent to the programmed value for each switch-off and is gradually reduced by the recirculation process. The hysteresis can reduce to 0 K over prolonged periods of switch-off. When switching on the next time, it will be reset to the configured value.
Setting the control parameters	Via installation type <i>User-defined</i>	Standard application. The control parameters are preset. Professional use: Configure P/PI controller yourself.
Installation type	Cooling surface <i>Fan coil unit</i>	PI controller with: Integrated time = 240 minutes Bandwidth = 5 K Integrated time = 180 min. Bandwidth = 4 K
Proportional band of the cooling control	<i>1 K, 1.5 K, 2 K, 2.5 K</i> <i>3 K, 3.5 K, 4 K, 4.5 K</i> 5 K, 5.5 K, 6 K, 6.5 K <i>7 K, 7.5 K, 8 K, 8.5 K</i>	Professional setting for adapting control response to the room. Small values cause large changes in actuating values, larger values cause a finer actuating value adjustment. See in the Appendix: <u>Temperature control</u>

Designation	Values	Description
<i>Integrated time of the cooling control</i>	30 min, 60 min, 90 min , 120 min 150 min, 180 min 210 min 4 h, 5 h, 10 h 15 h, 20 h, 25 h 30 h, 35 h	Professional setting: See in the Appendix: <i>Response of the PI controller</i> This time can be adapted to suit particular circumstances. If the cooling system is over-dimensioned and therefore too fast, shorter values should be used. On the other side, longer integration times are beneficial for a slightly undersized cooling (slow).
<i>Send cooling actuating value</i>	at change by 1% at change by 2% at change by 3% at change by 5% at change by 7% at change by 10% at change by 15%	After what percentage change in the actuating value is the new value to be transmitted. Small values increase control accuracy but also the bus load.
<i>Switching between heating and cooling</i>	Automatic <i>Via object</i>	The controller automatically switches to cooling mode when the actual temperature is above the setpoint. The cooling mode can only be activated on the bus via object <i>Change over between heating and cooling</i> . Cooling mode remains off for as long as this object is not set.
<i>Format object heating/cooling</i>	DPT1.100 (Heating=1/Cooling=0) <i>Inverted</i> <i>(Heating=0/Cooling=1)</i>	Standard format. Compatible with RAM 713 S, VARIA etc.
<i>Output of the cooling actuating value</i>	On separate obj. (for 4-pipe systems) <i>In common with actuating val. heating</i> <i>(for 2-pipe systems)</i>	For 4-pipe systems: The actuating values are sent to 2 separate objects: Obj. <i>heating actuating value</i> Obj. <i>cooling actuating value</i> . For 2-pipe systems: The actuating value is always sent to the same object (obj. <i>actuating value heating/cooling</i>), independent of whether heating or cooling mode is active.
<i>Send cooling actuating value cyclically</i>	do not send cyclically every 2 min every 3 min ... every 45 min every 60 min	How often should it be resent?

4.8.8 Cooling setpoints

Designation	Values	Description
<i>Dead zone between heating and cooling</i>	0 K ³⁹ , 0.5 K ⁴⁰ , 1 K, 1.5 K, 2 K, 2.5 K, 3 K, 3.5 K 4 K, 4.5 K, 5 K, 5.5 K, 6 K + hysteresis heating ⁴¹ + hysteresis cooling ⁴²	Specifies the buffer zone between setpoints for heating and cooling mode. The dead zone is expanded through hysteresis in switching (2 point) control. See in the Appendix: <i>Dead zone</i>
<i>Increase in standby mode (during cooling)</i>	0 K, 0.5 K, 1 K 1.5 K, 2 K, 2.5 K 3 K, 3.5 K, 4 K 4.5 K, 5 K	The standby temperature is increased in cooling mode.
<i>Increase in night mode (during cooling)</i>	3 K, 4 K, 5 K 6 K, 7 K, 8 K	The in cooling mode, the temperature is increased in night mode.
<i>Setpoint for heat protection mode (during cooling)</i>	0 = 42 °C, i.e. no real heat protection 29 °C, 30 °C, 31 °C 32 °C, 33 °C, 34 °C 35 °C	Heat protection represents the maximum permitted temperature for the controlled room. It performs the same function during cooling as the frost protection mode during heating, e.g. saves energy while prohibiting non-permitted temperatures.

³⁹ 0 K and 0.5 K: Only in 2-pipe system.

⁴⁰ 0 K and 0.5 K: Only in 2-pipe system.

⁴¹ Only with type of control heating = 2-point.

⁴² Only with type of control cooling = 2-point.

Designation	Values	Description
	Until heat protection temp. reached ⁴⁴ +3 K +5 K +7 K	The setpoint is only increased up to the configured heat protection temperature. The setpoint increase ends as soon as the adjustment has achieved the set value.
<i>Send set point adjustment</i>	do not send cyclically <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?

⁴⁴ In case of set point correction at high temperatures = only receive.

4.8.10 Additional stage cooling

Control is done via a proportional controller.

Designation	Values	Description
<i>Type of actuating value</i>	Percent <i>PWM</i>	Control is done via a proportional controller. Continuous actuating value 0-100 % Pulse-width modulated switching actuating value.
<i>Difference between main stage and additional stage</i>	0 K, 0.5 K, 1 K 1.5 K, 2 K , 2.5 K 3 K, 3.5 K, 4 K	Defines the negative distance between the current setpoint and the setpoint of the additional stage. Example with basic setpoint of 21 °C and difference of 1 K: The main stage controls with the base setpoint and the addition stage controls with base setpoint value – 1K = 20°C
<i>Proportional band</i>	1 K, 1.5 K, 2 K, 2.5 K 3 K, 3.5 K, 4 K , 4.5 K 5 K, 5.5 K, 6 K, 6.5 K 7 K, 7.5 K, 8 K, 8.5 K	With continuous additional stage, Professional setting for adapting control response to the room. Large values cause finer changes to the control variables with the same control deviation and more precise control than smaller values.
<i>PWM period</i>	3-30 min Std.: 5 min	An actuation cycle consists of a switching-on and a switching-off process and forms a PWM period. Example: Actuating value = 20 %, PWM time = 10 min: In an actuating cycle of 10 min, 2 min switched on and 8 min switched off (i.e. 20 % on/80 % off).
<i>Transmission of actuating value</i>	At change by 1% At change by 2% At change by 3% At change by 5% At change by 7% At change by 10% At change by 15%	After what percentage change in the actuating value is the new value to be transmitted. Small values increase control accuracy but also the bus load.
<i>Send cyclically</i>	do not send cyclically every 2 min every 3 min ... every 45 min every 60 min	How often should it be resent?

4.9 External inputs I1-I4 functional block

4.9.1 Switch function


Designation	Values	Description
<i>Activate channel</i>	<i>no</i> <i>yes</i>	Use input?
<i>Channel function</i>	Switch.. <i>Push button..</i> <i>Dimming..</i> <i>Blinds..</i>	Sends, depending on whether the input is 0 or 1.
<i>Debounce time</i>	<i>30 ms, 50 ms, 80 ms</i> <i>100 ms, 200 ms,</i> <i>1 s, 5 s, 10 s</i>	In order to avoid a disruptive switching due to debouncing of the contact connected to the input, the new status of the input is only accepted after a delay time. Larger values ($\geq 1s$) can be used as a switch-on delay
<i>Send cyclically</i>	<i>every min</i> <i>every 2 min</i> <i>every 3 min</i> <i>...</i> every 30 min <i>every 45 min</i> <i>every 60 min</i>	Common cycle time for all 3 initial objects of the channel.
<i>Number of telegrams</i>	one telegram <i>two telegrams</i> <i>three telegrams</i>	Each channel has 3 initial objects and can thus send up to 3 different telegrams.
<i>Activate block function</i>	no <i>yes</i>	No block function. Show block function parameter page.
<i>Block telegram</i>	Block with 1 (standard) <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable

4.9.1.1 Switch object parameter pages 1, 2, 3

Each of the 3 objects can be configured individually on its own parameter page.

Designation	Values	Description								
<i>Object type</i>	Switching (1 bit) Priority (2 bit) Value 0-255 Percentage value (1 byte) 2 byte floating-point number DPT 9.x 4 byte floating-point number DPT 14.x	Telegram type for this object.								
<i>Send if input = 1</i>	<i>no</i> yes	Send if voltage is present at the input?								
<i>Telegram</i>	With object type = switching 1 bit									
	ON OFF BY	Send switch-on command Send switch-off command Invert current state (ON-OFF-ON etc.)								
	With object type = priority 2 bit									
	inactive ON OFF	<table border="1"> <thead> <tr> <th>Function</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Priority not active (no control)</td> <td>0 (00_{bin})</td> </tr> <tr> <td>Priority ON Priority ON (control: enable, on)</td> <td>3 (11_{bin})</td> </tr> <tr> <td>Priority OFF (control: disable, off)</td> <td>2 (10_{bin})</td> </tr> </tbody> </table>	Function	Value	Priority not active (no control)	0 (00 _{bin})	Priority ON Priority ON (control: enable, on)	3 (11 _{bin})	Priority OFF (control: disable, off)	2 (10 _{bin})
Function	Value									
Priority not active (no control)	0 (00 _{bin})									
Priority ON Priority ON (control: enable, on)	3 (11 _{bin})									
Priority OFF (control: disable, off)	2 (10 _{bin})									
	With object type = value 0-255									
	0-255	Any value between 0 and 255 can be sent.								
	With object type = percentage value									
	0-100%	Any percentage value between 0 and 100 % can be sent.								
	With object type = 2 byte floating-point number									
	-670760...670760 Std.: 0	Any value between -670760 and 670760 can be sent.								
	With object type = 4 byte floating-point number									
	-1E+38.. 1E+38 Std.: 0	Any value between -1E+38 and 1E+38 can be sent. Input format: The ETS only allows the input as a decimal without power. Example: 15234825.123456								
<i>Send if input = 0</i>	<i>no</i> yes	Send if voltage is present at the input?								
<i>Telegram</i>	See above: Same object type as <i>Send if input = 1</i>									

Designation	Values	Description
<i>Send cyclically</i>	no <i>yes, always</i> <i>only if input = 1</i> <i>only if input = 0</i>	When should be sent cyclically? The cycle time is set on the main parameter page of the channel.
<i>Response after restoration of the bus supply</i>	none <i>update (immediately)</i> <i>update (after 5 s)</i> <i>update (after 10 s)</i> <i>update (after 15 s)</i>	Do not send. Send update telegram immediately or with delay.
<i>Response when setting the block</i>	Ignore block <i>no response</i> <i>as with input = 1</i> <i>as with input = 0</i>	The block function is ineffective with this telegram. Do not respond when setting the block. Respond as with rising edge. Respond as with falling edge.
<i>Response when cancelling the block</i>	no response <i>update</i>	Do not respond when the block is cancelled. Send update telegram.

 If a channel is blocked, no telegrams will be sent cyclically.

4.9.2 Switch function I1, I2, I3, I4

Designation	Values	Description
<i>Activate channel</i>	<i>no</i> <i>yes</i>	Use input?
<i>Channel function</i>	<i>Switch..</i> <i>Push button..</i> <i>Dimming..</i> <i>Blinds..</i>	A push button is connected to the input.
<i>Debounce time</i>	<i>30 ms, 50 ms, 80 ms</i> <i>100 ms, 200 ms,</i> <i>1 s, 5 s, 10 s</i>	In order to avoid a disruptive switching due to debouncing of the contact connected to the input, the new status of the input is only accepted after a delay time. Larger values ($\geq 1s$) can be used as a switch-on delay.
<i>Connected push button</i>	<i>NO contact</i> <i>Opening contact</i>	Set the Type of connected contact.
<i>Long button push starting at</i>	<i>300 ms, 400 ms</i> <i>500 ms, 600 ms</i> <i>700 ms, 800 ms</i> <i>900 ms, 1 s</i>	Serves to clearly differentiate between long and short button push. If the push button is pressed for at least as long as the set time, then a long button push will be registered.
<i>Time for double-click</i>	<i>300 ms, 400 ms</i> <i>500 ms, 600 ms</i> <i>700 ms, 800 ms</i> <i>900 ms, 1 s</i>	Serves to differentiate between a double-click and 2 single clicks. Time period in which the second click must begin, in order to recognise a double-click.
<i>Send cyclically</i>	<i>every min</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 30 min</i> <i>every 45 min</i> <i>every 60 min</i>	Common cycle time for all 3 initial objects of the channel.
<i>Number of telegrams</i>	<i>one telegram</i> <i>two telegrams</i> <i>three telegrams</i>	Each channel has 3 initial objects and can thus send up to 3 different telegrams.
<i>Activate block function</i>	<i>no</i> <i>yes</i>	No block function. Show block function parameter page.
<i>Block telegram</i>	<i>Block with 1 (standard)</i> <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable

4.9.2.1 Parameter pages button object 1, 2, 3

Each of the 3 objects can be configured individually on its own parameter page.

Designation	Values	Description								
<i>Object type</i>	Switching (1 bit) Priority (2 bit) Value 0-255 Percentage value (1 byte) 2 byte floating-point number DPT 9.x 4 byte floating-point number DPT 14.x	Telegram type for this object.								
<i>Send after short operation</i>	do not send Send telegram	Respond to short button push?								
<i>Telegram</i>	<i>With object type = switching 1 bit</i>									
	ON OFF BY	Send switch-on command Send switch-off command Invert current state (ON-OFF-ON etc.)								
	<i>With object type = priority 2 bit</i>									
	<i>inactive</i>	<table border="1"> <thead> <tr> <th>Function</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Priority not active (no control)</td> <td>0 (00_{bin})</td> </tr> <tr> <td>Priority ON Priority ON (control: enable, on)</td> <td>3 (11_{bin})</td> </tr> <tr> <td>Priority OFF (control: disable, off)</td> <td>2 (10_{bin})</td> </tr> </tbody> </table>	Function	Value	Priority not active (no control)	0 (00 _{bin})	Priority ON Priority ON (control: enable, on)	3 (11 _{bin})	Priority OFF (control: disable, off)	2 (10 _{bin})
Function	Value									
Priority not active (no control)	0 (00 _{bin})									
Priority ON Priority ON (control: enable, on)	3 (11 _{bin})									
Priority OFF (control: disable, off)	2 (10 _{bin})									
	<i>ON</i>									
	<i>OFF</i>									
	<i>With object type = value 0-255</i>									
	<i>0-255</i>	Any value between 0 and 255 can be sent.								
	<i>With object type = percentage value 1 byte</i>									
	<i>0-100%</i>	Any percentage value between 0 and 100 % can be sent.								
	<i>With object type = 2 byte floating-point number</i>									
	<i>-670760...670760</i> Std.: 0	Any value between -670760 and 670760 can be sent.								
	<i>With object type = 4 byte floating-point number</i>									
	<i>-1E+38.. 1E+38</i> Std.: 0	Any value between -1E+38 and 1E+38 can be sent. Input format: The ETS only allows the input as a decimal without power. Example: 15234825.123456								
<i>Send after long operation</i>	do not send Send telegram	Respond to long button push?								
<i>Telegram</i>	See above: Same object type as with short operation.									
<i>Send after double-click</i>	do not send Send telegram	Respond to double-click?								

Designation	Values	Description
<i>Telegram</i>	See above: Same object type as with short operation.	
<i>Send cyclically</i>	no yes	The cycle time is set on the main parameter page of the channel.
<i>Response after restoration of the bus supply</i>	none <i>As with short (immediately)</i> <i>As with short (after 5 s)</i> <i>As with short (after 10 s)</i> <i>As with short (after 15 s)</i> <i>As with long (immediately)</i> <i>As with long (after 5 s)</i> <i>As with long (after 10 s)</i> <i>As with long (after 15 s)</i> <i>As with double-click (immediately)</i> <i>As with double-click (after 5 s)</i> <i>As with double-click (after 10 s)</i> <i>As with double-click (after 15 s)</i>	Do not send. Send update telegram immediately or with delay. The value to be sent depends on the value configured for long, short button push, or double-click.
<i>Response when setting the block</i>	Ignore block <i>no response</i> <i>as with short</i> <i>as with long</i> <i>as with double-click</i>	The block function is ineffective with this telegram. Do not respond when setting the block. Respond as with a short button push. Respond as with a long button push. Respond as with a double-click.
<i>Response when cancelling the block</i>	no response <i>as with short</i> <i>as with long</i> <i>as with double-click</i>	Do not respond when the block is cancelled. Respond as with a short button push. Respond as with a long button push. Respond as with a double-click.

Note: If a channel is blocked, no telegrams will be sent cyclically.

4.9.3 Dimming function I1, I2, I3, I4

Designation	Values	Description
<i>Activate channel</i>	<i>no</i> <i>yes</i>	Use input?
<i>Channel function</i>	<i>Switch..</i> <i>Push button..</i> <i>Dimming..</i> <i>Blinds..</i>	The input controls a dimming actuator,
<i>Debounce time</i>	<i>30 ms, 50 ms, 80 ms</i> <i>100 ms, 200 ms,</i> <i>1 s, 5 s, 10 s</i>	In order to avoid a disruptive switching due to debouncing of the contact connected to the input, the new status of the input is only accepted after a delay time. Larger values ($\geq 1s$) can be used as a switch-on delay
<i>Long button push starting at</i>	<i>300 ms, 400 ms</i> <i>500 ms, 600 ms</i> <i>700 ms, 800 ms</i> <i>900 ms, 1 s</i>	Serves to clearly differentiate between long and short button push. If the push button is pressed for at least as long as the set time, then a long button push will be registered.
<i>Double-click additional function</i>	<i>no</i> <i>yes</i>	No double-click function The double-click parameter page is shown.
<i>Time for double-click</i>	<i>300 ms, 400 ms</i> <i>500 ms, 600 ms</i> <i>700 ms, 800 ms</i> <i>900 ms, 1 s</i>	Serves to differentiate between a double-click and 2 single clicks. Time period in which the second click must begin, in order to recognise a double-click.
<i>Activate block function</i>	<i>no</i> <i>yes</i>	No block function. Show block function parameter page.
<i>Block telegram</i>	<i>Block with 1 (standard)</i> <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable

4.9.3.1 Dimming parameter page

Designation	Values	Description
<i>Response to "long" / "short"</i>	<p>One button operation</p> <p><i>brighter/ON</i></p> <p><i>brighter/BY</i></p> <p><i>darker/OFF</i></p> <p><i>darker/BY</i></p>	<p>The input distinguishes between a long and a short button push, and can thus carry out 2 functions.</p> <p>The dimmer is operated with a single push button. Short button push = ON/OFF Long button push = brighter/darker release = stop</p> <p>With the other variants, the dimmer is operated using 2 buttons (rocker).</p> <p>Short button push = ON Long button push = brighter Release = stop</p> <p>Short button push = ON/OFF Long button push = brighter Release = stop</p> <p>Short button push = OFF Long button push = darker Release = stop</p> <p>Short button push = ON/OFF Long button push = darker Release = stop</p>
<i>Increment for dimming</i>	<p>100%</p> <p>50%</p> <p>25%</p> <p>12.5%</p> <p>6%</p> <p>3%</p> <p>1.5%</p>	<p>With a long button push, the dimming value is:</p> <p>Increased (or decreased) until the button is released.</p> <p>Increased by the selected value (or reduced)</p>
<i>Response in case of bus and mains restoration</i>	<p>none</p> <p><i>ON</i></p> <p><i>OFF</i></p>	<p>Do not react.</p> <p>Switch on dimmer</p> <p>Switch off dimmer</p>

Designation	Values	Description
	after 5 s ON after 10 s ON after 15 s ON after 5 s OFF after 10 s OFF after 15 s OFF	Switch on dimmer with delay Switch off dimmer with delay
<i>Response when setting the block</i>	Ignore block no response ON OFF	The block function is ineffective with this telegram. Do not respond when setting the block. Switch on dimmer Switch off dimmer
<i>Response when cancelling the block</i>	no response ON OFF	Do not respond when the block is cancelled. Switch on dimmer Switch off dimmer

4.9.3.2 Double-click parameter page

Designation	Values	Description								
<i>Object type</i>	Switching (1 bit) Priority (2 bit) Value 0-255 Percentage value (1 byte) 2 byte floating-point number DPT 9.x 4 byte floating-point number DPT 14.x	Telegram type for this object.								
<i>Telegram</i>	<i>With object type = switching 1 bit</i>									
	ON OFF BY	Send switch-on command Send switch-off command Invert current state (ON-OFF-ON etc.)								
	<i>With object type = priority 2 bit</i>									
	inactive	<table border="1"> <thead> <tr> <th>Function</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Priority not active (no control)</td> <td>0 (00_{bin})</td> </tr> <tr> <td>Priority ON Priority ON (control: enable, on)</td> <td>3 (11_{bin})</td> </tr> <tr> <td>Priority OFF (control: disable, off)</td> <td>2 (10_{bin})</td> </tr> </tbody> </table>	Function	Value	Priority not active (no control)	0 (00 _{bin})	Priority ON Priority ON (control: enable, on)	3 (11 _{bin})	Priority OFF (control: disable, off)	2 (10 _{bin})
	Function	Value								
	Priority not active (no control)	0 (00 _{bin})								
	Priority ON Priority ON (control: enable, on)	3 (11 _{bin})								
	Priority OFF (control: disable, off)	2 (10 _{bin})								
	ON									
	OFF									
	<i>With object type = value 0-255</i>									
	0-255	Any value between 0 and 255 can be sent.								
<i>With object type = percentage value 1 byte</i>										
0-100%	Any percentage value between 0 and 100 % can be sent.									
<i>With object type = 2 byte floating-point number</i>										
-670760...670760 Std.: 0	Any value between -670760 and 670760 can be sent.									
<i>With object type = 4 byte floating-point number</i>										
-1E+38.. 1E+38 Std.: 0	Any value between -1E+38 and 1E+38 can be sent. Input format: The ETS only allows the input as a decimal without power. Example: 15234825.123456									
<i>Send cyclically</i>	do not send cyclically every 1 min every 2 min every 3 min ... every 45 min every 60 min	How often should it be sent again?								
<i>Response after restoration of the bus</i>	none	Do not send.								

Designation	Values	Description
<i>supply</i>	<i>As with double-click (immediately)</i> <i>As with double-click (after 5 s)</i> <i>As with double-click (after 10 s)</i> <i>As with double-click (after 15 s)</i>	Send update telegram immediately or with delay. The value to be sent depends on the value configured for double-click.
<i>Response when setting the block</i>	Ignore block <i>no response</i> <i>as with double-click</i>	The block function is ineffective with this telegram. Do not respond when setting the block. Respond as with a double-click.
<i>Response when cancelling the block</i>	no response <i>as with double-click</i>	Do not respond when the block is cancelled. Respond as with a double-click.

4.9.4 Blinds function I1, I2, I3, I4

Designation	Values	Description
Activate channel	<i>no</i> <i>yes</i>	Use input?
Channel function	<i>Switch..</i> <i>Push button..</i> <i>Dimming..</i> <i>Blinds..</i>	The input controls a blinds actuator.
Debounce time	<i>30 ms, 50 ms, 80 ms</i> <i>100 ms, 200 ms,</i> <i>1 s, 5 s, 10 s</i>	In order to avoid a disruptive switching due to debouncing of the contact connected to the input, the new status of the input is only accepted after a delay time. Larger values ($\geq 1s$) can be used as a switch-on delay
Long button push starting at	<i>300 ms, 400 ms</i> <i>500 ms, 600 ms</i> <i>700 ms, 800 ms</i> <i>900 ms, 1 s</i>	Serves to clearly differentiate between long and short button push. If the push button is pressed for at least as long as the set time, then a long button push will be registered.
Double-click additional function	<i>no</i> <i>yes</i>	No double-click function The double-click parameter page is shown.
Time for double-click	<i>300 ms, 400 ms</i> <i>500 ms, 600 ms</i> <i>700 ms, 800 ms</i> <i>900 ms, 1 s</i>	Serves to differentiate between a double-click and 2 single clicks. Time period in which the second click must begin, in order to recognise a double-click.
Activate block function	<i>no</i> <i>yes</i>	No block function. Show block function parameter page.
Block telegram	<i>Block with 1 (standard)</i> <i>Block with 0</i>	0 = enable 1 = block 0 = block 1 = enable

4.9.4.1 Blinds parameter page

Designation	Values	Description
<i>Operation</i>	<p>One button operation</p> <p><i>DOWN</i></p> <p><i>UP</i></p>	<p>The input distinguishes between a long and a short button push, and can thus carry out 2 functions.</p> <p>The blinds are operated with a single push button. Short button push = Step. Long button push = Move.</p> <p>Short button push = Step. Long button push = lowering.</p> <p>Short button push = Step. Long button push = raising.</p>
<i>Movement is stopped by</i>	<p><i>releasing the button</i></p> <p>Short operation</p>	How is the stop command to be triggered?
<i>Response in case of bus and mains restoration</i>	<p>none</p> <p><i>UP</i></p> <p><i>DOWN</i></p> <p><i>after 5 s UP</i> <i>after 10 s UP</i> <i>after 15 s UP</i></p> <p><i>after 5 s DOWN</i> <i>after 10 s DOWN</i> <i>after 15 s DOWN</i></p>	<p>Do not react.</p> <p>Raise the blind</p> <p>Lower blinds</p> <p>Raise blinds with delay</p> <p>Lower blinds with delay</p>
<i>Response when setting the block</i>	<p>Ignore block</p> <p><i>no response</i></p> <p><i>UP</i></p> <p><i>DOWN</i></p>	<p>The block function is ineffective with this telegram.</p> <p>Do not respond when setting the block.</p> <p>Raise the blind</p> <p>Lower blinds</p>
<i>Response when cancelling the block</i>	<p>no response</p> <p><i>ON</i></p> <p><i>OFF</i></p>	<p>Do not respond when the block is cancelled.</p> <p>Raise the blind</p> <p>Lower blinds</p>

4.9.4.2 Double-click parameter page

Designation	Values	Description								
<i>Object type</i>	Switching (1 bit) Priority (2 bit) Value 0-255 Percentage value (1 byte) 2 byte floating-point number DPT 9.x 4 byte floating-point number DPT 14.x	Telegram type for this object.								
<i>Telegram</i>	<i>With object type = switching 1 bit</i>									
	ON OFF BY	Send switch-on command Send switch-off command Invert current state (ON-OFF-ON etc.)								
	<i>With object type = priority 2 bit</i>									
	inactive	<table border="1"> <thead> <tr> <th>Function</th> <th>Value</th> </tr> </thead> <tbody> <tr> <td>Priority not active (no control)</td> <td>0 (00_{bin})</td> </tr> <tr> <td>Priority ON Priority ON (control: enable, on)</td> <td>3 (11_{bin})</td> </tr> <tr> <td>Priority OFF (control: disable, off)</td> <td>2 (10_{bin})</td> </tr> </tbody> </table>	Function	Value	Priority not active (no control)	0 (00 _{bin})	Priority ON Priority ON (control: enable, on)	3 (11 _{bin})	Priority OFF (control: disable, off)	2 (10 _{bin})
	Function	Value								
	Priority not active (no control)	0 (00 _{bin})								
	Priority ON Priority ON (control: enable, on)	3 (11 _{bin})								
	Priority OFF (control: disable, off)	2 (10 _{bin})								
	ON									
	OFF									
<i>With object type = value 0-255</i>										
0-255	Any value between 0 and 255 can be sent.									
<i>With object type = percentage value 1 byte</i>										
0-100%	Any percentage value between 0 and 100 % can be sent.									
<i>With object type = 2 byte floating-point number</i>										
-670760...670760 Std.: 0	Any value between -670760 and 670760 can be sent.									
<i>With object type = 4 byte floating-point number</i>										
-1E+38.. 1E+38 Std.: 0	Any value between -1E+38 and 1E+38 can be sent. Input format: The ETS only allows the input as a decimal without power. Example: 15234825.123456									
<i>Send cyclically</i>	do not send cyclically every 1 min every 2 min every 3 min ... every 45 min every 60 min	How often should it be sent again?								
<i>Response after restoration of the bus</i>	none	Do not send.								

Designation	Values	Description
<i>supply</i>	<i>As with double-click (immediately)</i> <i>As with double-click (after 5 s)</i> <i>As with double-click (after 10 s)</i> <i>As with double-click (after 15 s)</i>	Send update telegram immediately or with delay. The value to be sent depends on the value configured for double-click.
<i>Response when setting the block</i>	Ignore block <i>no response</i> <i>as with double-click</i>	The block function is ineffective with this telegram. Do not respond when setting the block. Respond as with a double-click.
<i>Response when cancelling the block</i>	no response <i>as with double-click</i>	Do not respond when the block is cancelled. Respond as with a double-click.

4.9.5 Temperature sensor function (only I3 and I4)

i The external inputs I3 and I4 can be used as analogue inputs for temperature measurement via remote sensor.

This function is activated on the **General** parameter page with the parameter *function of the external inputs I3 + I4*.

The temperature measured at I3 can be used internally as an actual value for the RTC (see *Source for actual value* parameter).


The temperature measured at I4 can be used internally as a floor temperature for the RTC. See parameter *Use floor temperature limitation (sensor at I4)* on the **Settings** parameter page).

Notwithstanding the above, both measurement values can also be sent to the bus.

Designation	Values	Description
<i>Activate channel</i>	<i>no</i> <i>yes</i>	Use input?
<i>Sensor type</i>	<i>Remote sensor 1 (9070191)</i> <i>Remote sensor IP 65 (9070459)</i> <i>Floor sensor (9070321)</i>	External temperature sensor 1 Item no. 9070191, for surface-mounted installation. External temperature sensor RAMSES IP65 Item no. 9070459, for surface-mounted installation. Only at input I4: Temperature sensor for laying in floor, IP65 protection rating.
<i>Temperature calibration</i>	<i>-64..+64</i> <i>(x 0.1 K)</i>	Correction value for temperature measurement if sent temperature deviates from the actual ambient temperature. Example: Temperature = 20°C sent temperature = 21°C Correction value = 10 (d.h. 10 x 0.1°C)
<i>Transmit temperature in the event of change of</i>	<i>not due to a change</i> <i>0.2 K</i> <i>0.3 K</i> <i>0.5 K</i> <i>0.7 K</i> <i>1 K</i> <i>1.5 K</i> <i>2 K</i>	Only send cyclically (if enabled) Send if the value has changed by the selected amount since the last transmission.

Designation	Values	Description
<i>Send temperature cyclically</i>	<i>do not send cyclically</i> <i>every min,</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should the current measured value be resent?

4.9.6 Connection of the external inputs

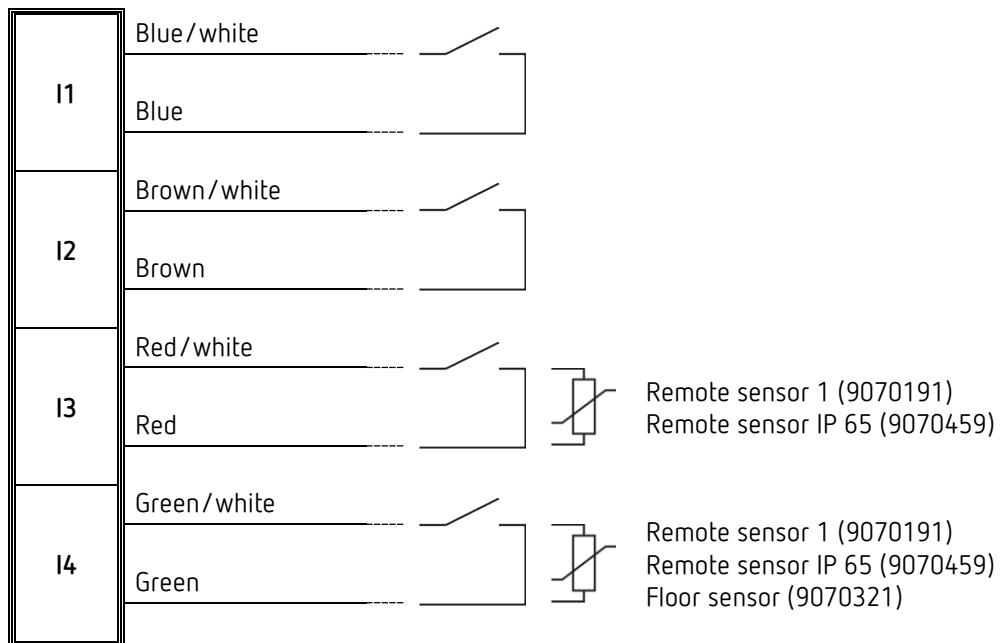

i Contact voltage: 5V SELV
Contact current: 0.5 mA (mean value), 5 mA (peak value)

Only connect floating contacts or Theben temperature sensors.

CAUTION! Observe extra-low voltage / distances!

4.10 Comparator functional block

i This function can be used to compare different values.
 The resulting final value is sent out via object.
 For each of the three inputs, a control value (CO₂, humidity and RTC) or an input object (DPT5.1) can be configured.

i This function is available from application programme version 3.1.
 Only for devices manufactured as of 2113, firmware version 3.0.1 (18 01).

Designation	Values	Description
<i>Output sends</i>	Minimum value <i>Mean value</i> <i>Maximum value</i>	Send only the lowest value of all inputs. Determine and send the mean value of all inputs. Send only the highest value of all inputs.
<i>Input 1</i>	<i>inactive</i> <i>Input object (0-100%)</i> Actuating value – RTC⁴⁵ <i>Actuating value – ventilation CO₂</i> <i>Actuating value – ventilation of humidity</i>	First comparison value Do not use. Receive external value via object. Use current value of the selected actuating value (internally connected).
<i>Input 2</i>	<i>inactive</i> <i>Input object (0-100%)</i> <i>Actuating value – RTC⁴⁶</i> Actuating value – ventilation CO₂ <i>Actuating value – ventilation of humidity</i>	Second comparison value. Do not use. Receive external value via object. Use current value of the selected actuating value (internally connected).
<i>Input 3</i>		Third comparison value.

⁴⁵ Only when the RTC is active. See *Activate room temperature controller (RTC)*, on parameter page **General**.

⁴⁶ Only when the RTC is active. See *Activate room temperature controller (RTC)*, on parameter page **General**.

Designation	Values	Description
	<i>inactive</i> <i>Input object (0-100%)</i> <i>Actuating value – RTC 47</i> <i>Actuating value – ventilation CO2</i> <i>Actuating value – ventilation of humidity</i>	Do not use. Receive external value via object. Use current value of the selected actuating value (internally connected).
<i>Send in cycles</i>	Do not send in cycles <i>every min</i> <i>every 2 min</i> <i>every 3 min</i> ... <i>every 45 min</i> <i>every 60 min</i>	How often should it be resent?
<i>Send actuating value on change</i>	not due to a change 1% 5% 10% 15% 20%	only send cyclically (if enabled) Send if the value has changed by the selected amount since the last transmission.
<i>Response when setting the block</i>	Ignore block <i>do not send</i> <i>Send following value</i>	No block function, no further block parameters. Response to block telegram.
<i>Value⁴⁸</i>	0-100%	Value to be sent in lock mode.
<i>Response when cancelling the block</i>	<i>do not send</i> update	No response. send the current actuating value (comparison value).
<i>Block telegram</i>	Block with 1 (standard) <i>Block with 0</i>	0 = cancel block 1 = block 0 = block 1 = cancel block

⁴⁷ Only when the RTC is active. See *Activate room temperature controller (RTC)*, on parameter page **General**.

⁴⁸ Only available if *Response when setting the block* = *Send following value*.

5 Typical applications

These typical applications are designed to aid planning and are not to be considered an exhaustive list.

It can be extended and updated as required.

5.1 Control of air quality plus 3 stage manual fan control.

A fan is to provide fresh air if the CO₂ content exceeds the set thresholds.

Additional manual control:

There is a choice of 3 manual fan stages (forced operation).

For manual operation, a 4-way button is connected to the external inputs I1-I4.

Button 1	Start forced stage 1
Button 2	Start forced stage 2
Button 3	Start forced stage 3
Button 4	Restore automatic operation

After reset or restoration of the bus supply, the fan operates in automatic mode, i.e. depending on CO₂ content.


If one of the buttons 1...3 is pressed, AMUN 716 S sends the forced command (1) and the desired fan stage to the FCA 2 actuator.

Forced operation is ended with button 4, and automatic operation will be restored.

5.1.1 Devices

- Amun 716 S (Order No. 7169230)
- FCA 2 (4920210)

5.1.2 Overview

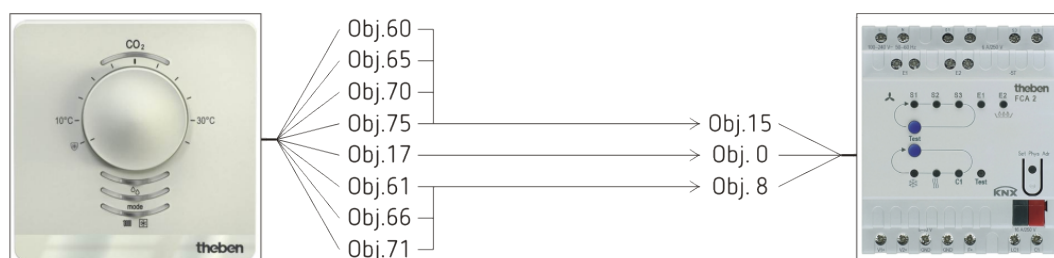

5.1.3 Objects and links

No.	Amun 716 S Object name	No.	FCA 1 Object name	Comment
17	<i>Ventilation CO₂ – actuating value 0-100%</i>	0	<i>Actuating value for fan</i>	Fan control depending on CO ₂ content
60	<i>Channel I1.1 – switching</i>	15	<i>Fan Forced/Auto</i>	Trigger forced operation with an ON telegram
61	<i>Channel I1.2 – send value</i>	8	<i>Fan stage in forced operation</i>	Specify manual stage 1
65	<i>Channel I2.1 – switching</i>	15	<i>Fan Forced/Auto</i>	Trigger forced operation with an ON telegram
66	<i>Channel I2.2 – send value</i>	8	<i>Fan stage in forced operation</i>	Specify manual stage 2
70	<i>Channel I3.1 – switching</i>	15	<i>Fan Forced/Auto</i>	Trigger forced operation with an ON telegram
71	<i>Channel I3.2 – send value</i>	8	<i>Fan stage in forced operation</i>	Specify manual stage 3
75	<i>Channel I4.1 – switching</i>	15	<i>Fan Forced/Auto</i>	Finish forced operation with an OFF telegram. Automatic operation will be restored.

5.1.4 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

Amun 716:

Parameter page	Parameter	Setting	
CO₂ thresholds	Number of CO ₂ thresholds	3	
Ventilation of CO₂	Fan control via	fixed values	
	If CO ₂ below threshold 1	0%	
	If CO ₂ between threshold 1 and 2	30%	
	If CO ₂ between threshold 2 and 3	70%	
Channel I1	Activate channel	ON	
	Channel function	Push button	
	Number of telegrams	Two telegrams	
Button object 1	Object type	Switching (1 bit)	
	Send after short operation	Send telegram	
	Telegram	ON	
	Send after long operation	do not send	
	Send after double-click	do not send	
	Send cyclically	No	
Button object 2	Response after restoration of the bus supply	None	
	Object type	Value 0-255	
	Send after short operation	Send telegram	
	Telegram	1	
	Send after long operation	do not send	
	Send after double-click	do not send	
Channel I2	Send cyclically	No	
	Response after restoration of the bus supply	None	
	All parameters:	as channel I1	
	Button object 1	All parameters:	as channel I1
	Button object 2	Telegram	2
		All other parameters:	as channel I1
Channel I3	All parameters:	as channel I1	
Button object 1	All parameters:	as channel I1	
Button object 2	Telegram	3	
	All other parameters:	as channel I1	
Channel I4	Activate channel	ON	
	Channel function	Push button	
	Number of telegrams	One telegram	
Button object 1	Object type	Switching (1 bit)	
	Send after short operation	Send telegram	
	Telegram	OFF	
	Send after long operation	do not send	
	Send after double-click	do not send	
	Send cyclically	No	
Response after restoration of the bus supply	None		

FCA 2:

Parameter page	Parameter	Setting
<i>General</i>	<i>Supported function</i>	<i>Ventilation</i>
	<i>Switch fan between auto and forced</i>	<i>via object auto/forced, forced = 1</i>
<i>Fan</i>	<i>Fan controller</i>	<i>Standard (1-3 stages)</i>
	<i>Number of fan stages</i>	<i>3 stages</i>
	<i>Switch-on threshold for fan stage 1</i>	<i>20%</i>
	<i>Switch-on threshold for fan stage 2</i>	<i>60%</i>
	<i>Switch-on threshold for fan stage 3</i>	<i>90%</i>
	<i>Format compulsory control and limitation</i>	<i>Fan stages (0 - 3)</i>

5.2 Controlling ventilation flaps depending on room air quality (CO2) or heating/cooling demand.

In modern buildings, the energy demand for room air conditioning is reduced due to optimum building insulation and highly insulating windows. At the same time, controlled room ventilation is essential in these buildings to ensure the hygienic and physical minimum air renewal. In combination, it is possible to provide room air conditioning also via the controlled room ventilation, making additional systems unnecessary.

The comparator integrated in the AMUN 716 S KNX offers optimum capabilities, to control e.g. ventilation flaps depending on room air quality (CO2) or heating/cooling demand.


In a room, the ventilation flaps are to be controlled depending on CO2 and heating/cooling demand, i.e. the ventilation flaps open when fresh air is needed, or when heating or cooling energy is needed. The AMUN 716 S KNX collects and evaluates the physical quantities and sends the actuating value for the control of the ventilation flaps to a channel of the HMT 12 S KNX heating actuator. The actuator controls up to 12 ventilation flaps/rooms individually with a 0-10 V output signal.

i This function is available from application programme version 3.1. Only for devices from date of manufacture 2113, firmware version 3.0.1 (18 01).

5.2.1 Devices

- AMUN 716 S KNX (7169230)
- HMT 12 S KNX (4900374)

5.2.2 Overview

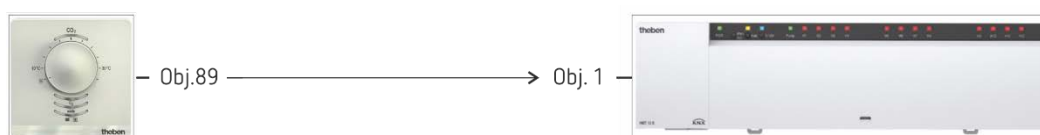

5.2.3 Objects and links

No.	AMUN 716 S Object name	No.	HMT 12 S Object name	Comment
89	Comparator - output	1	Channel H1 – continuous actuating value	Actuating value for ventilation flap control

5.2.4 Important parameter settings

Standards or customer-defined parameter settings apply to unlisted parameters.

AMUN 716 S:

Parameter page	Parameters	Setting
<i>General</i>	<i>Activate room temperature controller (RTC)</i>	<i>yes</i>
<i>Ventilating CO₂</i>	<i>Fan control via</i>	<i>PI controller</i>
	<i>Setpoint</i>	<i>800 ppm</i>
	<i>Minimum actuating value</i>	<i>20%</i>
	<i>Response when falling below the minimum actuating value</i>	Customer-specific Setting: <i>Output 0% ⁴⁹</i> or <i>Output minimum actuating value ⁵⁰</i>
<i>Comparator</i>	<i>Output sends</i>	<i>Maximum value</i>
	<i>Input 1</i>	<i>Actuating value – RTC</i>
	<i>Input 2</i>	<i>Actuating value – ventilation CO₂</i>
	<i>Input 3</i>	<i>Inactive</i>

HMT 12 S:

Parameter page	Parameters	Setting
<i>General</i>	<i>Activate room temperature controller (RTC)</i>	<i>yes</i>
<i>Channel H1</i>		
<i>Configuration options</i>	<i>Type of valve control</i>	<i>0-10 V</i>

⁴⁹ If the actuating value is too low, always switch off the fan.

⁵⁰ The fan should not be at a complete standstill, but continue to run with the minimum actuating value, and thus ensure a permanent air exchange.

5.3 CO₂-dependent ventilation with PI control

A fan with infinitely variable speed control is to provide an air quality as constant as possible. The fan speed is precisely controlled by using a PI controller and a dimming actuator.

5.3.1 Devices

- Amun 716 S (Order No. 7169230)
- DM 2 T (Order No. 4940270)

5.3.2 Overview



5.3.3 Objects and links

No.	AMUN 716 S Object name	No.	DM 2 T Object name	Comment
17	Ventilation CO ₂ – actuating value 0-100%	2	Channel C1 – dimming value	Actuating value for fan speed.

5.3.4 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

AMUN 716 S:

Parameter page	Parameter	Setting
<i>Ventilating CO₂</i>	<i>Fan control via</i>	<i>PI controller</i>
	<i>Setpoint</i>	<i>800 ppm</i>
	<i>Minimum actuating value</i>	<i>20%</i>
	<i>Response when falling below the minimum actuating value</i>	Customer-specific setting: <i>Output 0%⁵¹</i> or <i>Output minimum actuating value⁵²</i>

DM 2 T:

Parameter page	Parameter	Setting
<i>Dimming response</i>	<i>Load selection</i>	<i>Fan (soft switching deactivated)</i>
	<i>Start-up time</i>	Customer-specific, depending on size of the fan.
	<i>Minimum dimming value</i>	<i>20%</i>
	<i>Dimming time 1 from 0 to 100 %</i>	<i>60 s</i>
	<i>When receiving an absolute value (8 bit)</i>	<i>Soft on with dimming time 1</i>

⁵¹ If the actuating value is too low, always switch off the fan.

⁵² The fan should not be at a complete standstill, but continue to run with the minimum actuating value, and thus ensure a permanent air exchange.

5.4 Base function: Humidity-dependent ventilation, single-stage.

At a relative humidity above 75 %, the fan has to switch on.

5.4.1 Devices

- Amun 716 S (Order No. 7169230)
- RM 4 U (Order No. 4940223)

5.4.2 Overview



5.4.3 Objects and links

No.	AMUN 716 S Object name	No.	RM 4 U Object name	Comment
8	Humidity threshold 1 - switching	0	Channel C1 - switch object	Switch On/Off command.

5.4.4 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

AMUN 716:

Parameter page	Parameter	Setting
<i>Humidity thresholds</i>	<i>Number of humidity thresholds</i>	1
	<i>Humidity threshold 1</i>	75%

RM 4 U:

Parameter page	Parameter	Setting
<i>Channel C1: Configuration options</i>	<i>Channel function</i>	<i>switch On/Off</i>

5.5 Location school: Heating with presence detector and frost protection via window contact.

The room temperature controller (RTC) controls one or more actuators.

Once someone enters the room the controller has to change to comfort mode, otherwise it operates in standby mode during the day and in night mode at night.

If a window is opened, the controller has to automatically change to frost protection mode. A presence detector is used for presence recognition.

The presence telegram is only sent after a switch-on delay so that the heating is not activated if the room is only occupied for a short time.

All windows are fitted with window contacts. These are connected with input E1 on the device. As an alternative, the external interface of the Cheops drive actuator can also be used for this.


The window status is sent via a common group address to the window position input object. The device will recognise when a window is opened and automatically switch to frost protection mode.

When the window is closed, the previously set operating mode will be restored.

5.5.1 Devices

- Amun 716 S (Order No. 7169230)
- PlanoSpot 360 KNX (Order No. 2039100)
- TR 648 top2 RC KNX (Order No. 6489212)
- Cheops drive (Order No. 7319200)

5.5.2 Overview

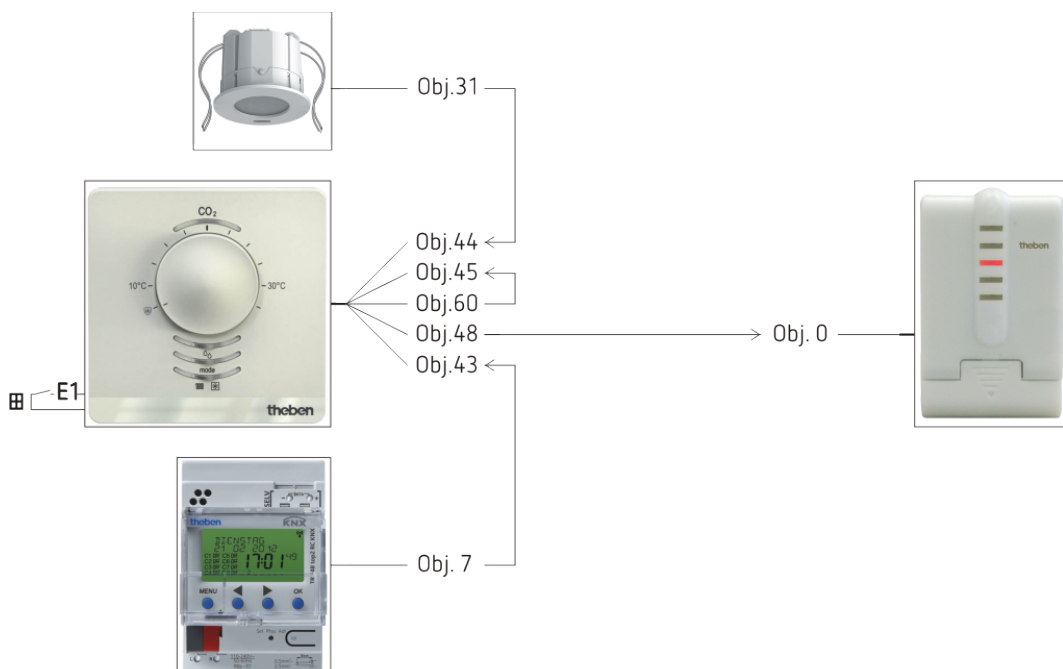

5.5.3 Objects and links

No.	PlanoSpot 360 KNX Object name	No.	Amun 716 S Object name	Comment
31	Presence channel C4.1	44	Presence	Presence telegram. Triggers comfort mode.

No.	TR 648 top2 Object name	No.	Amun 716 S Object name	Comment
7	C1.1 switching channel – HVAC operating mode	43	Operating mode preset	Switches the controller between standby and night.

No.	Amun 716 S Object name	No.	Cheops drive Object name	Comment
48	Heating actuating value	0	Actuating value	Actuating value for actuator.

No.	Amun 716 S Object name	No.	Amun 716 S Object name	Comment
60	Channel I1.1 switching	45	Window status	The windows status is detected at input E1 (window contact) and sent to the controller (window status) via a group address. When opening the window, the controller changes into frost protection mode.

5.5.4 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

Amun 716 S:

Parameter page	Parameter	Setting
<i>RTC setting</i>	<i>Control</i>	<i>Heating control only</i>
	<i>Rotary control function</i>	<i>Blocked</i>
	<i>Button function</i>	<i>Blocked</i>
<i>Operating Mode</i>	<i>Objects for determining the operating mode</i>	<i>New: Operating mode, presence, window status</i>
	<i>Type of presence sensor type (presence obj.)</i>	<i>Presence detector</i>
<i>Channel I1</i>	<i>Activate channel</i>	<i>ON</i>
	<i>Channel function</i>	<i>Switch</i>
	<i>Number of telegrams</i>	<i>One telegram</i>
<i>Switch object 1</i>	<i>Object type</i>	<i>Switching (1 bit)</i>
	<i>Send if input = 1</i>	<i>yes</i>
	<i>Telegram</i>	<i>ON</i>
	<i>Send if input = 0</i>	<i>yes</i>
	<i>Telegram</i>	<i>OFF</i>
	<i>Send cyclically</i>	<i>yes</i>
	<i>Response after restoration of the bus supply</i>	<i>update (immediately)</i>

PlanoSpot 360 KNX:

Parameter page	Parameter	Setting
<i>General</i>	<i>Channel C4 – presence</i>	<i>active</i>
<i>Channel C4 – presence</i>	<i>Presence switch-on delay</i>	<i>5 min</i>
	<i>Presence time delay</i>	<i>10 min</i>

TR 648 top2 RC:

Parameter page	Parameter	Setting
<i>General</i>	<i>Activate time switch channel C1</i>	<i>yes</i>
<i>Switching channel C1</i>	<i>Telegram type C1.1</i>	<i>HVAC operating mode</i>
	<i>As with clock -> ON</i>	<i>send following telegram once</i>
	<i>Telegram</i>	<i>Standby</i>
	<i>With clock -> OFF</i>	<i>send following telegram once</i>
	<i>Telegram</i>	<i>Temperature reduction at night</i>

Cheops drive:

The standard values can be used here.

5.6 Location single-family house:

5.6.1 Heating with presence detector and frost protection via window contact.

The room temperature controller (RTC) controls one or more actuators. Comfort mode is triggered by other button at the device, otherwise the controller operates in standby mode during the day and in night mode at night. If a window is opened, the controller has to automatically change to frost protection mode.


All windows are fitted with window contacts. These are connected with input E1 on the device.

The window status is sent via a common group address to the window position input object. The device will recognise when a window is opened and automatically switch to frost protection mode. When the window is closed the previously set operation mode will be restored.

5.6.2 Devices

- Amun 716 S (Order No. 7169230)
- TR 648 top2 RC KNX (Order No. 6489212)
- HM 6 T (4940240)

5.6.3 Overview

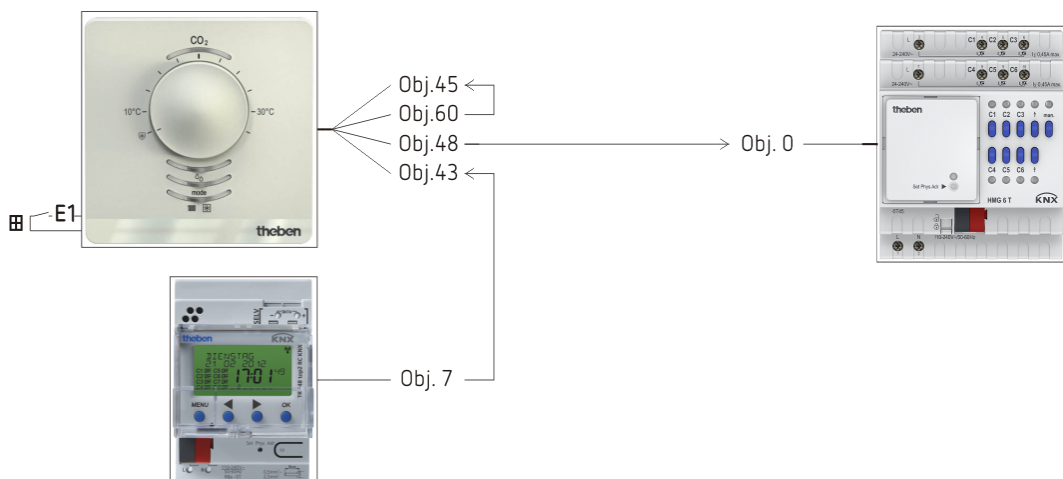

5.6.4 Objects and links

No.	TR 648 top2 Object name	No.	Amun 716 S Object name	Comment
7	C1.1 switching channel – HVAC operating mode	43	Operating mode preset	Switches the controller between standby and night.

No.	Amun 716 S Object name	No.	HM 6 T Object name	Comment
48	Heating actuating value	0	Continuous actuating value	Actuating value for the heating actuator.

No.	Amun 716 S Object name	No.	Amun 716 S Object name	Comment
60	Channel I1.1 switching	45	Window status	The windows status is detected at input E1 (window contact) and sent to the controller (window status) via a group address. When opening the window, the controller changes into frost protection mode.

5.6.5 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

Amun 716 S:

Parameter page	Parameter	Setting
RTC setting	<i>Control</i>	<i>Heating control only</i>
	<i>Rotary control function</i>	<i>Manual offset</i>
	<i>Button function</i>	<i>Presence button</i>
Operating Mode	<i>Objects for determining the operating mode</i>	<i>New: Operating mode, presence, window status</i>
Channel I1	<i>Activate channel</i>	<i>ON</i>
	<i>Channel function</i>	<i>Switch</i>
	<i>Number of telegrams</i>	<i>One telegram</i>
Switch object 1	<i>Object type</i>	<i>Switching (1 bit)</i>
	<i>Send if input = 1</i>	<i>yes</i>
	<i>Telegram</i>	<i>ON</i>
	<i>Send if input = 0</i>	<i>yes</i>
	<i>Telegram</i>	<i>OFF</i>
	<i>Send cyclically</i>	<i>yes</i>
	<i>Response after restoration of the bus supply</i>	<i>update (immediately)</i>

TR 648 top2 RC:

Parameter page	Parameter	Setting
General	<i>Activate time switch channel C1</i>	<i>yes</i>
Switching channel C1	<i>Telegram type C1.1</i>	<i>HVAC operating mode</i>
	<i>As with clock -> ON</i>	<i>send following telegram once</i>
	<i>Telegram</i>	<i>Standby</i>
	<i>With clock -> OFF</i>	<i>send following telegram once</i>
	<i>Telegram</i>	<i>Temperature reduction at night</i>

HM 6 T:

Parameter page	Parameter	Setting
Channel H1: Configuration options	<i>Channel function</i>	<i>Heating actuator</i>
	<i>Type of actuating value</i>	<i>continuous..</i>


5.7 Switching, dimming light and controlling blinds

Via the external inputs, it is possible to simply control various actuators, such as switching, blinds, and dimming actuators, with conventional buttons.

5.7.1 Devices

- Amun 716 S (Order No. 7169230)
- RM 4 U (Order No. 4940223)
- DM 2 T (Order No. 4940270)
- JM 4 T (Order No. 4940250)

5.7.2 Overview

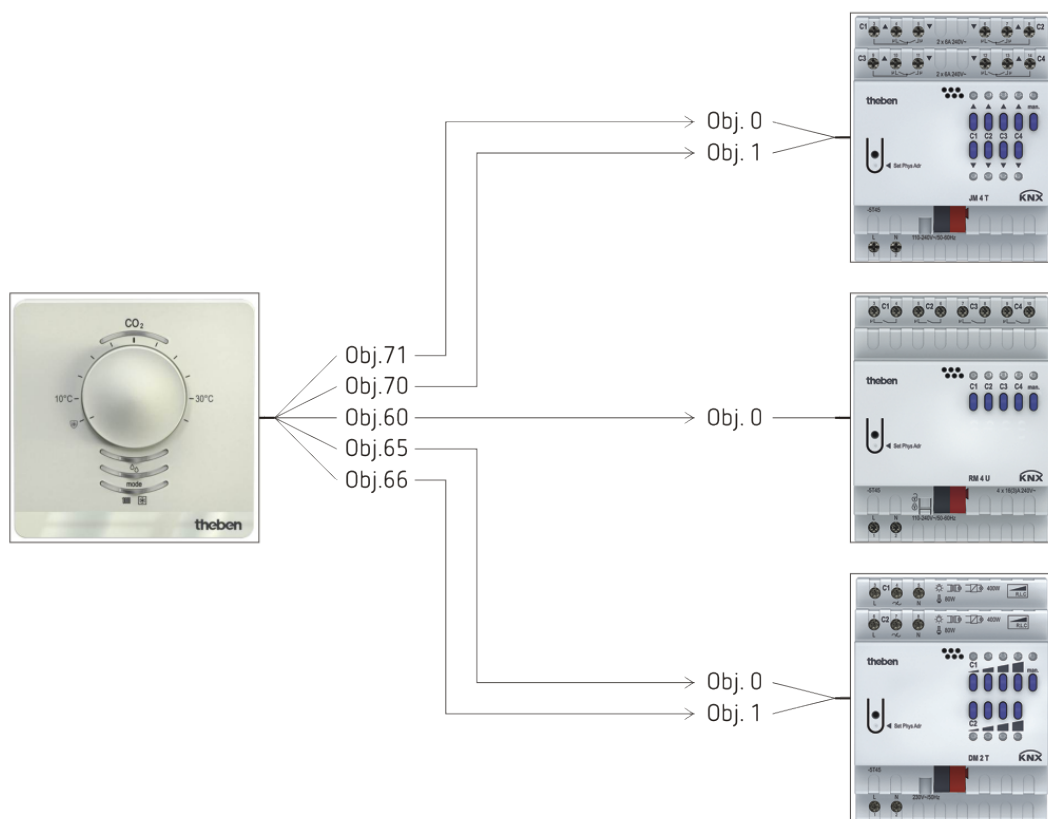

5.7.3 Objects and links

No.	Amun 716 S Object name	No.	RM 4 U Object name	Comment
60	Channel I1.1 – switching	0	Channel C1 – switch object	Switch command for the light.

No.	Amun 716 S Object name	No.	DM 2 T Object name	Comment
65	Channel I2 – switching	0	Switching ON/OFF	Switch command for the light.
66	Channel I2 – brighter/darker	1	Brighter/darker	4 bit dimming command

No.	Amun 716 S Object name	No.	JM 4 T Object name	Comment
70	Channel 3 – step/stop	1	Step/stop	Switch command for the light.
71	Channel I3 – up/down	0	Up/Down	1 bit operating command

5.7.4 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

Amun 716 S:

Parameter page	Parameter	Setting
Channel I1	<i>Activate channel</i>	<i>ON</i>
	<i>Channel function</i>	<i>Push button</i>
	<i>Number of telegrams</i>	<i>One telegram</i>
Button object 1	<i>Object type</i>	<i>Switching (1 bit)</i>
	<i>Send after short operation</i>	<i>Send telegram</i>
	<i>Send after long operation</i>	<i>do not send</i>
	<i>Send after double-click</i>	<i>do not send</i>
Channel I2	<i>Activate channel</i>	<i>ON</i>
	<i>Channel function</i>	<i>Dimming</i>
	<i>Double-click additional function</i>	<i>no</i>
Dimming	<i>Reaction to long/short</i>	<i>One button operation</i>
Channel I3	<i>Activate channel</i>	<i>ON</i>
	<i>Channel function</i>	<i>Blinds</i>
	<i>Double-click additional function</i>	<i>no</i>
Blinds	<i>Operation</i>	<i>One button operation</i>

RM 4 U:

Parameter page	Parameter	Setting
<i>Channel C1: Configuration options</i>	<i>Channel function</i>	<i>switch On/Off</i>

DM 2 T:

Parameter page	Parameter	Setting
<i>Dimming response</i>	<i>Load selection</i>	To be set system-specific.

JM 4 T

Parameter page	Parameter	Setting
<i>Channel C1: Configuration options</i>	<i>Type of motor</i>	To be set system-specific.
	<i>Type of hanging</i>	<i>Blinds..</i>
<i>Drive settings</i>	<i>Complete runtime down (s)</i>	To be set system-specific.
	<i>Complete slat turning</i>	To be set system-specific.

5.8 Two-stage heating for floor and radiators

A room is heated via the floor and additionally via radiators. Both heating sources have very different requirements and are therefore controlled via 2 separate heating stages.

The first heating stage controls and limits the floor temperature (slow, inert heating).

The second heating stage controls one or several radiators (fast heating).

The floor temperature is measured by an external floor sensor (Order No. 907321) at input E4.


Here, the focus is on the 2 heating stages with floor temperature limitation.

The automatic change of the operating mode via time switch or presence detector, as well as the change of the operating mode and the frost protection function are not explicitly mentioned again (see previous examples).

5.8.1 Devices

- Amun 716 S (Order No. 7169230)
- HM 6 T (4940240)

5.8.2 Overview

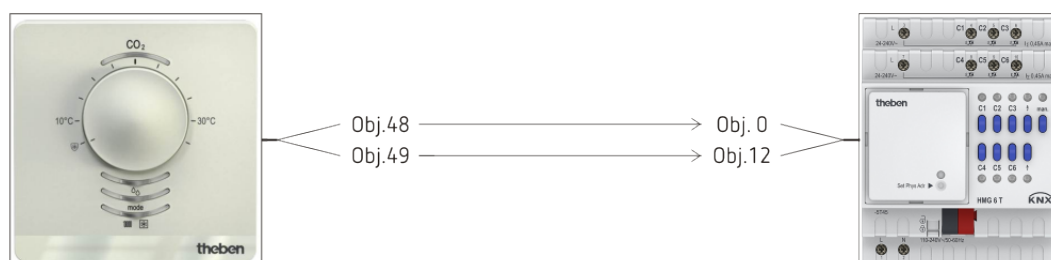

5.8.3 Objects and links

No.	Amun 716 S Object name	No.	HM 6 T Object name	Comment
48	Heating actuating value	0	Channel H1 – continuous actuating value	Actuating value for underfloor heating
49	Actuating value additional heating stage	12	Channel H2 – continuous actuating value	Actuating value for the radiators

5.8.4 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

Amun 716 S:

Parameter page	Parameter	Setting
General	<i>Function of the external inputs I3 + I4</i>	<i>Temperature sensor input..</i>
Setting	<i>Control</i>	<i>Heating control only</i>
	<i>Use floor temperature limitation (sensor at I4)</i>	<i>yes</i>
Heating control	<i>Type of control</i>	<i>continuous</i>
	<i>Number of heating stages</i>	<i>Main stage and additional stage</i>
	<i>Setting the control parameters</i>	<i>Via installation type</i>
	<i>Installation type</i>	<i>Underfloor heating</i>
Heating setpoints	<i>Maximum floor temperature</i>	<i>e.g. 30 °C</i>
Additional stage heating	<i>Type of actuating value</i>	<i>Percent</i>
	<i>Difference between main stage and additional stage</i>	<i>0 K</i>
Channel I4	<i>Activate channel</i>	<i>ON</i>
	<i>Sensor type</i>	<i>Floor sensor (9070321)</i>

HM 6 T:

Parameter page	Parameter	Setting
Channel H1: Configuration options	<i>Channel function</i>	<i>Heating actuator</i>
	<i>Type of actuating value</i>	<i>continuous..</i>
Channel H2: Configuration options	<i>Channel function</i>	<i>Heating actuator</i>
	<i>Type of actuating value</i>	<i>continuous..</i>

6 Typical application of multi-sensor KNX

This application example is intended as a planning aid and does not claim to be complete. It can be extended and updated as required.

6.1 Meeting room location: Automatic control of ventilation and lighting.


A fan should provide fresh air if the CO₂ content exceeds the set thresholds. The lighting adapts automatically depending on natural daylight (constant lighting control). The lighting can also be switched and dimmed manually.

The measurements are taken in a device, which is mounted on the ceiling (multi-sensor KNX).

6.1.1 Devices

- Set basic KNX Multi (Order No. 9070900)
 - thePrema P360 KNX (Order No. 2079000)
 - FCA 2 (Order No. 4920210)
 - DALI Gateway KNX plus (Order No. 9070929)
 - iON 102 KNX (Order No. 4969232)
- } Multi-sensor KNX

6.1.2 Overview

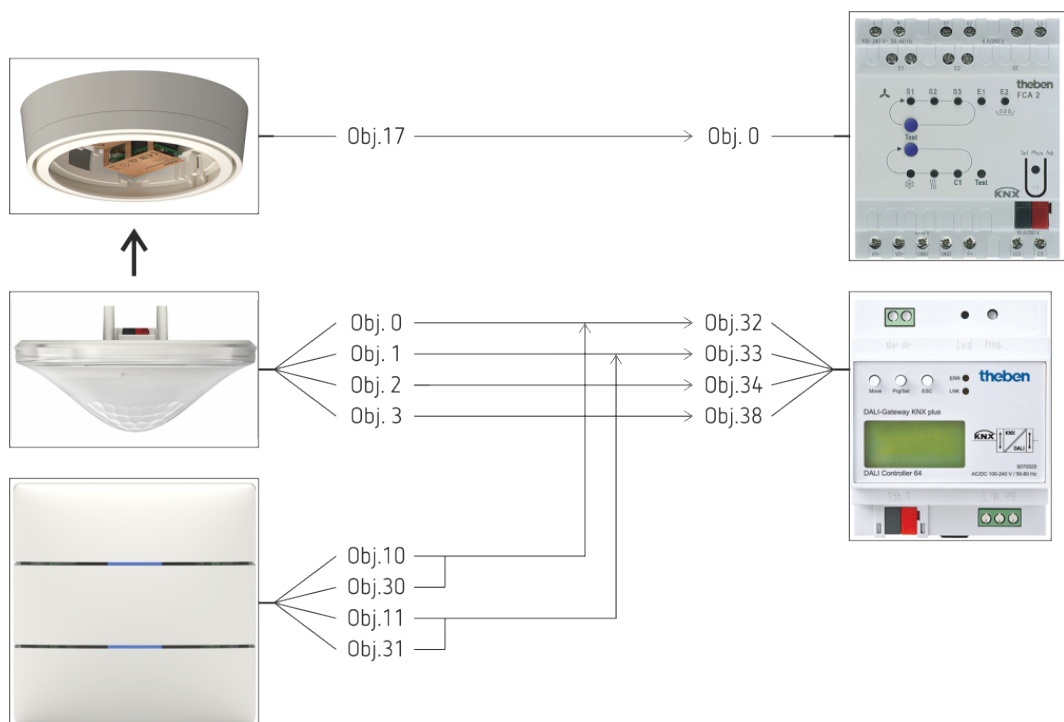

6.1.3 Objects and links

No.	Amun 716 S Object name	No.	FCA 2 Object name	Comment
17	<i>Ventilation CO₂ – actuating value 0-100%</i>	0	<i>Actuating value for fan</i>	Fan control depending on CO ₂ content

No.	thePrema P360 KNX Object name	No.	DALI Gateway KNX plus Object name	Comment
0	<i>Channel C1 light / switching</i>	32	<i>Group 1 / switching</i>	DALI Gateway plus KNX from Version V2.0
1	<i>Channel C1 light / brighter/darker</i>	33	<i>Group 1 / dimming</i>	
2	<i>Channel C1 light / send value</i>	34	<i>Group 1 / set value</i>	
3	<i>Channel C1 light / feedback value</i>	38	<i>Group 1 / status value</i>	

No.	iON 102 KNX Object name	No.	DALI Gateway KNX plus Object name	Comment
10	<i>Button T1 switching</i>	32	<i>Group 1 / switching</i>	Switching on and off via push button
30	<i>Button T2 switching</i>			
11	<i>Button T1 brighter</i>	33	<i>Group 1 / dimming</i>	Dimming via push button
31	<i>Button T2 darker</i>			

6.1.4 Important parameter settings

Standard or customer-defined parameter settings apply to unlisted parameters.

Amun 716:

Parameter page	Parameter	Setting
General information	Device type	Set basic KNX Multi (9070900)
CO₂ thresholds	Number of CO ₂ thresholds	3
Ventilation of CO₂	Fan control via	fixed values
	If CO ₂ below threshold 1	0%
	If CO ₂ between threshold 1 and 2	30%
	If CO ₂ between threshold 2 and 3	70%
	If CO ₂ greater than threshold 3	100%

thePrema P360:

Parameter page	Parameter	Setting
General information	Operating mode	Master
	Master operating mode	Individual switching
	Function channel C1 light	Constant lighting control..
Channel C1 - light	Configuration type	Fully automatic device
	Brightness setpoint value	500 lx
	Lighting time delay	10 min (as per customer specification)

DALI Gateway KNX plus (from Version V2.0):


Parameter page	Parameter	Setting
General information	Operating mode	Normal operation
	Function of additional object	no Object
	Panic mode enabled	No
Group 1		
Behaviour	Switch-on value	100%
	Switch-on behaviour	Dim to value in 10 seconds
	Switch-off value	0%
	Switch-off behaviour	Apply value immediately
	Behaviour on value setting	Dim to value in 10 seconds
	Time for dimming	10 seconds
	Max. value for dimming	100%
	Min. value for dimming	0%
	Switch-on via dimming	No

iON 102 KNX:

Parameter page	Parameter	Setting
Settings	Device type	iON 102 KNX
Button T1	Function	Dimming
	Response to long / short	brighter / ON
Button T2	Function	Dimming
	Response to long / short	darker / OFF

7 Appendix

7.1 CO₂ guide values

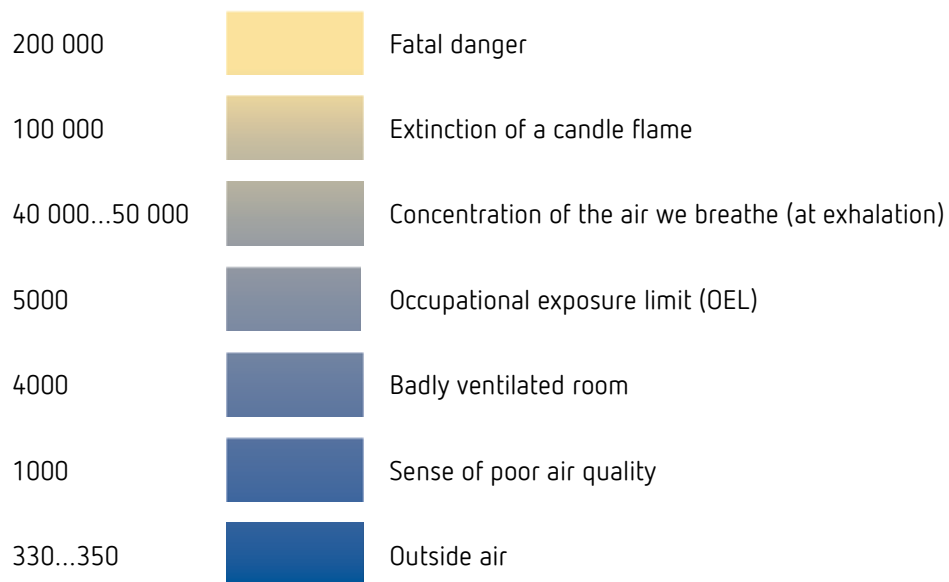

All values in ppm (parts per million)

7.2 LED colours for room air quality and temperature control⁵³



<i>CO2</i>	CO2	[value] < threshold 1
		Threshold 1 < [value] < threshold 2
		Threshold 2 < [value] < threshold 3
		Threshold 3 > [value]


<i>Relative humidity</i>	☹	[value] < threshold 1
		Threshold 1 < [value] < threshold 2
		Threshold 2 < [value] < threshold 3
		Threshold 3 > [value]

<i>Operating Mode</i>	mode	Frost
		Eco
		Standby
		Comfort

<i>Status RTC</i>	☹ ☹	Heating
		Cooling

⁵³ Only Amun 716 S

7.3 Switching response using the example of thresholds for CO₂

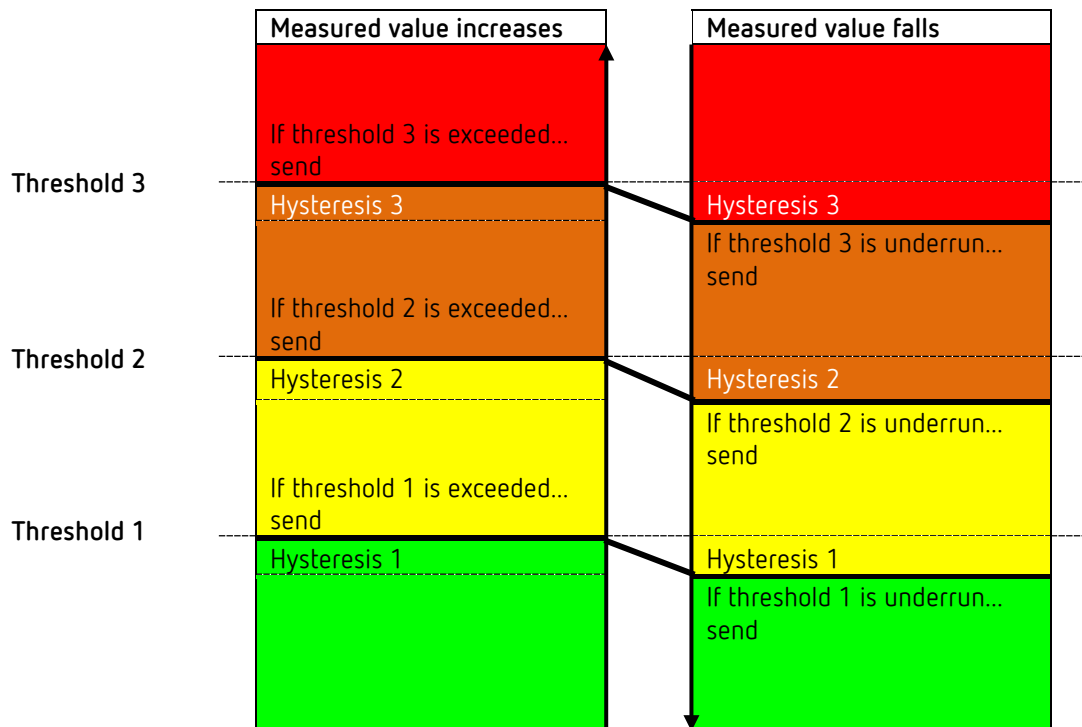

The telegram of the last exceeded/underrun threshold is sent.
 If several thresholds are exceeded from one measurement cycle to the next then the telegrams are sent at an increasing value (from thresholds 1-3) whereas with cyclical sending, only the telegram for the last exceeded threshold is sent cyclically. The same applies with falling values.

The switching behaviour is identical for the humidity thresholds, however, the colours⁵⁴ are different (see above).

⁵⁴ Only Amun 716 S

7.4 Fan control

Note the following for fan control using percentage values:

Amun sends a percentage value as the control variable for each threshold. This control variable (in accordance with the set threshold) is transferred to the fan coil actuator as a fan stage between 0 and 3.

Important: The sent actuating value should always be a little higher than the threshold setting of the fan coil actuator.

Example:

Threshold for Fan stage	Set values for Amun 716 S	Recommended values for FCA 2
1	20%	10%
2	50%	40%
3	80%	70%

If fan stage 2 is selected using the button, the respective object (object 9 or 19) sends the actuating value 50%.

As the threshold for stage 2 in the fan coil actuator is set at 40%, the received control variable of 50% is clearly allocated to fan stage 2 and accepted by the fan.

7.5 Relative humidity

Relative humidity is a measurement for the saturation of air with water vapour. This is expressed as the relationship to the maximum amount absorbed at the corresponding temperature.

Example: A relative humidity of 60% means that the air contains 60% of the maximum absorbable amount of water vapour.


At 100% the air is completely saturated and cannot absorb any more humidity.

Condensation or mist are produced if the volume of available water vapour exceeds this 100% threshold.

The ability of air to absorb water vapour depends on temperature.

Warm air can absorb more water vapour than cold air.

7.6 Fresh air calibration

 If the device is properly used, a calibration procedure is not necessary.



A wrong calibration can cause malfunctions of the device and the connected systems. Please use the calibration only if absolutely necessary. Exhaling in close proximity of the device can distort the measurement.

With a fresh air calibration, the CO₂ sensor is calibrated, i.e. gauged to a new reference value. In 2013, an average concentration of 400 ppm was determined in the atmosphere. Normally, this value can be taken as a reference value.

7.6.1 Calibration procedure

First, the CO₂ sensor has to get as much fresh air as possible.

This is achieved either by sufficient ventilation (open all windows), or, if somehow possible, by moving the device into the fresh air for the entire duration of the calibration.

Set the *Enable fresh air calibration* parameter to *yes*, and download the application software with the ETS again.

For starting the calibration:


1. Send a switch on telegram to object 7 *Fresh air calibration*.
2. Within 2 h, press and hold the operating mode button for 5 s.

The calibration is started and takes approx. 20 minutes.

During the measurement, the CO₂ LED flashes with an ON time of 750 ms and an OFF time of 250 ms.

After finishing the fresh air calibration, a telegram is written to the *Alarm info* object („CO₂ CAL OK”), and the flashing of the LEDs stops.


In case of an error during the calibration, this is also shown by an alarm message (“CO₂ CAL ERR”) and an error code.

 During the calibration, the procedure it can be cancelled, by again pressing and holding the operating mode button for 5 s.

7.7 Comfort

In heating and air conditioning technology, the degree of comfort shows the range of the air conditioning in which people have a sense of well-being or not.

Comfort is defined by this diagram:

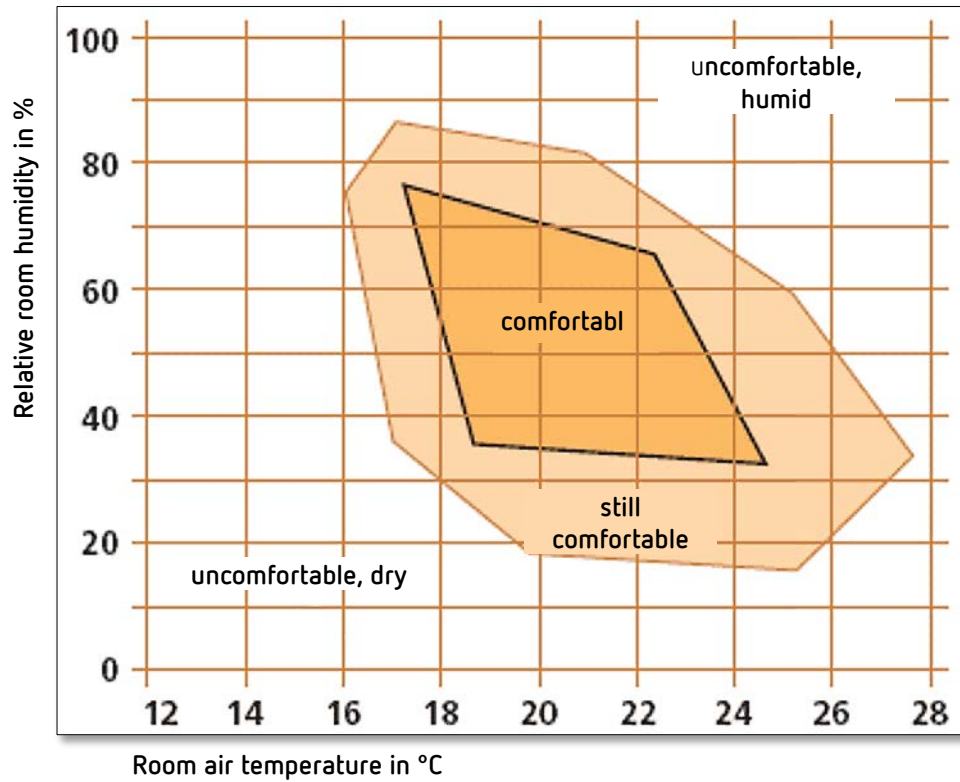


7.8 PWM cycle

7.8.1 Basic principle

The 50% control variable is converted into switch-on/switch-off cycles in order to achieve a heating output of 50%.

The actuator is switched on for 50% of the time and switched off for 50% of the time over a fixed period (10 minutes in our example).


Example: 2 different turn-on times of 2 and 7 minutes indicate the implementation of 2 different actuating values that is once 20% and once 70% during a PWM period of 10 minutes.

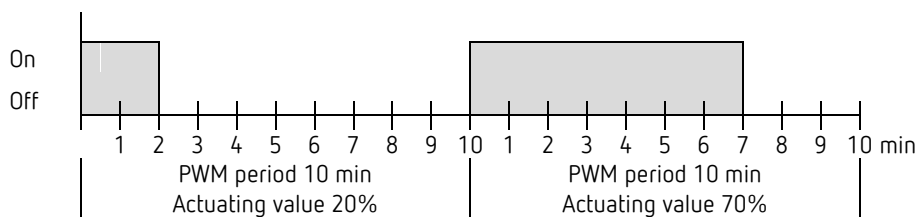

7.8.2 Response to changes in the actuating value


i Every change in the actuating value is immediately transferred to the PWM cycle in order to respond to changes in the quickest possible time.

Example 1: The last actuating value was 20% (A).
 A new actuating value of 50% is received during the cycle (B).
 The output is immediately switched on and the missing 30% switch-on time is added.
 The next cycle is executed with 50% (C).

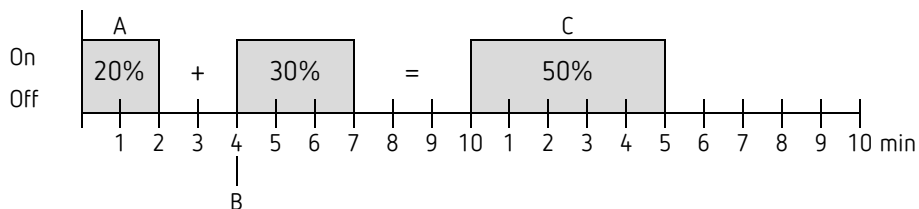

i If the rated switch-on time for the current cycle has already exceeded while receiving the new actuating value, the output is immediately switched off and the new actuating value is executed during the next cycle.

Example 2: The last control variable was 50% (A)
 A new actuating value of 30% is received during the cycle (B).
 The output is switched off after completing 30% of the PWM cycle and thus the new control variable is executed.

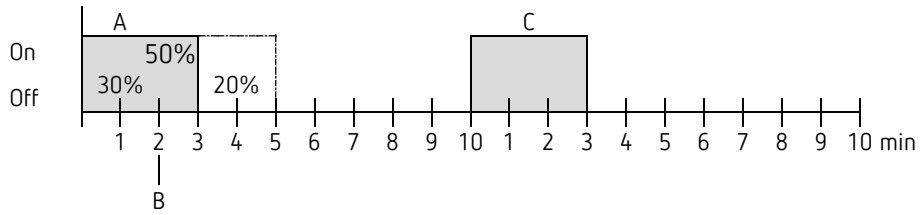

7.9 Operating mode as scene (RTC)

7.9.1 Principle

The current operating mode can be saved via an object with the scene functions and restored later at any time.

The current operating mode is allocated to the appropriate scene number when a scene is saved.

The previously saved operating mode is reactivated when a scene number is called.


This allows the device to be easily associated to each chosen user scene.

The scenes are permanently stored and remain intact even after the application has been downloaded again.

In order to save or call up the scene, the respective code is sent to the object *Operating mode as seen*.

Scene	Call up		Save		Scene	Call up		Save	
	Hex	Dec.	Hex	Dec.		Hex	Dec.	Hex	Dec.
1	\$00	0	\$80	128	33	\$20	32	\$A0	160
2	\$01	1	\$81	129	34	\$21	33	\$A1	161
3	\$02	2	\$82	130	35	\$22	34	\$A2	162
4	\$03	3	\$83	131	36	\$23	35	\$A3	163
5	\$04	4	\$84	132	37	\$24	36	\$A4	164
6	\$05	5	\$85	133	38	\$25	37	\$A5	165
7	\$06	6	\$86	134	39	\$26	38	\$A6	166
8	\$07	7	\$87	135	40	\$27	39	\$A7	167
9	\$08	8	\$88	136	41	\$28	40	\$A8	168
10	\$09	9	\$89	137	42	\$29	41	\$A9	169
11	\$0A	10	\$8A	138	43	\$2A	42	\$AA	170
12	\$0B	11	\$8B	139	44	\$2B	43	\$AB	171
13	\$0C	12	\$8C	140	45	\$2C	44	\$AC	172
14	\$0D	13	\$8D	141	46	\$2D	45	\$AD	173
15	\$0E	14	\$8E	142	47	\$2E	46	\$AE	174
16	\$0F	15	\$8F	143	48	\$2F	47	\$AF	175
17	\$10	16	\$90	144	49	\$30	48	\$B0	176
18	\$11	17	\$91	145	50	\$31	49	\$B1	177
19	\$12	18	\$92	146	51	\$32	50	\$B2	178
20	\$13	19	\$93	147	52	\$33	51	\$B3	179
21	\$14	20	\$94	148	53	\$34	52	\$B4	180
22	\$15	21	\$95	149	54	\$35	53	\$B5	181
23	\$16	22	\$96	150	55	\$36	54	\$B6	182
24	\$17	23	\$97	151	56	\$37	55	\$B7	183
25	\$18	24	\$98	152	57	\$38	56	\$B8	184
26	\$19	25	\$99	153	58	\$39	57	\$B9	185
27	\$1A	26	\$9A	154	59	\$3A	58	\$BA	186
28	\$1B	27	\$9B	155	60	\$3B	59	\$BB	187
29	\$1C	28	\$9C	156	61	\$3C	60	\$BC	188
30	\$1D	29	\$9D	157	62	\$3D	61	\$BD	189
31	\$1E	30	\$9E	158	63	\$3E	62	\$BE	190
32	\$1F	31	\$9F	159	64	\$3F	63	\$BF	191

7.10 Setpoint shift

 The set point correction enables a *dynamic adjustment* of the setpoint to the outdoor temperature when cooling.

This function prevents too great a temperature deviation between the outside area and the cooled interior with high outside temperatures.

If the outdoor temperature exceeds a set threshold, adjustment is activated and a corresponding increase of the setpoint is calculated.

The current outside temperature for calculating the correction is received via object *Outside temperature*.

The set point correction is activated on the RTC **Settings** parameter page via the *Use set point correction with high outside temperatures* parameter and is set on the **Set point adjustment** parameter page.

The set point correction is internally linked to the RTC, so no bus connection is required.

7.10.1 Format of set point correction: Relative

Set point correction is sent as a temperature difference.
 Below the set point correction threshold (*set point correction from*) the value 0 is sent.

If the set point correction threshold (*set point correction from*) is exceeded, the setpoint will be increased linearly depending on the change of the outside temperature.

Example: Calculated correction value

Set point correction from: 26 °C

Outdoor temp.	Adjustment							Correction value
	1 K/1 K	1 K/2 K	1 K/3 K	1 K/4 K	1 K/5 K	1 K/6 K	1 K/7 K	
20 °C	0 K	0 K	0 K	0 K	0 K	0 K	0 K	
21 °C	0 K	0 K	0 K	0 K	0 K	0 K	0 K	
22 °C	0 K	0 K	0 K	0 K	0 K	0 K	0 K	
23 °C	0 K	0 K	0 K	0 K	0 K	0 K	0 K	
24 °C	0 K	0 K	0 K	0 K	0 K	0 K	0 K	
25 °C	0 K	0 K	0 K	0 K	0 K	0 K	0 K	
26 °C	1 K							
27 °C	2 K	1 K						
28 °C	3 K	1 K	1 K					
29 °C	4 K	2 K	1 K	1 K				
30 °C	5 K	2 K	1 K	1 K	1 K			
31 °C	6 K	3 K	2 K	1 K	1 K	1 K		
32 °C	7 K	3 K	2 K	1 K	1 K	1 K	1 K	
33 °C	8 K	4 K	2 K	2 K	1 K	1 K	1 K	
34 °C	9 K	4 K	3 K	2 K	1 K	1 K	1 K	
35 °C	10 K	5 K	3 K	2 K	2 K	1 K	1 K	
36 °C	11 K	5 K	3 K	2 K	2 K	1 K	1 K	
37 °C	12 K	6 K	4 K	3 K	2 K	2 K	1 K	
38 °C	13 K	6 K	4 K	3 K	2 K	2 K	1 K	
39 °C	14 K	7 K	4 K	3 K	2 K	2 K	2 K	
40 °C	15 K	7 K	5 K	3 K	3 K	2 K	2 K	

7.10.2 Format of set point correction: Absolute

Sends the corrected setpoint to the bus for additional room thermostats.

This setpoint is calculated from:

Base setpoint without correction + dead zone + adjustment.

Example: *Set point correction from: 25 °C, start setpoint: 20 °C, dead zone = 2 K*

Outdoor temp.	Adjustment							Setpoint
	1 K/1 K	1 K/2 K	1 K/3 K	1 K/4 K	1 K/5 K	1 K/6 K	1 K/7 K	
20	22.00	22.00	22.00	22.00	22.00	22.00	22.00	
21	22.00	22.00	22.00	22.00	22.00	22.00	22.00	
22	22.00	22.00	22.00	22.00	22.00	22.00	22.00	
23	22.00	22.00	22.00	22.00	22.00	22.00	22.00	
24	22.00	22.00	22.00	22.00	22.00	22.00	22.00	
25	23.00							
26	24.00	23.00						
27	25.00	24.00	23.00					
28	26.00	24.00	24.00	23.00				
29	27.00	25.00	24.00	24.00	23.00			
30	28.00	25.00	24.00	24.00	24.00	23.00		
31	29.00	26.00	25.00	24.00	24.00	24.00	23.00	
32	30.00	26.00	25.00	24.00	24.00	24.00	24.00	
33	31.00	27.00	25.00	25.00	24.00	24.00	24.00	
34	32.00	27.00	26.00	25.00	24.00	24.00	24.00	
35	33.00	28.00	26.00	25.00	25.00	24.00	24.00	
36	34.00	28.00	26.00	25.00	25.00	24.00	24.00	
37	35.00	29.00	27.00	26.00	25.00	25.00	24.00	
38	36.00	29.00	27.00	26.00	25.00	25.00	24.00	
39	37.00	30.00	27.00	26.00	25.00	25.00	25.00	
40	38.00	30.00	28.00	26.00	26.00	25.00	25.00	

7.11 Temperature control

7.11.1 Introduction

If the device is not configured as a switching controller, it can alternatively be configured as a P or as a PI controller, whereby PI control is preferable.

With the proportional controller (P controller), the actuating value is statically adjusted to the control deviation.

The proportional integral controller (PI controller) is far more flexible, i.e. it controls dynamically, i.e. more quickly and more accurately.

To explain the function of both temperature controls, the following example compares the room to be heated with a vessel

The filling level of the vessel denotes the room temperature.

The water feed stands for the radiator output.

The heat losses of the room are shown by a discharge.

In our example, the maximum feed is assumed at 4 litres per minute and at the same time is the maximum heat output of the radiator.

This maximum output is achieved with an actuating value of 100%.

Accordingly, with an actuating value of 50% only half of the water volume, i.e. 2 litres per minute, would flow into our vessel.

The bandwidth is 4 l.

This means, the controller will control at 100%, as long as the actual value will be smaller or equal $(21 \text{ l} - 4 \text{ l}) = 17 \text{ l}$.

Task:

Desired filling volume:

21 litres (= setpoint)

When should the feed be reduced, in order to prevent an overflow? :


4 l below the desired filling volume, i.e. at $21 \text{ l} - 4 \text{ l} = 17 \text{ l}$ (= bandwidth)

Original filling volume

15 l (=actual value)

The losses are 1 l/minute

7.11.2 Response of the P controller

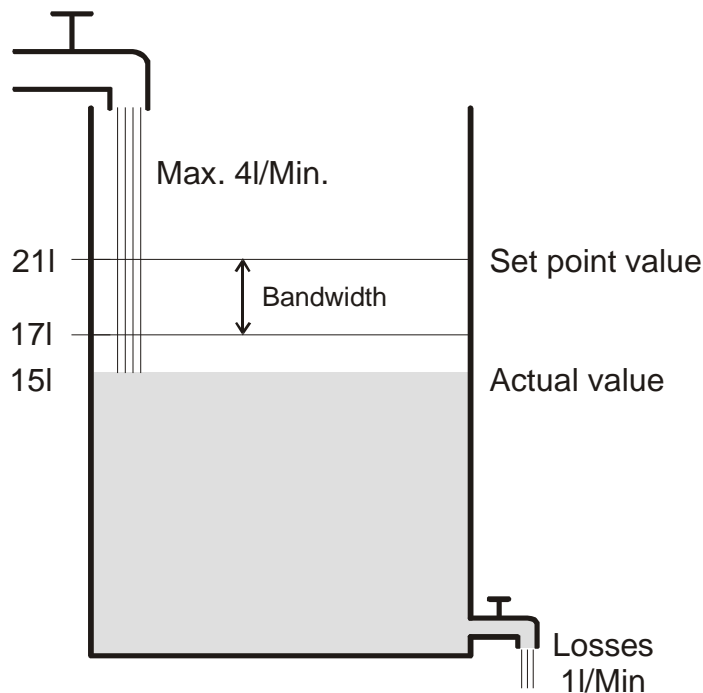

If the filling quantity is 15 l, there is a control deviation of $21\text{ l} - 15\text{ l} = 6\text{ l}$
 As our actual value lies outside the bandwidth, the control will operate the feed at 100%,
 i.e. with 4 l/minute.

The feed quantity (= actuating value) is calculated from the control deviation
 (setpoint - actual value) und the bandwidth.

$$\text{Actuating value} = (\text{control deviation} / \text{bandwidth}) \times 100$$

The following table illustrates the behaviour and also the limits of the P controller.

Table 1

Filling level	Actuating value	Feed	Losses	Increase of filling level
15 l	100%	4 l/min	1 l/min	3 l/min
19 l	50%	2 l/min		1 l/min
20 l	25%	1 l/min		0 l/min

The last line shows that the filling level cannot be increased any more, because the inlet feeds
 as much water as can be discharged by the losses.

The result is a permanent control deviation of 1 l. The setpoint can never be achieved.

If the losses were increased by 1 l, the permanent control deviation would be increased by the
 same amount, and the filling level would never exceed the 19 l mark.

In case of a room, this would mean that the control deviation increases with decreasing outdoor
 temperature.

P controller as temperature controller

Just as in the previous example, the P controller behaves in a heating control. The setpoint temperature (21 °C) can never be completely reached.

The permanent control deviation is increased the higher the heat losses, i.e. the colder the outdoor temperatures.

7.11.3 Response of the PI controller

In contrast to the pure P controller, the PI controller functions dynamically. With this type of controller, the actuating value remains unchanged, even at a constant deviation.

At the first moment, the PI controller sends the same actuating value as the P controller. However, this will be increased further the longer the setpoint will not be reached. This increase is time-controlled over the so-called integration time. During this calculation method, the actuating value will not be changed anymore when the setpoint equals the actual value. In our example, this results in the balance between feed and discharge.

-
- i A good control depends on the adjustment of bandwidth and integration time with the room to be heated.
 - The bandwidth influences the increment of the actuating value change:
 - Large bandwidth = finer increments for the actuating value change.
 - The integration time influences the response time to temperature changes:
 - Long integration time = slow response.
 - Poor adjustment can result in either the setpoint being exceeded (overshoot), or the controller taking too long to reach the setpoint.
-

The best results are generally achieved using the standard settings or with the settings via installation type.

7.12 Continuous and switching control

A switching (2 point) control recognises only 2 statuses, On or Off. A continuous control works with an actuating value between 0% and 100% and can thus exactly dose the energy input. This provides a pleasant and precise degree of control.

Table 2: Overview of control functions

Operating mode/stage	Type of control	Hysteresis
Heating	2-point/PI controller	positive
Cooling	2-point/PI controller	negative
Additional stage	2-point/P control	negative

7.13 Hysteresis

i Hysteresis determines the difference between a controller's switching on and off temperature.

It can be both positive and negative.

With a combination of heating and cooling control, it influences the amount of the dead zone.

Without hysteresis, the controller would activate and deactivate continuously, as long as the temperature lies within the range of the setpoint.

7.13.1 Negative hysteresis:

Heating: Is provided until the setpoint has been reached.

Afterwards, the heating is only switched on again when the temperature falls below the "Hysteresis set point value" threshold.

Cooling: Lasts until the "Hysteresis setpoint" threshold has been achieved.

Afterwards, it is only switched on again when the temperature rises above the setpoint.

Example of additional heating stage:

Additional stage with a setpoint of 20 °C, hysteresis 0.5 K and starting temperature 19 °C.

The additional stage is switched on and does not switch off again until the setpoint (20 °) is reached.

The temperature decreases, and the additional stage only switches on at 20 °C-0.5 K= 19.5 °C.

Cooling example:

Cooling with setpoint of 25 °C, hysteresis = 1 °C and ambient temperature 27 °C.

The cooling is switched on and switches off again only when a temperature of 24 °C (25 °C – 1 °C) is achieved.

It switches on again when the temperature rises above 25 °C.

7.13.2 Positive hysteresis

Heating lasts until the temperature reaches the "setpoint + hysteresis " threshold.

The heating is only switched on again when the temperature falls below the set point value.

Heating example:

Heating with setpoint 20 °C, hysteresis = 1 °C and ambient temperature 19 °C.

The heating is switched on and only switches off again when a temperature of 21 °C (= 20 °C + 1 °C) is achieved.

It switches on again when the temperature falls below 20 °C.


7.14 Dead zone

i The dead zone is a buffer area between heating and cooling mode. Within this dead zone, neither heating nor cooling occurs.

Without this buffer area, the system would permanently switch between heating and cooling. As soon as the setpoint was fallen below, the heating would be activated. After hardly reaching the setpoint, the cooling would immediately start, the temperature would fall below the setpoint and switch on the heating again.


Depending on the type of control, the dead zone can be extended by the value of the hysteresis.

Case 1: Heating and cooling with continuous control

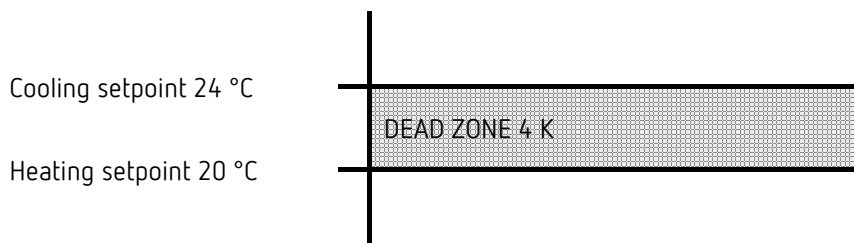


The dead zone (4 K) is not affected.

Case 2: Heating with 2-point control and cooling with continuous control

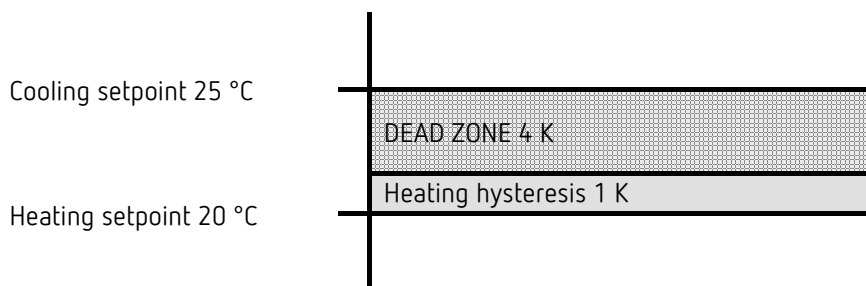


The dead zone (4 K) is increased by the value of the hysteresis (1K) and offsets the cooling set point value to 25 °C.

Case 3: Heating with 2-point control and cooling with continuous control

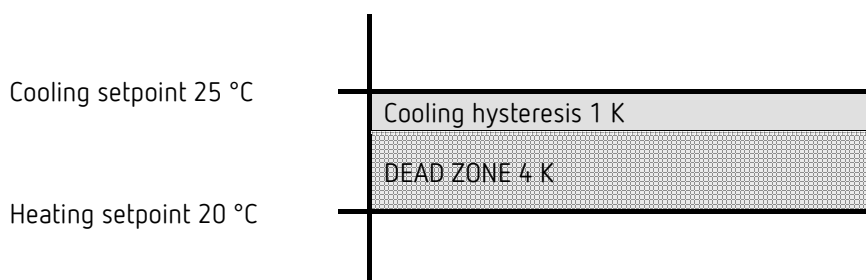

The dead zone (4 K) is increased by the value of the hysteresis (1K) and offsets the cooling set point value to 25 °C.

Case 4: Heating and cooling with 2-point control

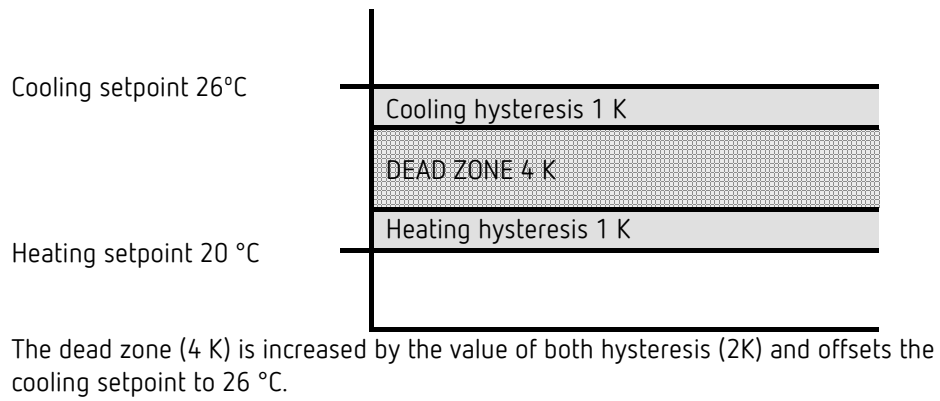

7.15 Operating mode selection

7.15.1 Priorities for operating mode selection

The operation mode selection between comfort, standby, night operation and frost protection can happen in 3 different ways:

- Via the object *Operating mode preset*
- Manually at the device
- Via scene controls

All 3 possibilities are all on the same priority level.



In principle the following applies: The last instruction overwrites the previous one.

Exception: Frost mode via window contact has priority over all other operating modes.

Upon selection of the *presence button* parameter, the following also applies:

If a new operating mode is received on the object with the presence object set (*operating mode preset*), it is accepted and the presence object is reset (only with presence button).

Reception of the same operating mode as prior to the presence status (e.g. via cycl. sending) is ignored.

If the *presence object* is set during night/frost mode, it is reset after the configured comfort extension has expired (see below).

If the *presence object* is set during standby mode, the comfort operating mode is accepted without time restriction.

7.15.2 Determining the current operation mode

The current setpoint can be adjusted to the relevant requirements via the choice of operating mode.

The operating mode can be specified via the objects *operating mode preset*, *presence*, and *window setting*.

For this, there are two methods:

7.15.2.1 New operating modes

If *objects for determining the operating mode* = *New:...* was selected on the **Settings** parameter page, then the current operating mode can be defined as follows:

Obj. Operating mode preset	Obj. Presence	Obj. Window position	Obj. Current operating mode
any	any	1	Frost/heat protection
any	1	0	Comfort
Comfort	0	0	Comfort
Standby	0	0	Standby
Night	0	0	Night
Frost/heat protection	0	0	Frost/heat protection

Typical application:

In the morning, the *Operating mode* object activates "Standby" or "Comfort", and in the evening, "Night" is activated via a time switch (e.g. TR 648).

During holiday periods, frost/heat protection is selected via another channel, also via the same object.

Object *Presence* is linked to a presence detector. If presence is detected, the controller switches to comfort operating mode (see table).


Object *Window status* is linked to a window contact via the bus (external input).

As soon as a window is opened, the controller switches to frost protection operating mode.


Determining the operating mode when using a presence detector

Operating mode guideline via..

- Button
- Object *Operating mode preset*
- Scene
- Operating mode after download



Results in..

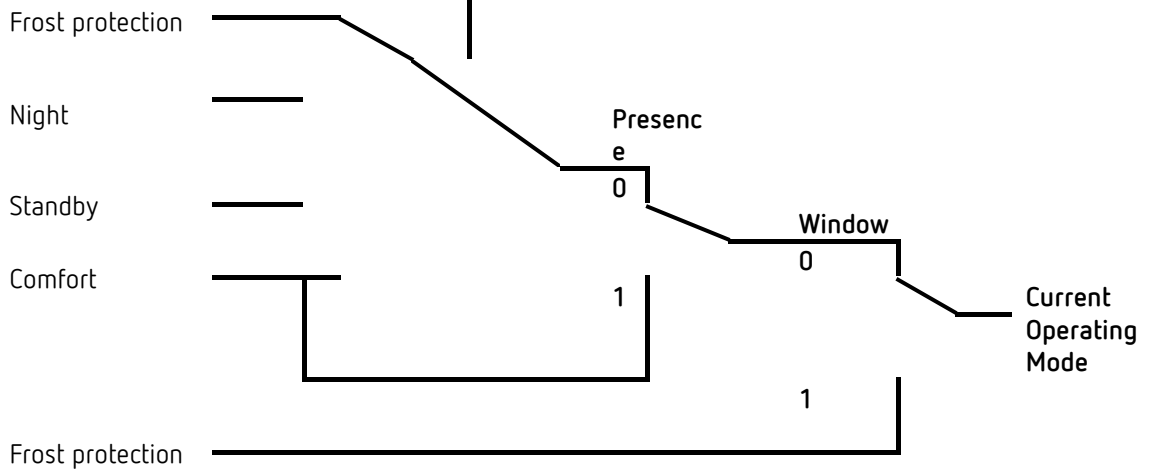

7.15.2.2 Old operating modes

If on the *Settings* parameter page *objects for determining the operating mode = Old:... was selected*, then the current operating mode can be defined as follows:

Obj. Night/standby	Obj. Comfort	Obj. Frost/heat protection	Obj. Current operating mode
any	any	1	Frost/heat protection
any	1	0	Comfort
Standby	0	0	Standby
Night	0	0	Night


Typical application:

In the morning, "standby" operating mode, and in the evenings "night" operating mode is activated via the object by a time switch.

In holiday periods, frost/heat protection is selected on another channel via the object.

The object *Comfort* is linked with a presence detector. If presence is detected, the controller switches to comfort operating mode (see table).

The object *Frost protection* is linked with a window contact: As soon as a window is opened, the controller switches to frost protection mode.

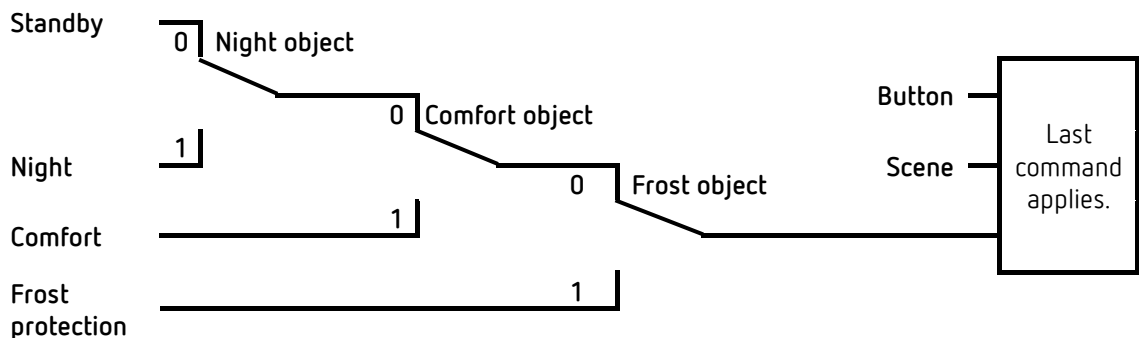

The old method has 2 disadvantages over the new method:

To switch from Comfort to Night operating mode, 2 telegrams (2 time switch channels if necessary) are required:

The object *Comfort* must be set to "0", and object *Night/standby* to "1".

If the window is opened and then closed again during periods when "Frost/heat protection" is selected via the time switch, the "Frost/heat protection" mode is cleared.

7.16 Determination of the setpoint

7.16.1 Setpoint calculation in heating mode

See also: *Base setpoint and current setpoint*

Current setpoint during heating:

Operating Mode	Current setpoint
Comfort	Base setpoint +/- set point offset
Standby	<i>Base setpoint +/- set point offset – reduction in standby mode</i>
Night	<i>Base setpoint +/- set point offset – reduction in standby mode</i>
Frost/heat protection	configured <i>setpoint for frost protection mode</i>

Example: Heating in comfort mode.

Parameter page	Parameter	Setting
Setpoints	<i>Base setpoint after reset</i>	21 °C
	<i>Reduction in standby mode (during heating)</i>	2 K
Heating setpoints	<i>Maximum valid set point offset</i>	+/- 2 K

The setpoint was previously increased by 1 K using the + button.

Calculation:

$$\begin{aligned}
 \text{Current setpoint} &= \text{base setpoint} + \text{set point offset} \\
 &= 21\text{ °C} + 1\text{ K} \\
 &= 22\text{ °C}
 \end{aligned}$$

If operation is switched to standby mode, the current setpoint is calculated as follows:

$$\begin{aligned}
 \text{Current set point} &= \text{base setpoint} + \text{set point offset} - \text{reduction in standby mode} \\
 &= 21\text{ °C} + 1\text{ K} - 2\text{ K} \\
 &= 20\text{ °C}
 \end{aligned}$$

7.16.2 Setpoint calculation in cooling mode

Current setpoint during cooling:

Operating Mode	Current setpoint
Comfort	Base setpoint + set point offset + dead zone
Standby	Base setpoint + set point offset + dead zone + increase in standby mode
Night	Base setpoint + set point offset + dead zone + increase in night mode
Frost/heat protection	configured setpoint for heat protection mode

Example: Cooling in comfort operating mode.

The room temperature is too high, the controller has switched to cooling mode

Parameter page	Parameter	Setting
Heating setpoints	<i>Maximum valid set point offset</i>	+/- 2 K
	<i>Base setpoint after loading the application</i>	21 °C
Cooling setpoints	<i>Dead zone between heating and cooling</i>	2 K
	<i>Increasing in standby mode (during cooling)</i>	2 K

The setpoint was previously lowered by 1 K on the device.

Calculation:

$$\begin{aligned}
 \text{Current setpoint} &= \text{base setpoint} + \text{set point offset} + \text{dead zone} \\
 &= 21 \text{ °C} - 1 \text{ K} + 2 \text{ K} \\
 &= 22 \text{ °C}
 \end{aligned}$$

Changing to standby mode causes a further increase in the setpoint (energy saving), resulting in the following setpoint.

$$\begin{aligned}
 \text{Setpoint} &= \text{base setpoint} + \text{set point offset} + \text{dead zone} + \text{increase in standby mode} \\
 &= 21 \text{ °C} - 1 \text{ K} + 2 \text{ K} + 2 \text{ K} \\
 &= 24 \text{ °C}
 \end{aligned}$$

7.17 Set point offset

With this function, the user can increase or reduce the room temperature individually, as desired.

The current setpoint can either be offset via the object *manual set point offset*, or via the rotary control.⁵⁵

See *Parameter: Rotary control function*.⁵⁶

The offset limits are defined on the **Setpoints** parameter page via the *Maximum valid setpoint offset* parameter.

The offset always refers to the set base setpoint and not to the current setpoint.

Example⁵⁷ Base setpoint of 21°C, *function of the rotary control = base setpoint*:

If the value of +2 K is received, the new setpoint is calculated as follows:

21 °C + 2 K = 23 °C.

In order to afterwards take the setpoint to 22 °C, the difference to the set base setpoint (here 21 °C at the rotary control) is resent to the object, in this case 1 K (21 °C + 1 K = 22 °C).

See object *Manual set point offset/set point offset at rotary control*.

⁵⁵ Only Amun 716 S

⁵⁶ Only Amun 716 S

⁵⁷ Only Amun 716 S

7.18 Base setpoint and current setpoint

The *base setpoint* is the standard temperature for the comfort mode and the reference temperature for reduction in standby and night modes.

The base setpoint can be defined directly at the rotary control⁵⁸, or via the object base setpoint (see parameter *function of the rotary control*⁵⁹).

The configured base setpoint (see *base setpoint after loading application*) is stored in the object *base setpoint* and can be changed any time via the bus by sending a new value to this object (only when *function of the rotary control* = *manual offset*).

After reset (restoration of the bus supply), the previously used base setpoint will be restored.

The *current setpoint* is the value that actually is used for control. It is the result of all reductions or increases associated with the operating mode and control function.

Example⁶⁰: At a base setpoint of 22 °C and a reduction in night mode of 4 K, the current setpoint (in night mode) is: 22 °C - 4 K = 18 °C. During the day (in comfort mode) the current setpoint is 22 °C (in heating mode).

The formation of the current setpoint on the basis of the basic setpoint can be observed in the block diagram on the next page:

The base setpoint on the left is specified via object, or set on the device.

The current setpoint is on the right, i.e. the value upon which the room temperature is effectively controlled.

As you can see in the block diagram, the current setpoint depends on the operating mode (5) and the selected control function (4).

The base setpoint limits (2) prevent an incorrect base setpoint from being specified at the object. These are the following parameters:

- *Minimum valid base setpoint*
- *Maximum valid base setpoint*

If the setpoint is outside the configured values for frost and heat protection, because of a set point offset, it is restricted to these values by the safety limits (11).

⁵⁸ Only Amun 716 S

⁵⁹ Only Amun 716 S

⁶⁰ Only Amun 716 S

7.19 CO₂ calibration

The CO₂ measurement value can be corrected either as an offset via object 84 or with a reference value via object 85.

EXAMPLE:

Amun 716 S sends a value of 500 ppm.

A reference instrument reports a CO₂ value of 450 ppm, i.e. a difference of -50 ppm must be corrected.

This leads to 2 possibilities:

- Send -50 to object 84 (DPT9.* 2 byte floating-point number).
- Send 500 to object 85 (DPT9.008).

The offset value remains active after reset.

The current offset value can be read out via the bus at any time.

i If the resulting CO₂ value is less than 400 ppm when setting the offset, the offset value will be adjusted to result in a CO₂ value of 400 ppm.⁶¹

i By sending zero to one of the two objects, the offset will be set to 0. The same applies when performing a fresh air adjustment or a KNX master reset.

i This function is available from application programme version 3.1. Only for devices manufactured as of 2113, firmware version 3.0.1 (18 01).

7.20 Comparator

This function can be used to compare different values.

The resulting final value is sent out via object.

For each of the three inputs, a control value (CO₂, humidity and RTC) or an input object (DPT5.1) can be configured.

The output value can then be the minimum value, the maximum value or the calculated mean value of all active inputs. If all three inputs are not active, the comparator is also not active.

The comparator does not send until all configured control values are available, as it can take a little longer until the first CO₂ value is reported by the measuring module.

If a control value (CO₂ ventilation or humidity ventilation) is blocked via an object, it will still be evaluated.

⁶¹ In 2013, an average concentration of 400 ppm was determined in the atmosphere. Normally, this value can be taken as a reference value.

7.21 Firmware version

*Information for the advanced.*⁶²

If the *Firmware Version* diagnostic object is read out⁶³, the version number is displayed in the ETS as DPT217.001 in the form of 2 hexadecimal numbers.

DPT	Info
217.001 DPT Version	18 01

The number 18 01, for example, corresponds to the version number V3.0.1 and is composed as follows:

A 16-bit bit pattern:

Magic number	Version number	Revision number
U U U U U	U U U U U	U U U U U

Contains the 3 digits of the version number

Magic number	Version number	Revision number
U U U U U	U U U U U	U U U U U
3	0	1

16-bit bit pattern

0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	1
---	---	---	---	---	---	---	---	---	---	---	---	---	---	---	---

If the 16-bit bit pattern is separated in the middle, 2 hexadecimal numbers result. They are displayed in this form by the ETS when reading out the group address.

0	0	0	1	1	0	0	0	0	0	0	0	0	0	0	1
1	8	0	1												

Result:

V3.0.1 => 18 01


The first subsequent version numbers would thus look like this:

ETS	Firmware version
18 02	3.0.2
18 03	3.0.3
18 04	3.0.4
18 05	3.0.5

⁶² Requires knowledge of binary and hexadecimal number systems.

⁶³ Diagnosis menu/ group monitor

7.21.1 Setpoint calculation

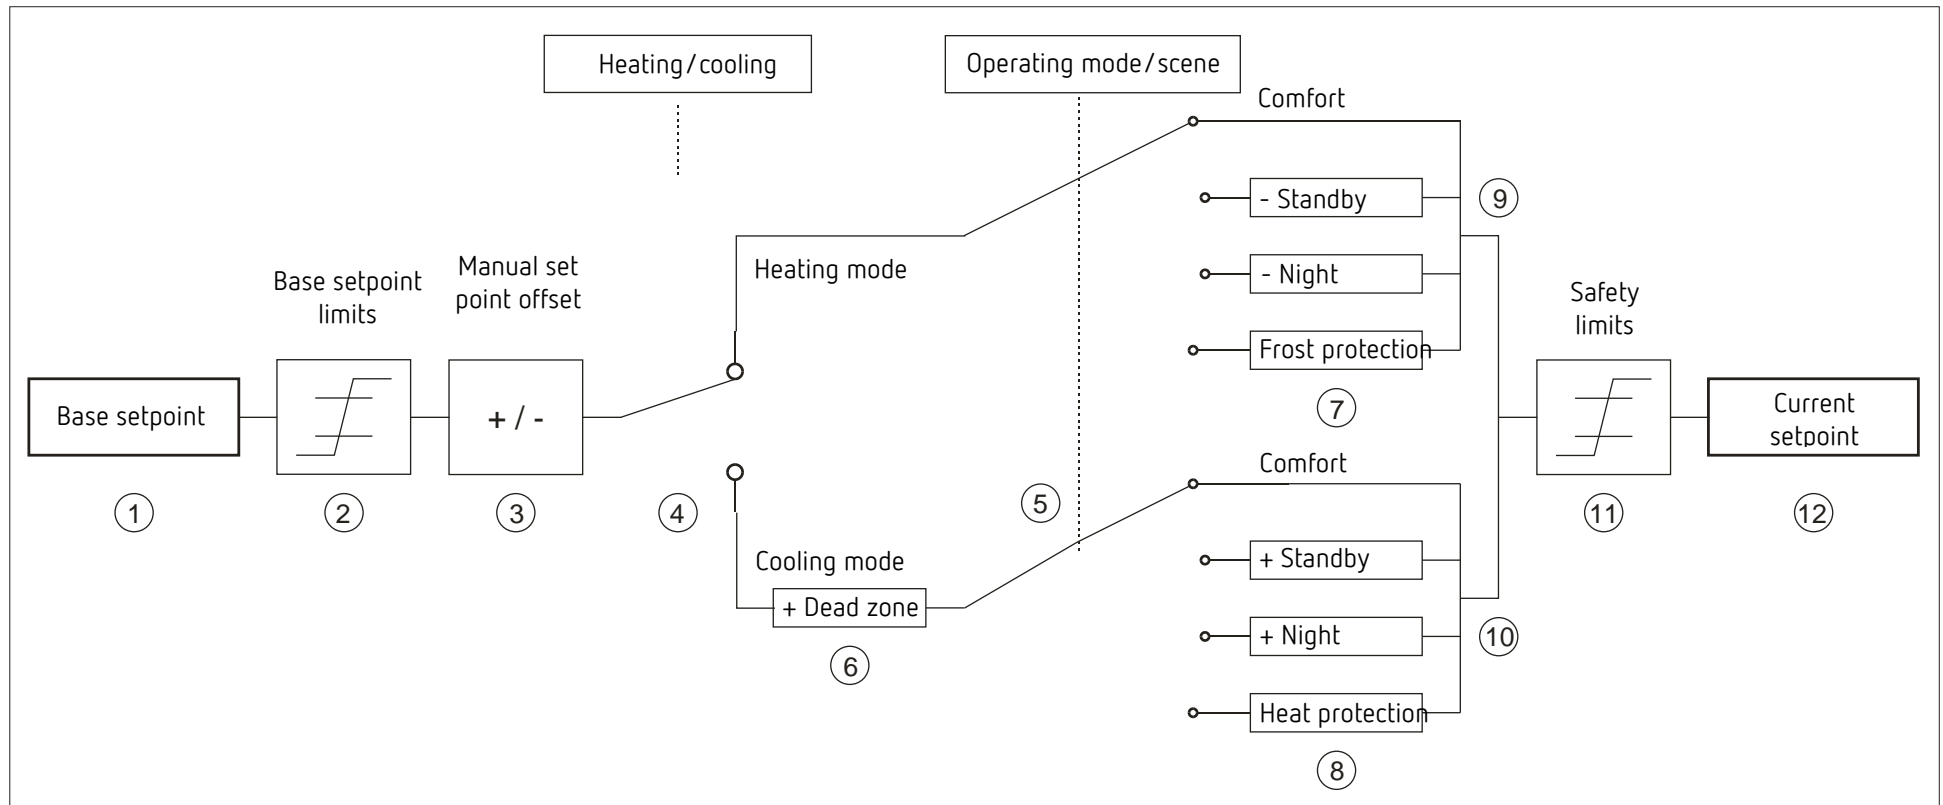

- 1 Preset base setpoint from object or rotary control
- 2 Max. and min. valid base setpoints
- 3 Manual set point offset
- 4 Change between heating and cooling: Automatically or via object
- 5 Selection of operating mode, by operator, object, switching program or scene.
- 6 The setpoint is increased in cooling mode by the amount of the dead zone

- 7 The setpoint is replaced by the setpoint for frost protection mode
- 8 The setpoint is replaced by the setpoint for heat protection mode
- 9 Setpoint after reductions caused by the operating mode
- 10 Setpoint after increases caused by the operating mode
- 11 The limits for frost and heat protection must be adhered to
- 12 Current setpoint after increases, reductions and limits caused by the operation