

LUXORliving P640

Item no.: 4800990

theben

Home and Building control
LUXORliving

Description

- 640 mA supply voltage LUXORliving
- 30 V DC auxiliary supply
- Power-supplying and monitoring of the system voltage
- Download of the installation software LUXORplug at <https://luxorliving.de/luxorplug>



Technical data

LUXORliving P640	
Operating voltage	230 – 240 V AC
Stand-by consumption	<0.8 W
Width	4 modules
Installation type	DIN rail

LUXORliving P640	
Mains failure bridging time	min.100 ms
Protection class	II according to EN 60 730-1
Type of protection	IP 20

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800990


The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

LUXORliving P640

Item no.: 4800990

theben

Scale drawings

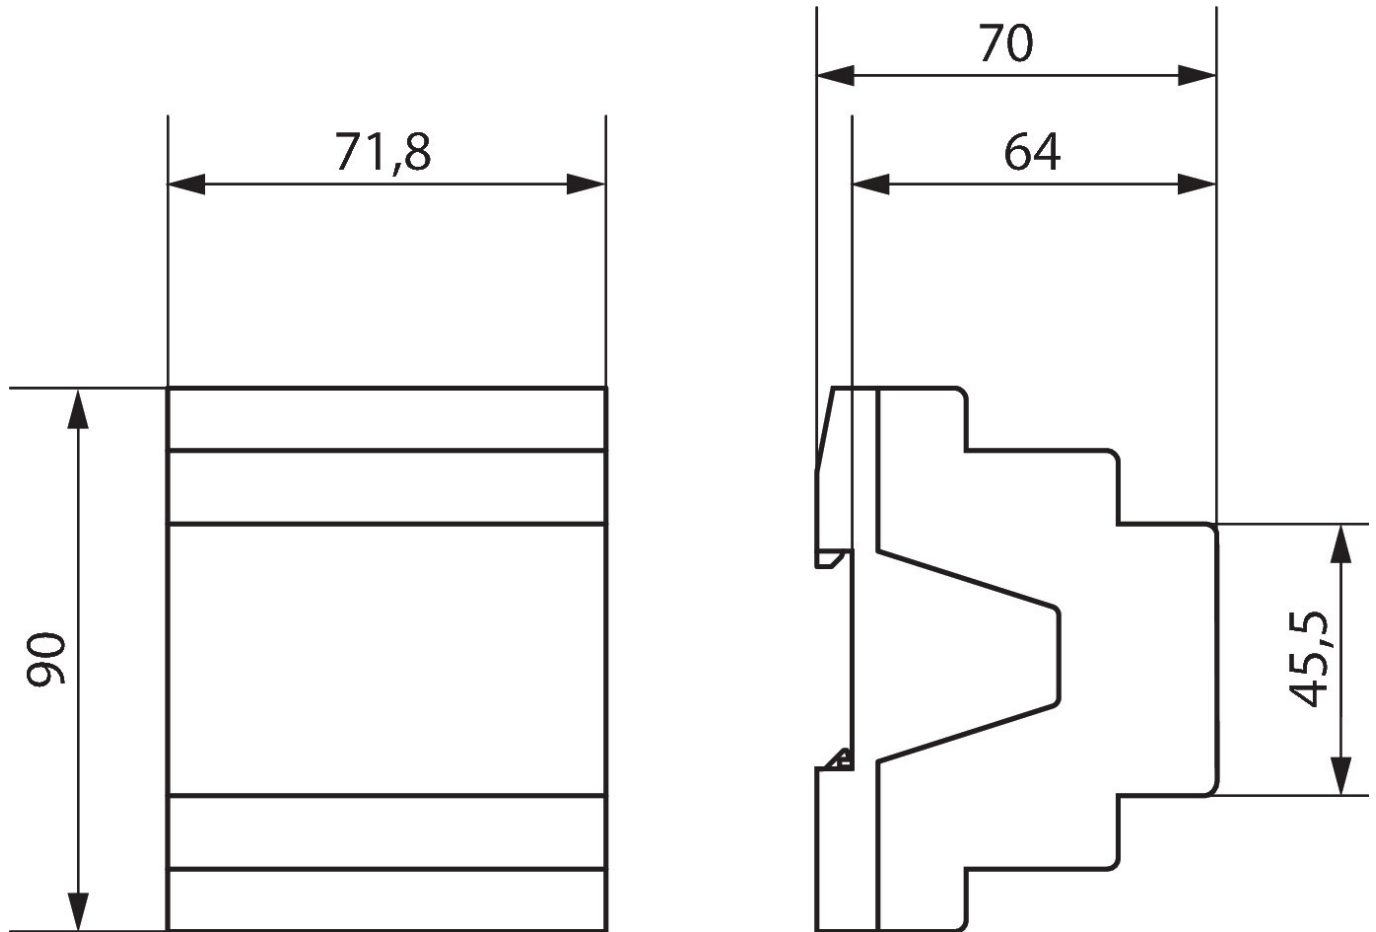

Subject to technical changes and misprints

additional information at: www.theben.de/product/4800990

The load data are determined with exemplary selected illuminants and are therefore typical data due to the large number of available products.

31/08/2023

Page 2 of 2