

Solar light

# XSolar SOL-0 Sensor

Silver

EAN 4007841 052652



365TAGE  
LICHT

Light 365 days of the year



3000K  
warm-white



infrared sensor  
360°



max. radius 6 m



IP44



2 lux



soft light start

3 JAHRE  
HERSTELLER  
GARANTIE

manufacturer's  
warranty  
steinel.de/garantie



CE



TüV Nord GS

## Function description

Lets the sun shine everywhere. No connection to the power supply, no energy costs and yet 365 days of light a year. The sensor-switched outdoor light with solar panel in monocrystalline glass as well as extra powerful lithium-iron phosphate rechargeable batteries make it possible. With 360° infrared mini sensor, 6 m reach, 140 lm luminous flux and patented, intelligent microprocessor control system. Includes night-light function and soft light start. Available in silver and anthracite.

## Technical specifications

Dimensions (L x W x H)	91 x 242 x 53 mm
Sensor Technology	passive infrared
Output	1,5 W
Power supply, detail	Solar supply, no mains power required, 2 x Lithium-iron-phosphate rechargeable battery 2000 mAh
Luminous flux	140 lm
Colour temperature	3000 K
Colour Rendering Index CRI	80-89
With lamp	Yes, STEINEL LED system
Lamp	LED cannot be replaced
LED life expectancy (max. °C)	50000 h
LED cooling system	Passive Thermo Control
With motion detector	Yes
Detection angle	360 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	Ø 4 m (13 m <sup>2</sup> )
Reach, tangential	Ø 14 m (154 m <sup>2</sup> )

Photo-cell controller	Yes
Twilight setting	2 lx
Time setting	10 s – 1 Min.
Basic light level function	Yes
Basic light level function time	all night
Functions	Motions sensor
Soft light start	Yes
Impact resistance	IK03
IP-rating	IP44
Protection class	III
Ambient temperature	-20 – 40 °C
Housing material	Aluminium
Cover material	Plastic, structured
Manufacturer's Warranty	3 years
Version	Silver
PU1, EAN	4007841052652

Solar light


# XSolar SOL-0 Sensor

Silver


EAN 4007841 052652



## Detection Zone

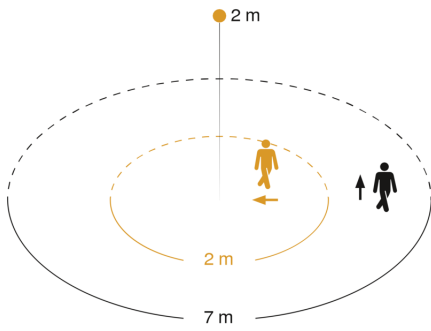

## Dimension Drawing

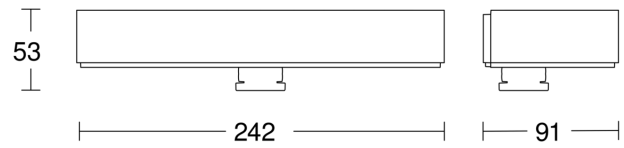

Mögliche Montagehöhe: 1,80 m – 2,50 m

Orange: radial

Schwarz: tangential