

Motion detector

# IS 2360 DE ECO

EAN 4007841 034733

**STEINEL**<sup>®</sup>  
PROFESSIONAL



infrared sensor  
360°



max. 4 m

1000w

1000 W max.



IP54



2 - 2000 lux



8 sec - 35 min



energy saving

5 JAHRE  
HERSTELLER  
GARANTIE

manufacturer's  
warranty  
steinel-professional.de/garantie



CE

## Function description

Intelligent technology for installation. Infrared wall sensor IS 2360 DE ECO, for indoors and out, ideal for installing in projecting roofs and suspended ceilings, 360° angle of coverage, reach can be set up to 4 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

## Technical specifications

Type	Motion detectors
Mains power supply	220 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Application, place	outdoors, Indoors
Application, place, room	corridor, aisle, side room
Installation site	ceiling
Type of installation	Installation
Electronic scalability	No
Mechanical scalability	No
Mounting height	2,2 – 4 m
Optimum mounting height	2,5 m
Detection angle	360 °
Angle of aperture	180 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	Ø 4 m (13 m <sup>2</sup> )
Twilight setting TEACH	No

Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Switching output 1, number of LEDs / fluorescent lamps	6 pcs.
Constant-lighting control	No
Basic light level function	No
Settings via	Potentiometers
Interconnection	No
Type of interconnection	Master/master
IP rating	IP54
Material	Plastic
Ambient temperature	-20 – 40 °C
Colour	white
Colour, RAL	9010
IDs, certificates	VDE
Manufacturer's Warranty	5 years
PU1, EAN	4007841034733


Motion detector

# IS 2360 DE ECO

EAN 4007841 034733

**STEINEL**<sup>®</sup>  
PROFESSIONAL

## Detection Zone

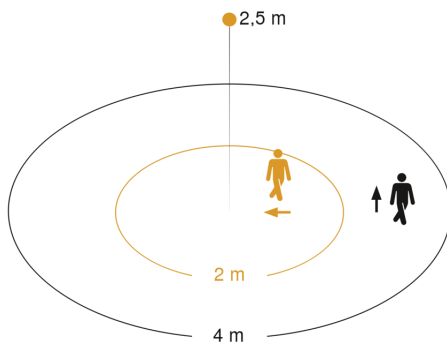

Mögliche Montagehöhe: 2,20 m – 4,00 m  
Orange: radial  
Schwarz: tangential

## Circuit diagram

