

IS 3360

V3 KNX - concealed, rd. white

EAN 4007841 058197



infrared sensor
360°



max. 20 m



KNX



IP54



2 - 1000 lux



1 - 255 min



ideal 2,5 - 4 m

TEACH

Teach mode



energy saving

5 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

Function description

Higher, further, faster. Infrared motion detector IS 3360 for indoors and out, ideal for watching over high spaces and large areas, such as multi-storey and underground car parks, installation height up to 4 m, 360° angle of coverage, reach 20 m max. (tangential). Available either in round or square surface-mounted and concealed version.

IS 3360

V3 KNX - concealed, rd. white
EAN 4007841 058197

Technical specifications

Type	Motion and Presence Detector
Dimensions (Ø x H)	124 x 78 mm
Power supply, detail	KNX bus
Sensor Technology	passive infrared
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,50 – 4,00 m
Reach, radial	Ø 8 m (50 m ²)
Reach, tangential	Ø 40 m (1257 m ²)
Reach, presence	Ø 3 m (7 m ²)
Detection angle	360 °
Angle of aperture	180 °
Switching zones	1416 switching zones
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No

Accessories

EAN 4007841 593018	Service remote control RC6 KNX
EAN 4007841 009151	Remote control Smart Remote
EAN 4007841 592912	User remote control RC7 KNX
EAN 4007841 056742	Black cover for IR-sensors


Twilight setting TEACH	Yes
Twilight setting	2 – 1000 lx
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Photo-cell controller, Basic light level function, Light level, HVAC output, Constant-lighting control, Light output 2x, Presence output, Day / night function, Logic gate
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
Interconnection	Yes
Type of interconnection	Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	-20 – 50 °C
Application, room	production facilities, recreation room, changing room, function room / ancillary room, sports hall, reception / lobby, stairwell, WC / washroom, multi-storey / underground car park, warehouse, Indoors
Colour	white
Colour, RAL	9003
Manufacturer's Warranty	5 years
Version	KNX - concealed, rd. white
PU1, EAN	4007841058197

IS 3360

V3 KNX - concealed, rd. white

EAN 4007841 058197

Detection Zone

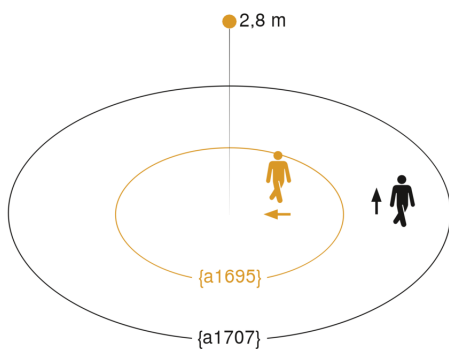

Mögliche Montagehöhe: 2,50 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

