

Description	Colour	Part number	EAN number
PD4-S-DAA4G-FC	white	92721	4007529927210
PD4-S-DAA4G-SM	white	92759	4007529927593



FC



SM

Accessory	Colour	Part number	EAN number
Wire basket BSK (Ø 200 x 90 mm)	white	92199	4007529921997


■ TECHNICAL DATA

Voltage:	22 V DC über DALI-Bus
Detection area:	360° Ø 24 m across Ø 8 m towards Ø 6.4 m seated
Range:	
Degree / class of protection:	IP20 / Class II / CE
Ambient temperature:	-25 °C to +50 °C
Housing:	Polycarbonate, UV-resistant
Pulse function:	pulse interval 30 seconds (in test mode 2 seconds during 3 minutes) up to 4 slave devices in combination with one PD4-M-DAA4G
Output voltage:	22 V DC


PRODUCT INFORMATION

- Slave device particularly for DALI compact system PD4-M-DAA4G
- For extension of the detection area of a master device PD4-M-DAA4G
- Trigger pulse to master device upon detected movement independent of the ambient light level
- Easy to mount
- Automatic test mode via master device
- Plug & Play – no parameterisation necessary
- Version for suspended ceilings
- Version for surface mounting


DIMENSIONS DRAWING

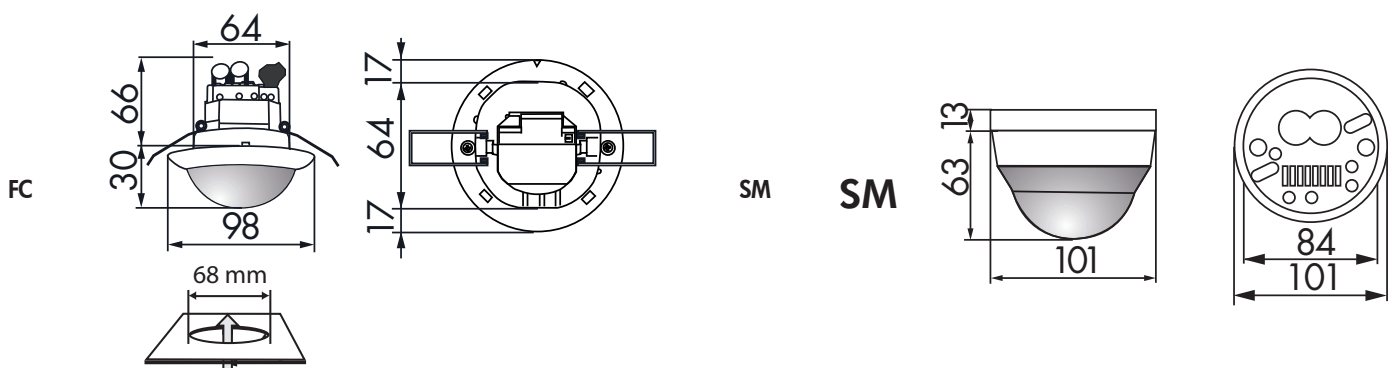

WIRING DIAGRAM

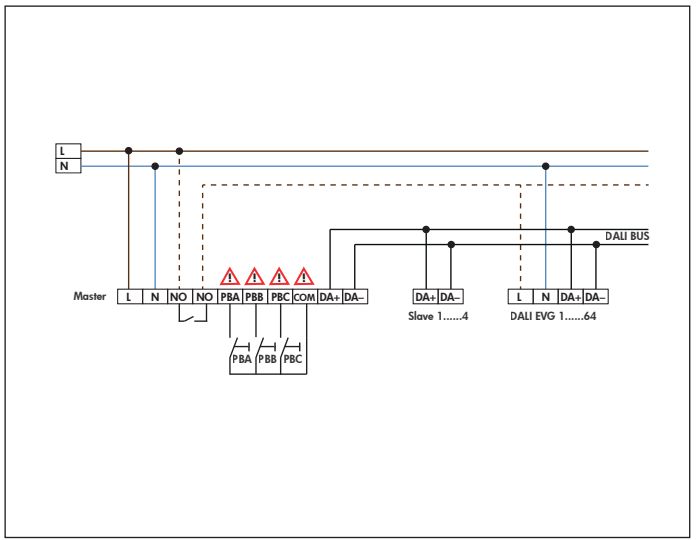

RANGE DIAGRAM

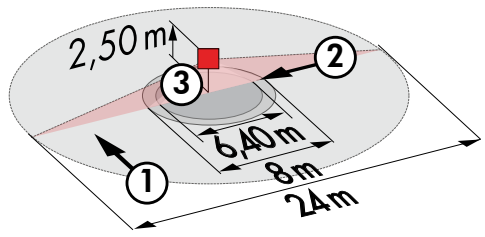

- ① Walking across
- ② Walking towards
- ③ Seated activity