RAMSES 722 S

Item no.: 7220801



Climate control Clock thermostats

Description

- Analogue clock thermostat with a low profile design for timedependent monitoring and control of room temperature
- Mains version
- Segment program disc with daily program
- Synchronous motor drive
- Normal and reduced temperature can be set separately
- Electronic temperature control
- Operating point and electronic recirculation are set from the front
- Party switch and program display
- Electronic temperature control
- Selector switch for operating mode: con-tinuous reduced temperature, continuous normal temperature, automatic mode, frost and plant protection +6 $^{\circ}\text{C}$





Technical data

	RAMSES 722 S
Operating voltage	230 V AC
Frequency	50 Hz
Type of contact	Changeover contact
Installation type	Wall installation
Program	Daily program
Switching capacity	6 A at 250 V AC, $\cos \varphi = 1$, 1 A at 250 V AC, $\cos \varphi = 0.6$
Switching differential	0.4 - 1.2 K
Switching output	Potential-free, not for SELV
Suitable for SELV	No

	RAMSES 722 S
Setting range temperature	10°C 30°C
Shortest switching times	15 min
Programmable every	15 min
Time accuracy at 25 °C	Synchronised with mains
Stand-by consumption	~1.3 W
Display	1 LED Heizen
Colour	White
Type of protection	IP 20
Protection class	II according to EN 60 730-1

Connection example






RAMSES 722 S

Item no.: 7220801



Scale drawings

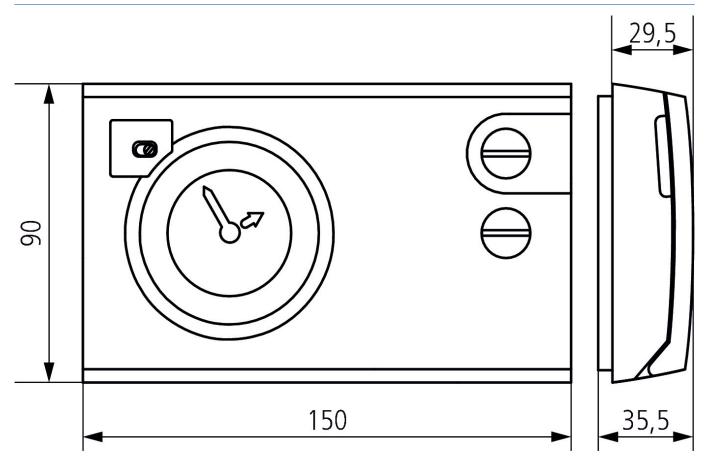

Accessories

Adapter RAMSES 72x/78x Item no.: 9070245



Actuator ALPHA 5 230 V Item no.: 9070441



Actuator ALPHA 5 24 V Item no.: 9070442

