

Motion detector

IS 360-1 DE

inox

EAN 4007841 034917

 steinel



infrared sensor
360°



max. 4 m

1000w

1000 W max.



IP54



2 - 2000 lux



8 sec - 35 min



ideal 2,2 m



energy saving

3 JAHRE
HERSTELLER
GARANTIE

manufacturer's
warranty
steinel.de/garantie



CE

Function description

Intelligent technology for installation. Infrared wall sensor IS 360-1 DE, for indoors and out, ideal for installing in projecting roofs and suspended ceilings, 360° angle of coverage, reach can be set up to 4 m, selectable time and twilight threshold, detection zone can be customised with shrouds.

Technical specifications

Type	Motion detectors
Dimensions (Ø x H)	78 x 89 mm
Mains power supply	230 – 240 V / 50 – 60 Hz
Sensor Technology	passive infrared
Application, place	Outdoors, Indoors
Application, room	outdoors, front door, all round the building, terrace / balcony, Indoors
Installation site	ceiling
Installation	Installation
Switching zones	304 switching zones
Electronic scalability	No
Mechanical scalability	No
Mounting height	2,50 – 4,00 m
Optimum mounting height	2,5 m
Detection angle	360 °
Angle of aperture	90 °
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Reach, radial	Ø 4 m (13 m ²)
Reach, tangential	Ø 8 m (50 m ²)

Twilight setting TEACH	No
Twilight setting	2 – 2000 lx
Time setting	8 s – 35 Min.
Switching output 1, resistive	1000 W
Switching output 1, number of LEDs / fluorescent lamps	6 pcs.
Constant-lighting control	No
Basic light level function	No
Settings via	Potentiometers
With remote control	No
Interconnection	Yes
IP-rating	IP54
Material	Plastic
Ambient temperature	-20 – 40 °C
Colour	Silver
Colour, RAL	9006
Manufacturer's Warranty	3 years
Version	inox
PU1, EAN	4007841034917

<https://www.steinel.de>

Subject to technical modifications

11.2020 Page 1 from 2

Motion detector


IS 360-1 DE

inox

EAN 4007841 034917



Detection Zone

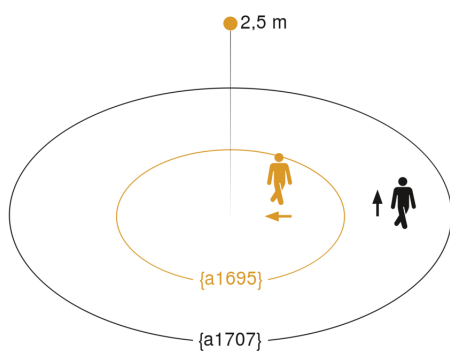

Mögliche Montagehöhe: 2,50 m – 4,00 m

Orange: radial

Schwarz: tangential

Dimension Drawing

