LUXORliving D1 DALI S RF

Item no.: 4800681



Home and Building control LUXORliving

Description

- Flush-mounted 1-way DALI actuator RF LUXORliving
- DALI-2 certified
- Interface between the DALI and the KNX bus system
- Simple commissioning of up to 30 ECGs in broadcast mode
- Control of RGB, RGBW, Tunable White or conventional luminaires
- DT-8 luminaire support
- Easy replacement of ECGs in the event of a fault
- Universal mounting thanks to the compact housing
- 2 binary inputs for potential-free contacts such as pushbuttons, switches, window contacts, temperature sensor (input I2)
- The binary input I1 is assigned to the output ex works (function test and operation even without programming)
- Integrated temperature monitoring for increased operational safety, e.g. in case of overload
- Secure communication through support of KNX Data Secure
- Download of the installation software LUXORplug at https://luxorliving.de/luxorplug




Technical data

	LUXORliving D1 DALI S RF
Operating voltage	230 V AC 50 - 60 Hz
Frequency	50 – 60 Hz
Stand-by consumption	±0.7 W
Installation type	Flush-mounted
· · · · · · · · · · · · · · · · · · ·	

	LUXORliving D1 DALI S RF
Type of connection	Terminal screws Bus connection: KNX bus terminal
Number of channels	1
Ambient temperature	-5°C 45°C
Protection class	II

Connection example




Subject to technical changes and misprints additional information at: www.theben.de/product/4800681


LUXORliving D1 DALI S RF

Item no.: 4800681



Scale drawings

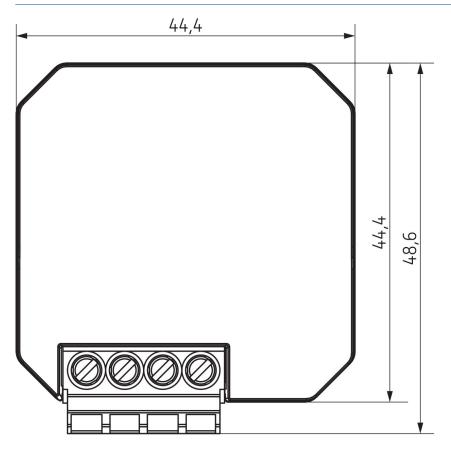

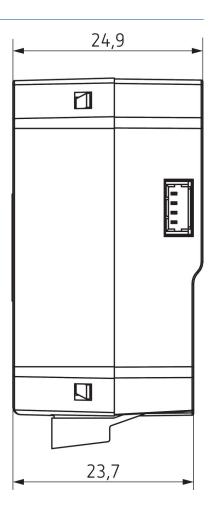

Accessories

Temperature sensor Item no.: 9070321



Temperature sensor RAMSES IP

Item no.: 9070459



Flush-mounted temperature

Item no.: 9070496

