

Motion detector - Professional Line

# sensIQ S

V3 Anthracite

EAN 4007841 059583

Article number 059583



infrared sensor 3 x  
100°



3 zones scalable  
2-20m



KNX



IP54



2 - 1000 lux



1 min - 15 min



ideal 2 - 5 m

Teach

Teach mode



energy saving

5 years

manufacturer's  
warranty  
[steinel-professional.de/garantie](https://www.steinel.de/garantie)

## Function description

The evolution of perfection. The sensIQ S is just as perfect as its larger role model. For indoors and outdoors, ideal for building entrances, loading bays, for mounting heights of up to 5 m, quadruple sensor system for optimum surveillance over 3x100° coverage angle, 20 m reach (tangential), reach setting to the accuracy of a metre in 3 independent directions. Remote control and corner wall mount bracket included.

# sensIQ S

V3 Anthracite  
 EAN 4007841 059583  
 Article number 059583




## Technical specifications

Type	Motion detectors
Dimensions (L x W x H)	128 x 114 x 74 mm
Sensor Technology	passive infrared
Application, place	Indoors, Outdoors
Installation site	wall, corner
Installation	Surface wiring
Mounting height	2 – 5,00 m
Reach, radial	r = 4 m (42 m <sup>2</sup> )
Reach, tangential	r = 20 m (1047 m <sup>2</sup> )
Reach, detail	Reach adjustable from 2 - 20 m in 3 directions (100° in each)
Detection angle	300 °
Angle of aperture	180 °
Optimum mounting height	2 m
Mechanical scalability	Yes
Sneak-by guard	Yes
Capability of masking out individual segments	Yes
Electronic scalability	No
Twilight setting TEACH	Yes

Twilight setting	2 – 1000 lx
Time setting	60 s – 15 Min.
Constant-lighting control	Yes
Basic light level function	Yes
KNX functions	Light output 2x, Presence output, Light level, Constant-lighting control, Basic light level function, Photo-cell controller, Close range, Individual pyro evaluation, Logic gate
With bus coupling	Yes
Settings via	ETS software, Remote control, Bus, Smart Remote
With remote control	Yes
Interconnection	Yes
Type of interconnection	Master/master, Master/slave
Ambient temperature	-20 – 50 °C
Application, room	multi-storey / underground car park, outdoors, warehouse, front door, all round the building, courtyard & driveway, Indoors
Colour	Anthracite
Colour, RAL	7016
Manufacturer's Warranty	5 years
Version	Anthracite
PU1, EAN	4007841059583

## Detection Zone

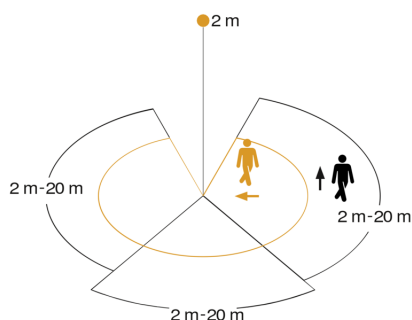

Mögliche Montagehöhe: 2,00 m – 5,00 m  
 Orange: radial  
 Schwarz: tangential  
 3 skallerbare Zonen

## Dimension Drawing

