

IR Quattro SLIM XS

DALI-2 Input Device - round
EAN 4007841 057527



infrared sensor
360°



max. 4 x 4 m
presence



IP20



10 - 1000 lux



ideal 2.5 - 4 m



5 JAHRE
HERSTELLER
GARANTIE
steinel-professional.de/garantie



CE

Function description

Noticeably Inconspicuous. IR Quattro SLIM XS, the extra-slim presence detector in concealed-box format. Fits into any standard concealed box. Overall height of just 6 mm. High-precision 360° infrared sensor with globally unique retina lens and 16 sq.m square presence detection zone (4 x 4 m). DALI-2 Input Device enables sensors to communicate collected sensor data to higher-level lighting management systems.

Technical specifications

Type	Presence detector
Dimensions (Ø x H)	94 x 50 mm
Mains power supply	16 V
Sensor Technology	passive infrared
Application, place	Indoors
Installation site	ceiling
Installation	Concealed wiring
Mounting height	2,50 – 4,00 m
Reach, radial	4 x 4 m (16 m ²)
Reach, tangential	4 x 4 m (16 m ²)
Reach, presence	4 x 4 m (16 m ²)
Reach, detail	Retina lens and hexagonal Fresnel structure
Detection angle	360 °
Angle of aperture	71 °
Switching zones	408 switching zones
Optimum mounting height	2,8 m
Mechanical scalability	No
Sneak-by guard	Yes
Capability of masking out individual segments	No
Electronic scalability	No

Twilight setting TEACH	No
Twilight setting	10 – 1000 lx
Time setting	30 s – 30 Min.
Switching output 2, floating	No
Control output, Dali	Addressable/slave
Constant-lighting control	Yes
Basic light level function	No
Settings via	Bus
With remote control	No
Interconnection	Yes
Type of interconnection	Master/slave
IP-rating	IP20
Material	Plastic
Ambient temperature	0 – 40 °C
Application, room	one-person office, hotel room, care room, function room / ancillary room, WC / washroom, Indoors
Colour	white
Colour, RAL	9010
Manufacturer's Warranty	5 years
Version	DALI-2 Input Device - round
PU1, EAN	4007841057527

Presence detector - Professional Line

IR Quattro SLIM XS


DALI-2 Input Device - round
EAN 4007841 057527



Accessories


EAN 4007841 009151 Remote control Smart Remote

Detection Zone

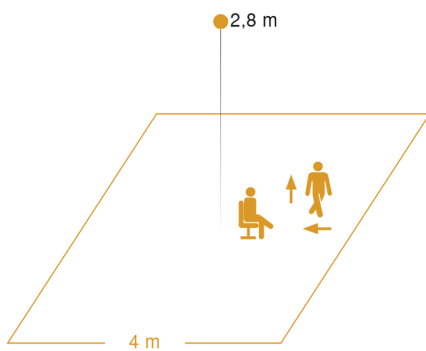

Mögliche Montagehöhe: 2,50 m – 4,00 m
Orange: Präsenz, tangential und radial

Dimension Drawing

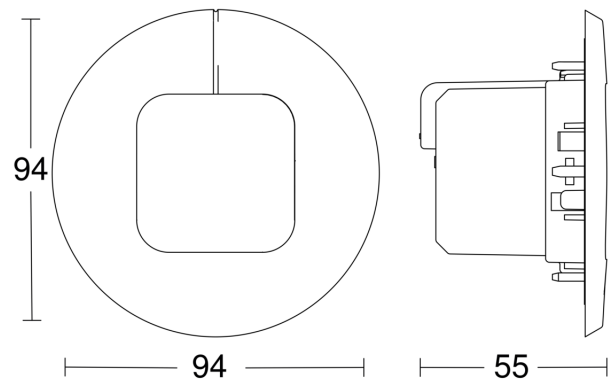

Circuit diagram

