


Sensor-switched outdoor light

# L 20

Anthracite

EAN 4007841 035693



## Function description

Ambience lighting squared. Designer sensor-switched outdoor light L 20, ideal for building entrances and building fronts, 180° angle of coverage, reach up to 10 m, selectable time and twilight threshold, sensor tilts through 90° for exact adjustment of the detection zone, stainless-steel trim panel.

## Technical specifications

|                                               |                              |
|-----------------------------------------------|------------------------------|
| Dimensions (L x W x H)                        | 85 x 230 x 250 mm            |
| Mains power supply                            | 230 – 240 V / 50 Hz          |
| Mounting height max.                          | 3,00 m                       |
| Sensor Technology                             | passive infrared             |
| Output                                        | 60 W                         |
| Interconnection                               | No                           |
| Slave modeselectable                          | No                           |
| With lamp                                     | No                           |
| Lamp                                          | All-purpose lamp             |
| Base                                          | E27                          |
| With motion detector                          | Yes                          |
| Detection angle                               | 180 °                        |
| Sneak-by guard                                | Yes                          |
| Capability of masking out individual segments | Yes                          |
| Electronic scalability                        | No                           |
| Mechanical scalability                        | No                           |
| Reach, radial                                 | r = 3 m (14 m <sup>2</sup> ) |

|                            |                                |
|----------------------------|--------------------------------|
| Reach, tangential          | r = 10 m (157 m <sup>2</sup> ) |
| Photo-cell controller      | Yes                            |
| Twilight setting           | 2 – 2000 lx                    |
| Time setting               | 8 s – 35 Min.                  |
| Basic light level function | No                             |
| Soft light start           | No                             |
| Impact resistance          | IK07                           |
| IP-rating                  | IP44                           |
| Protection class           | II                             |
| Ambient temperature        | -20 – 40 °C                    |
| Housing material           | Stainless steel                |
| Cover material             | Plastic, opal                  |
| Manufacturer's Warranty    | 3 years                        |
| Settings via               | Potentiometers                 |
| Cover material             | sticker                        |
| Version                    | Anthracite                     |
| PU1, EAN                   | 4007841035693                  |

Sensor-switched outdoor light


# L 20

Anthracite

EAN 4007841 035693



## Detection Zone

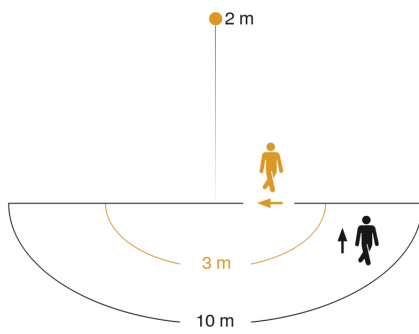

Mögliche Montagehöhe: 1,80 m – 3,00 m

Orange: radial

Schwarz: tangential

## Dimension Drawing

